

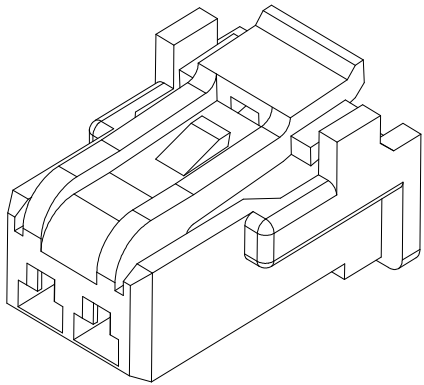
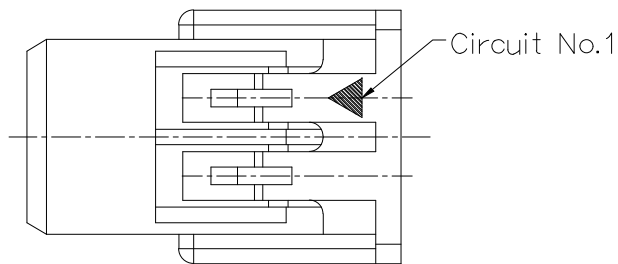
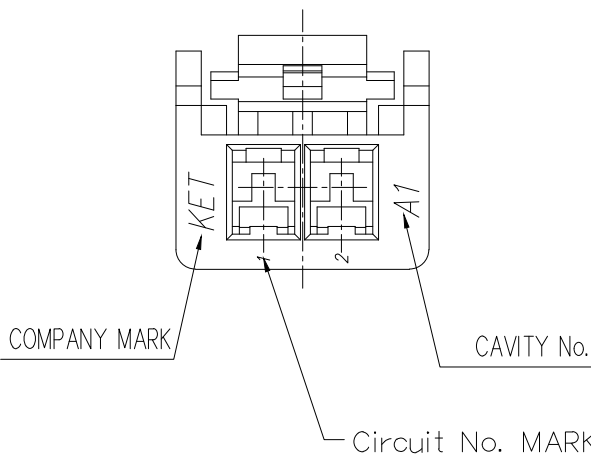
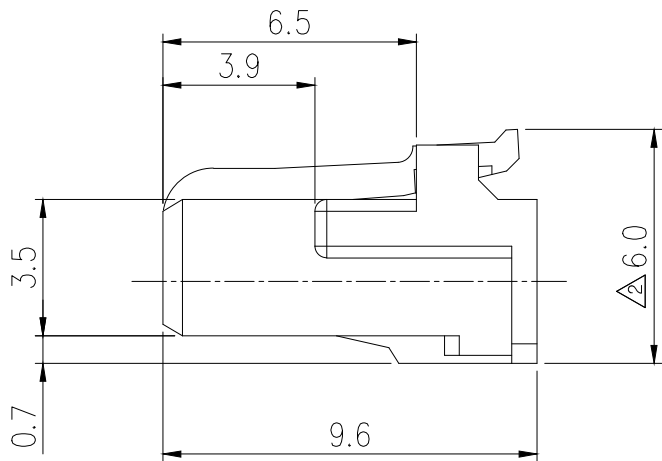


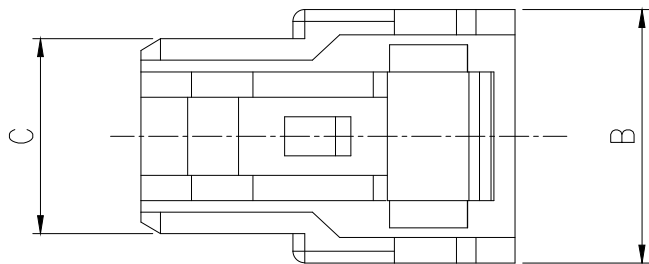

< ISO VIEW >

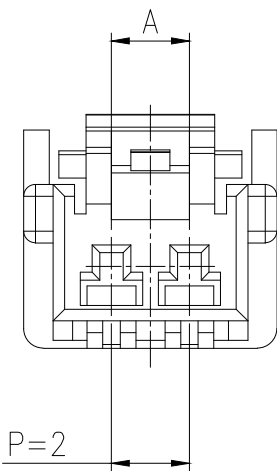

* AVAILABLE CIRCUITS

Circuits (N)	Part No.	Color(**)	Dimension		
			A	B	C
2	K100232-**	Blank:Natural / 20:Blue / 30:Yellow / 50:Black	2.0	6.5	5.0
3	K100233-**	Blank:Natural / 20:Blue / 30:Yellow / 50:Black	4.0	8.5	7.0
4	K100234-**	Blank:Natural / 20:Blue / 30:Yellow / 50:Black	6.0	10.5	9.0

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

- 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
- 적용 TERMINAL : K200294-20 / K200294-30 / ST741356-G
- 제품 내 함유된 10대 유해물질 (Pb, Hg, Cd, Cr+6, PBBs, PBDEs, DEHP, DBP, BBP, DIBP)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.
- ES91500-03 / E91500-02 / MS201-02 SPEC.에 준할 것.

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNTION.
- APPLICABLE TERMINAL : K200294-20 / K200294-30 / ST741356-G
- 10 HAZARDOUS SUBSTANCES IN PARTS (Pb, Hg, Cd, Cr+6, PBBs, PBDEs, DEHP, DBP, BBP, DIBP) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION
- MUST BE SATISFIED WITH ES91500-03 / E91500-02 / MS201-02 SPEC



ISSUE MARK

						MATERIAL		NYLON	 KOREA ELECTRIC TERMINAL CO., LTD.		
						FINISH		SEE TABLE			
						WIRE RANGE				CLASS	Wire to Board
						INSULATION				TYPE	2.0mm Pitch SMD
	2P, 3P, 4P LEVER 높이 변경, 도면 분리	LKN	YSW	SSH	20.08.19						
	품번 추가 및 주기 변경	LKN		SSH	19.05.16						
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED		SCALE	PART NO.		
						SEE TABLE		5/1	SEE TABLE		
DR.	HC. KWON 2013.04.15	CHK.									
CHK.		APP. MK.SONG 2013.04.15				PART NAME				2.0 Wire to Board PLUG HOUSING II	1/2