


GENERAL TOLERANCE (HOUSING)						USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1

주 기




1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
2. 적용 TERMINAL : K200294-20
3. 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.
4. AVAILABLE CIRCUITS

Circuits (N)	Dimensions			Part Information	
	A	B:0.1	C:0.05	Part No.	Color (**)
2	2.00	6.5	5.0	K100232-**-**	00 : Natural
3	4.00	8.5	7.0	K100233-**-**	20 : Blue
4	6.00	10.5	9.0	K100234-**-**	30 : Yellow
6	10.00	14.5	13.0	K100235-**-**	50 : Black

5. ES91500-03 SPEC.에 준할 것.

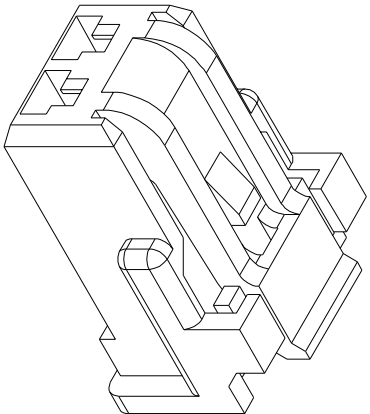

ISOMETRIC VIEW

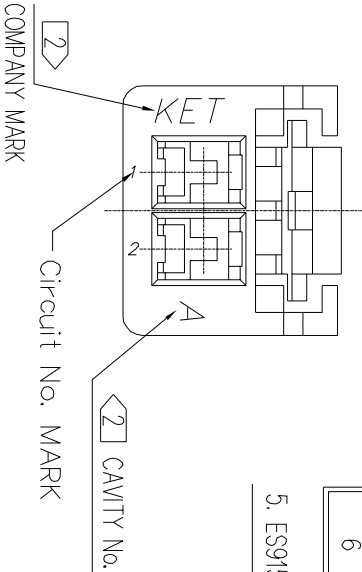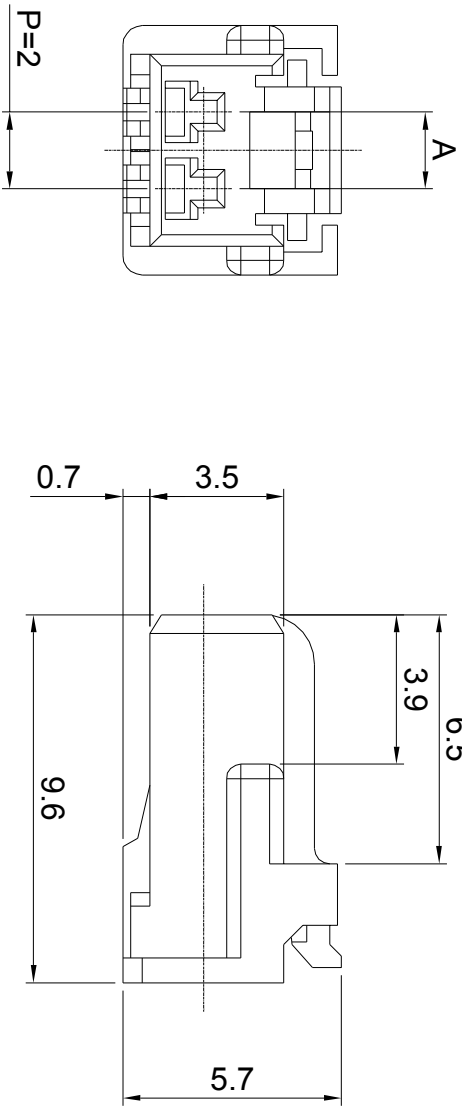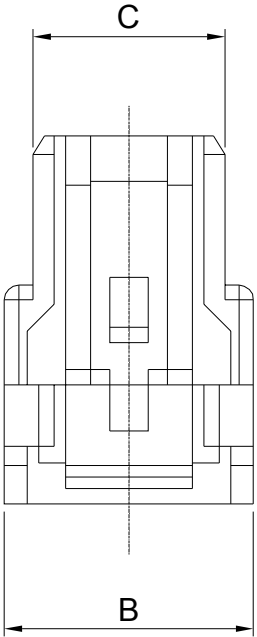

NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNTION.
2. APPLICABLE TERMINAL : K200250-20
3. 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION
4. COLOR CODE (**)00 – NATURAL/WHITE, 20 – BLUE30 – YELLOW, 50 – BLACK



ISSUE MARK

						MATERIAL	NYLON	K/E/T KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.			
						FINISH	NATURAL				
						WIRE RANGE					
						INSULATION		CLASS	Wire to Board		
								TYPE	2.0mm Pitch RA SMD		
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED		SEE TABLE	SCALE	PART NO.	K1002**-**
DR.	HC, KWON 2013.04.15	CHK.						PART NAME	2.0 Wire to Board PLUG HOUSING II		
CHK.		APP.	MK, SONG 2013.04.15								

CUSTOMER DRAWING

PART NO. K1002**-**

(DIMENSIONS IN MM)