
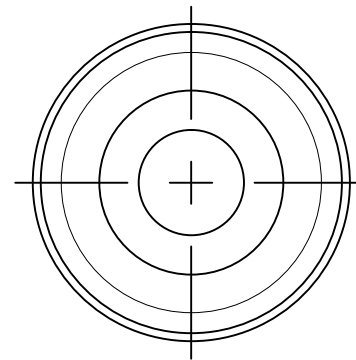
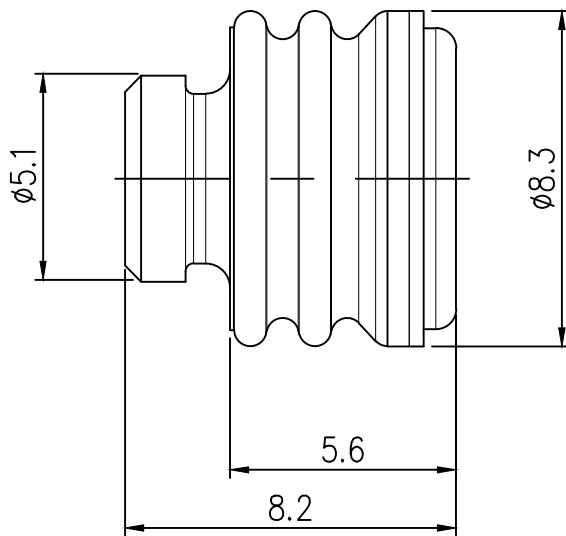
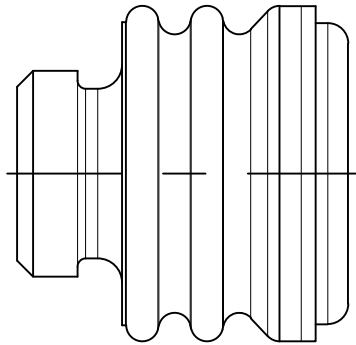




1. 기능상 유해한 흄, 변형 및 BURR가 없을 것.
2. HKMC ES 91500-00 SPEC 에 준할 것.
3. MS 201-02 SPEC 에 준할 것.
4. MS 300-08 SPEC 에 준할 것.

GENERAL TOLERANCE (SILICONE RUBBER)							USED ON
10MAX	50MAX	100MAX	250MAX	250OVR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1	

						MATERIAL SILICONE		 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH BLUE			
						WIRE RANGE 		CLASS RF	
						INSULATION 		TYPE PLUG	
	RELEASE	pjm khc	smk	14.09.11					
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED		SCALE 5:1	PART NO. KR00801-20
DR.	P.J.M 14.09.11	CHK. K.H.C 14.09.11			PART NAME WP FAKRA WIRE SEAL (ø3.0)				
CHK.		APP. S.M.K 14.09.11							