
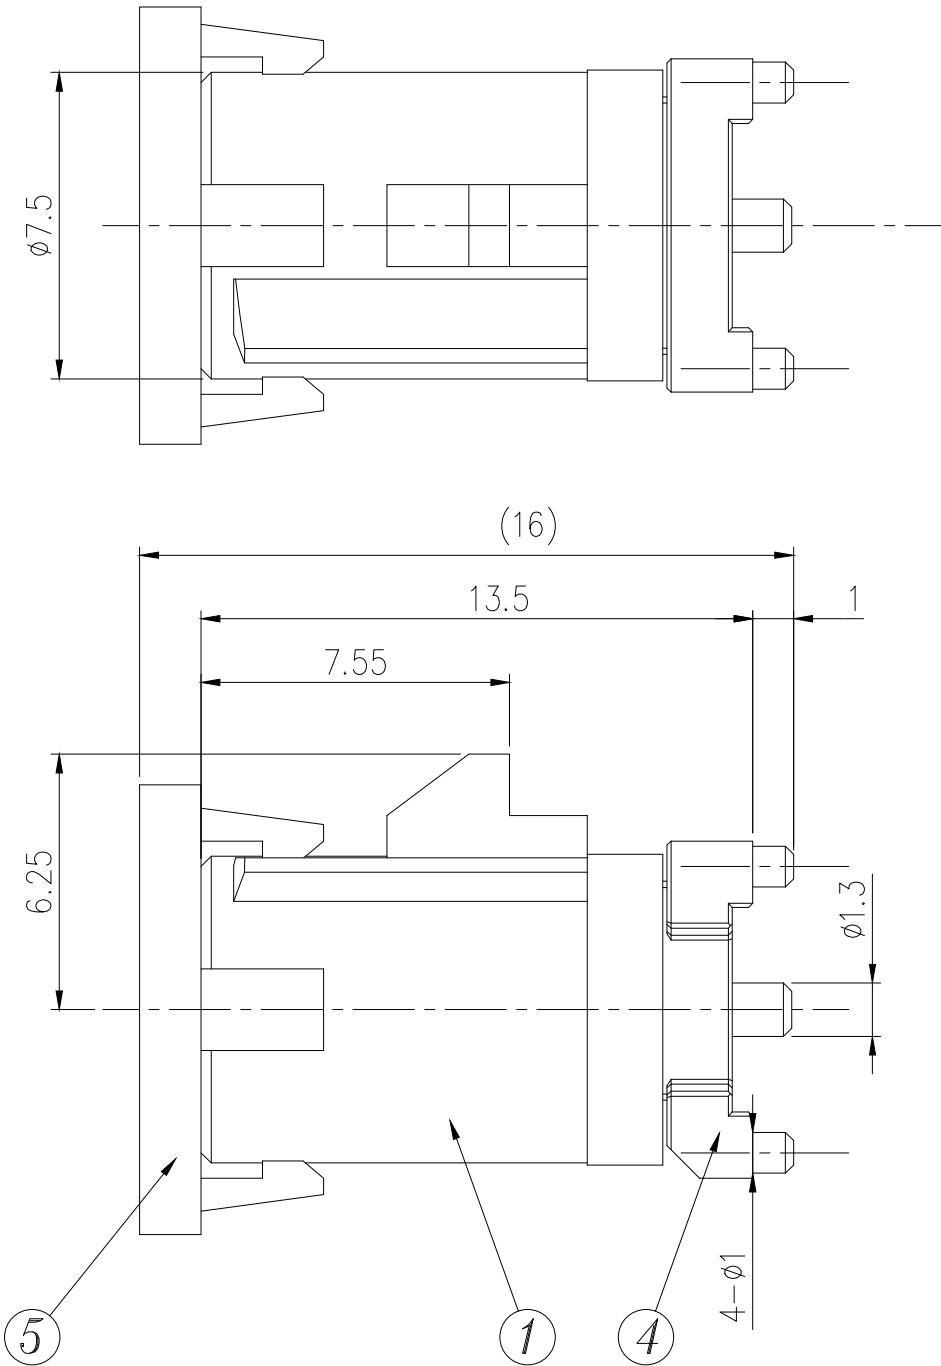
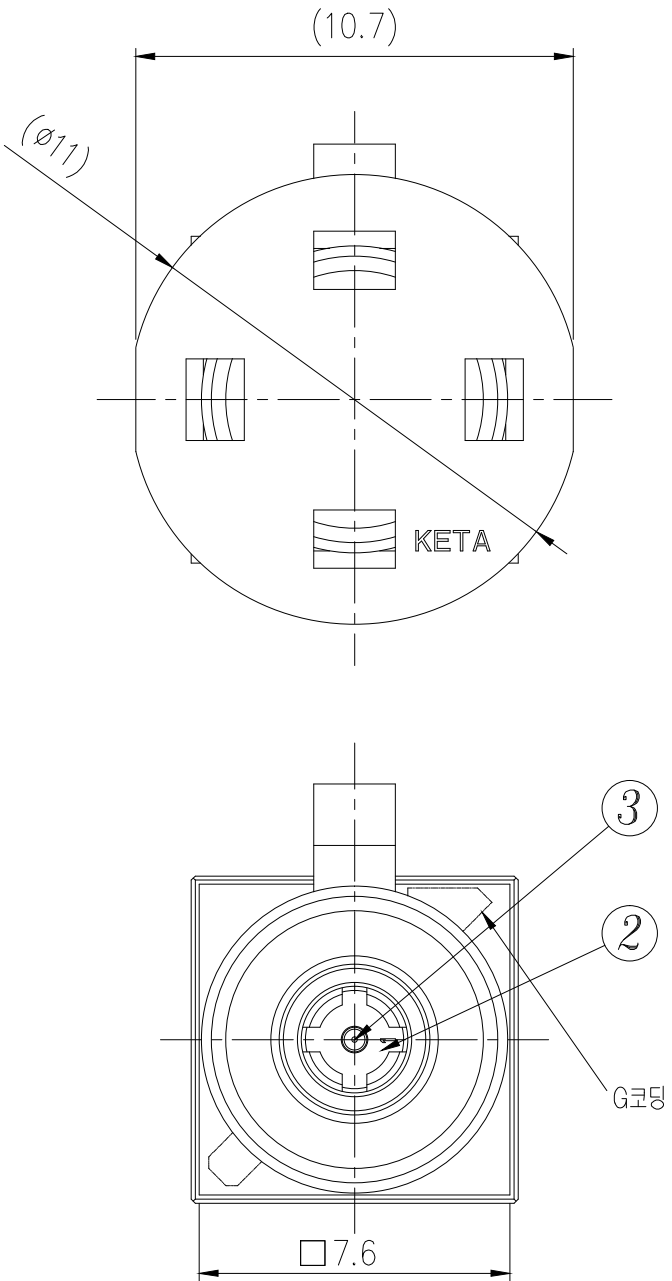



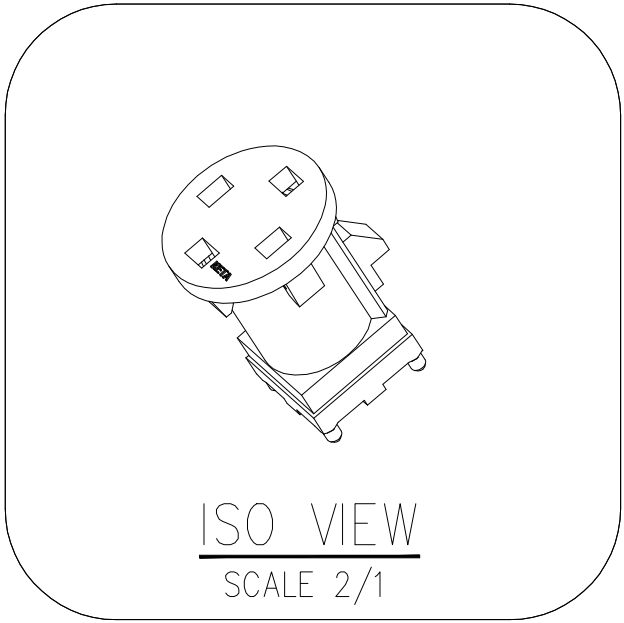


주 기

1. 기능상 유해한 흠, 변형 및 BURR 없을 것.
2. HKMC ES 91500-03 SPEC 에 준할 것.
3. DC to 6 GHz, VSWR 1:2 이하

10 hazardous substances in parts (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs, DEHP, DBP, BBP, DIBP) shall not exceed the maximum permissible concentration prescribed under EU ELV Directive & RoHS Regulation.

GENERAL TOLERANCE (ASSY)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

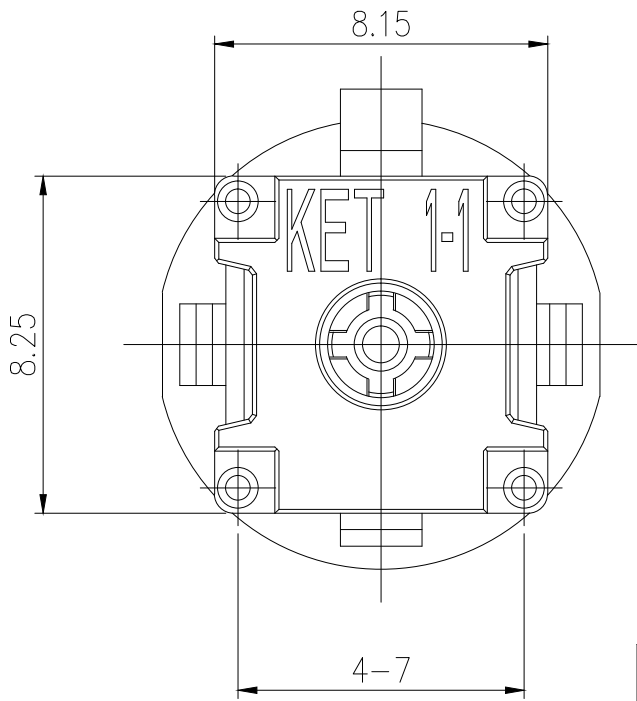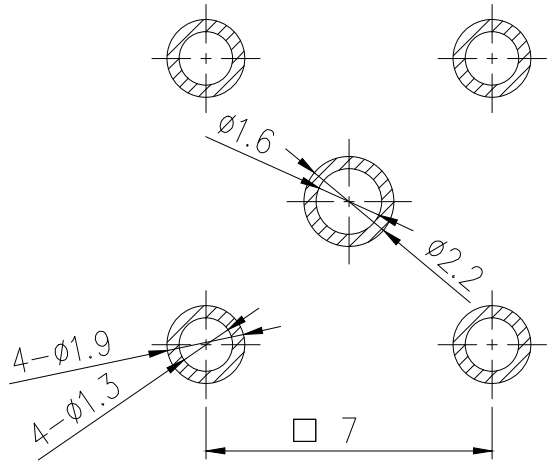

5	CAP	PA46	BLACK	-	1	
4	SHELL	ZINC ALLOY	-	Ni+Sn	1	
3	CONTACT	BRASS	-	Ni+Au	1	
2	IN HOUSING	PA6T	BLACK	-	1	
1	OUT HOUSING	PA4T	GRAY	-	1	
No.	Part Name	Material	Color	Fnish	Q'ty	Remark

					MATERIAL		
					FINISH SEE NOTE		
					WIRE RANGE		
	RELEASE	JYH	PJM	KHC	18.03.20	INSULATION	
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 5:1
DR.	J.Y.H.18.02.26	CHK.	K.U.H.18.02.26				
CHK.	P.J.M.18.02.26	APP.	K.H.C.18.02.26				
						PART NO. KR11006-DG	

APPROVED	
2019-11-06	
KOREA ELECTRIC TERMINAL CO., LTD. Korea Electric Te rminal Co., LTD.	
ISSUE MARK	
KETA KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.	
FAKRA	
PCB CONN"	
PART NAME FAKRA VH13.5 WAFER ASSY	
1 / 1	