


주 기

1. LEAD 평판도 관리 치수 형.



2. CODING KEY는 TABLE "A" 참고할 것

3. 포장 사항 : EMBOSS TAPE(500 EA/1)

4. HKMC ES 91500-03 SPEC 에 준할 :

*6 hazardous substances in parts (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) shall not exceed the maximum permissible concentration prescribed under EU ELV Directive & RoHS Regulation."

4	CONTACT	BRASS	-	NI + AU	1		
3	SHELL	PHOSPHOR BRONZE	-	OS + P	1		
2	HANGING	LOCK	BLACK	-	1		
1	TOP HOLE	PAKE	IN CASE	-	1		
Part No		Material	Color	Finish	Qty	Remark	ISSUE MARK
LTP		REFETCH BOARD	OK	2015.01.12	DATE	 KET KOREA ELECTRIC TERMINAL CO., LTD. TYPE RE CONN	
P		P.12/13/16	OK	2015.01.12	DATE	CLASS SCALE 4:1 PCB CMT SMD Type ORDER WORK SHEET (S) 1/3	
CRK		OK	2015.01.12	DATE	PART NO USE TABLE "A"		



FAKRA WAFER SMD TYPE LINE UP

CODING	COLOR	PART No.	PART Name.	AVAILABLE CODING	
	A	BLACK	KR15001-SA	FAKRA WAFER ASSY(SMD_A)	0
	B	WHITE	KR15001-SB	FAKRA WAFER ASSY(SMD_B)	0
	C	BLUE	KR15001-SC	FAKRA WAFER ASSY(SMD_C)	0
	D	BORDEAUX VIOLET	-	-	-
	E	GREEN	KR15001-SE	FAKRA WAFER ASSY(SMD_E)	0
	F	BROWN	KR15001-SF	FAKRA WAFER ASSY(SMD_F)	0
	G	GRAY	-	-	-
	H	VIOLET	-	-	-
	I	BEIGE	-	-	-
	K	CURRY	-	-	-
	Z	WATER BLUE	-	-	-

TABLE "A"




				 KOREA ELECTRIC THERMAL CO., LTD.	
				CLASS RF CONN.	
				TYPE PCB CUT SMD Type	
				FAKRA WAVE ASSLY(SMD.) 2 / 2	

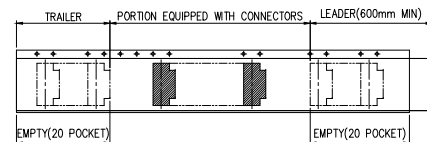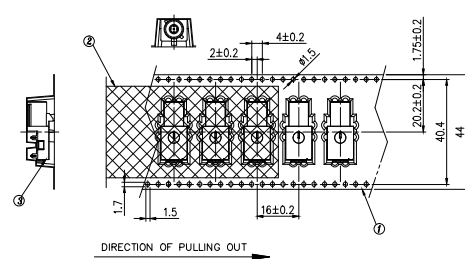


DIRECTION OF PULLING OUT _____

REEL DIMENSION
(S = N / S)

$$(S = N / 3)$$


DIRECTION OF PULLING OUT



NOTE

1. 1 REEL CONTAINS 500PCS

2. 1 BOX CONTAINS 5 REELS

[illegible]