
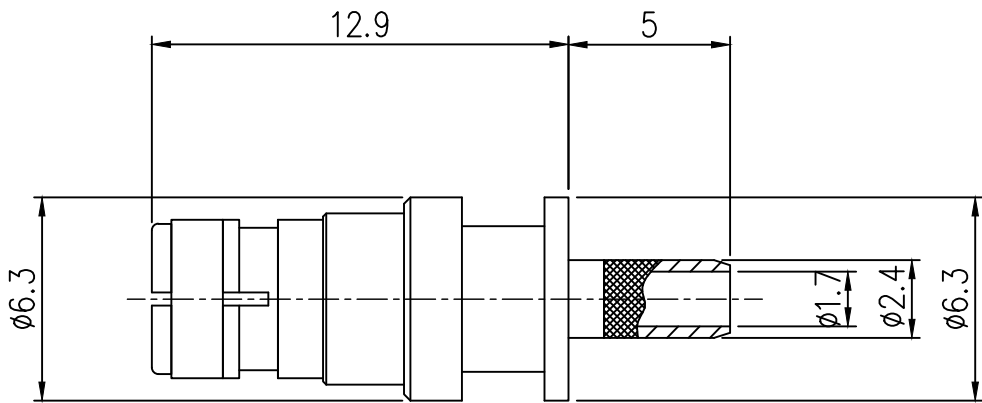


ISOMETRIC VIEW



GENERAL TOLERANCE (TERMINAL)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

주 기

- 기능상 유해한 흠, 변형 및 BURR가 없을 것.
- HKMC ES 91500-00, ES 96200-03 SPEC 에 준할 것.
- MS 301-08 중금속 관련 SPEC 에 준할 것.
- 적용부품: KR20301-20 [JACK TM'L], AU PLATE
KR00401-20 [HARNESS SLEEVE] or KR00404 [GUIDE SLEEVE]

"6 hazardous substances in parts (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) shall not exceed the maximum permissible concentration prescribed under EU ELV Directive & RoHS Regulation."

△	3	GUIDE RING	SUS	-	PRE-Ni (0.5 min)	1	
	2	SHELL	BRASS	-	Ni	1	
	1	IN HOUSING	△ PBT	NATURAL	-	1	
No.	Part Name		Material	Color	Fnish	Q'ty	Remark
					MATERIAL		
					FINISH	SEE NOTE	
△	적용부품 사양 추가		kjm	khc	smk	15.08.24	
△	GUIDE RING 추가 IN HSG 원재료 변경 (PA -> PBT)		pjm	khc	smk	15.01.10	
△	RELEASE		pjm	khc	smk	14.05.13	
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	
DR.	P.J.M 14.03.25		CHK.	K.H.C 14.03.25			
CHK.			APP.	S/M/K 14.03.25			
					TOLERANCE EXCEPT AS NOTED		
					SCALE 4:1		
					PART NO.	KR20201-20	
					PART NAME	FAKRA STRAIGHT JACK OUTER CONTACT (ø3.0)	

한국전자공업주식회사

출

2015.10.23

도

제조 / 개 발

ISSUE MARK

KIET
ENGINEERED

KOREA ELECTRIC
TERMINAL CO., LTD.

CLASS
RF CONN"

TYPE
W TO B (W)

PART NAME
FAKRA STRAIGHT JACK
OUTER CONTACT (ø3.0)