
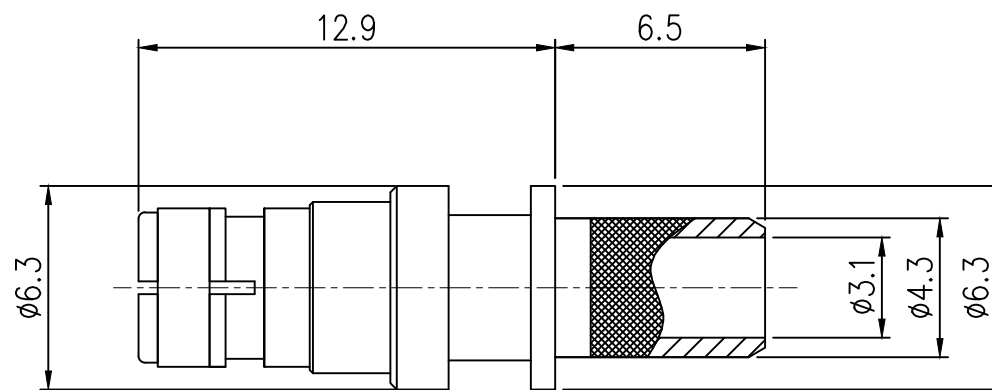


ISOMETRIC VIEW




GENERAL TOLERANCE (TERMINAL)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

주 기

1. 기능상 유해한 흠, 변형 및 BURR가 없을 것.
2. HKMC ES 91500-00, ES 96200-03 SPEC 에 준할 것.
3. MS 301-08 종금속 관련 SPEC 에 준할 것.

"6 hazardous substances in parts (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) shall not exceed the maximum permissible concentration prescribed under EU ELV Directive & RoHS Regulation."

3	GUIDE RING	SUS	-	PRE-Ni (0.5 min)	1			
2	SHELL	BRASS	-	Ni	1			
1	IN HOUSING	PBT	BLACK	-	1			
No.	Part Name	Material	Color	Fnish	Q'ty	Remark		
							ISSUE MARK	
								
						MATERIAL		
						FINISH SEE NOTE		
						WIRE RANGE		
						INSULATION		
	RELEASE	pjm khc smk	15.01.16				CLASS RF CONN"	
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 4:1	TYPE W TO B (W)
DR.	P.J.M 14.03.25	CHK.	K.H.C 14.03.25					
CHK.		APP.	S/M/K 14.03.25			PART NO. KR20201-30	PART NAME FAKRA STRAIGHT JACK OUTER CONTACT (#5.0)	



ISSUE MARK

IKIET KOREA ELECTRIC
ENGINEERED TERMINAL CO., LTD.

CLASS	RF CONN"
-------	----------

<i>TYPE</i>	W TO B (W)
-------------	------------

PART NAME	FAKRA STRAIGHT JACK OUTER CONTACT (ø5.0)
------------------	---