

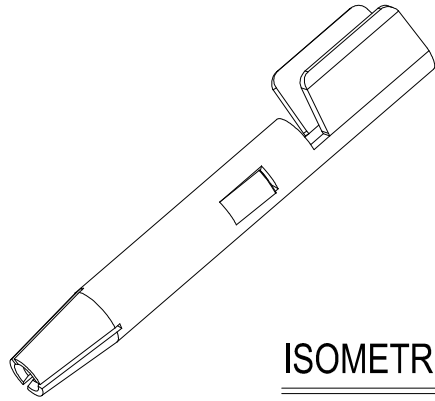



(DIMENSIONS IN MM)

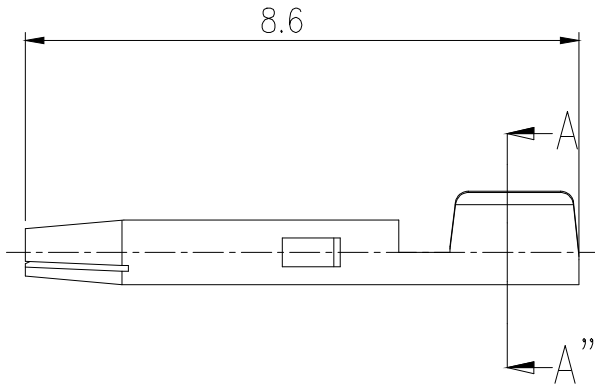

ISOMETRIC VIEW







Section A-A''
(Scale 8:1)

GENERAL TOLERANCE (TERMINAL)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

주 기

1. 기능상 유해한 흠, 변형 및 BURR가 없을 것.
2. HKMC ES 96200-03, ES 91500-02 SPEC 에 준할 것.
3. MS 201-02 중금속 관련 SPEC 에 준할 것.

"6 hazardous substances in parts (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) shall not exceed the maximum permissible concentration prescribed under EU ELV Directive & RoHS Regulation."

1	TERMINAL	 COPPER ALLOY		—	Au+Sn		1		ISSUE MARK
No.	Part Name	Material		Color	Finish	Q'ty	Remark		
					MATERIAL 		 KOREA ELECTRIC TERMINAL CO., LTD.		
					FINISH SEE NOTE				
	주기란 MS규격 사양 변경	ash	kuh	khc	20.03.10	WIRE RANGE 		CLASS RF CONN"	
	ECO-1803-103에 근거	pjm		khc	18.03.05	INSULATION 			
	RELEASE	pjm	khc	smk	14.05.13			TYPE W TO B (W)	
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED 	SCALE 4:1		
DR.	P.J.M 14.03.25	CHK. K.H.C 14.03.25				PART NO. KR20301-20		PART NAME FAKRA ST JACK TERMINAL (ø3.0)	
CHK.		APP. S/MK 14.03.25							



DESIGN REVISION NO. 2