

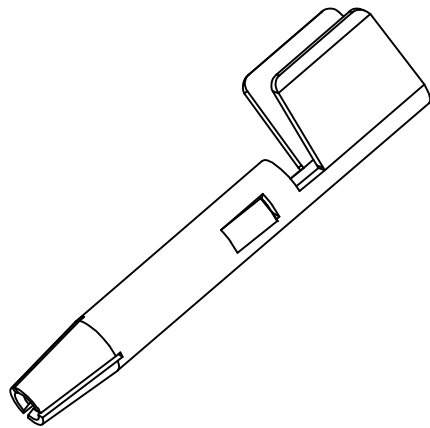

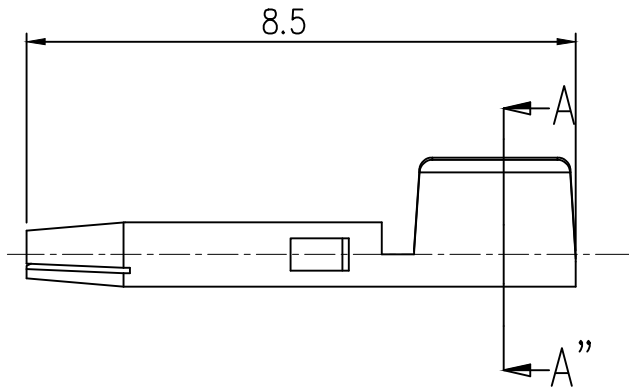


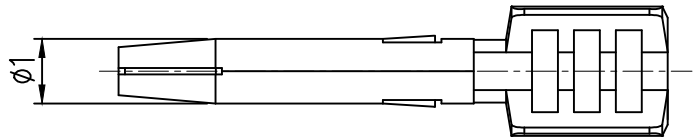

ISOMETRIC VIEW



Section A-A''
(Scale 8:1)

주 기

1. 기능상 유해한 흠, 변형 및 BURR가 없을 것.
2. HKMC ES 96200-03, ES 91500-02 SPEC 에 준할 것.
3. MS 301-08 중금속 관련 SPEC 에 준할 것.

"6 hazardous substances in parts (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) shall not exceed the maximum permissible concentration prescribed under EU ELV Directive & RoHS Regulation."

GENERAL TOLERANCE (TERMINAL)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

1	TERMINAL	PHOSPHOR BRONZE		—		Au+Sn		1		ISSUE MARK
No.	Part Name	Material		Color		Fnish		Q'ty	Remark	
						MATERIAL			 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH SEE NOTE				
						WIRE RANGE				
						INSULATION				
	RELEASE			smk	15.01.16				CLASS RF CONN"	
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED			SCALE 4:1
DR.	P.J.M 14.03.25		CHK. K.H.C 14.03.25			PART NO. KR20301-30			PART NAME FAKRA ST JACK TERMINAL (φ5.0)	
CHK.			APP. S/M/K 14.03.25							

