
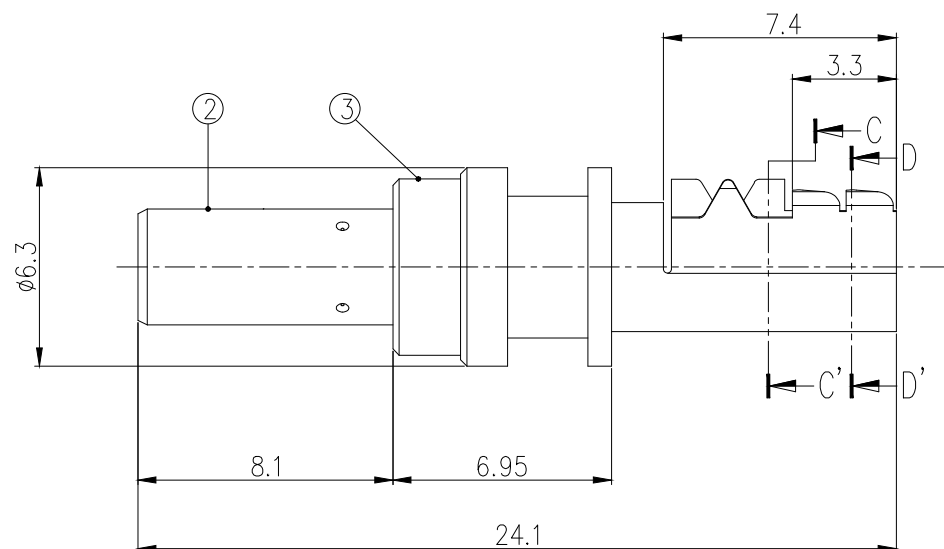




Section C-C'
(Scale 4:1)




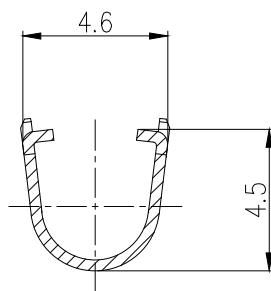


Section D-D'
(Scale 4:1)

GENERAL TOLERANCE (TERMINAL)						USED ON
10 MAX	20 MAX	45 MAX	45 VR	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±0.5	±30'	0.1	

1. 기능상 유해한 힘, 변형 및 BURR가 없을 것.
2. 적용 상대 TAB. TERMINAL : KR20203-20
3. 제품내 함유된 10대 유해물질(납,수은,카드뮴,6가크롬,PBBs, PBDEs,DEHP,DBP,BBP,DIBP)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.
4. HKMC ES91500-00 SPEC에 준할 것.
5. 적용 부품 : KR30301-20 [PLUG TM'L, Au PLATE]
KR00406-20 [SLEEVE, PRE-TIN]
△ KR00408-20 [SLEEVE, PRE-TIN]

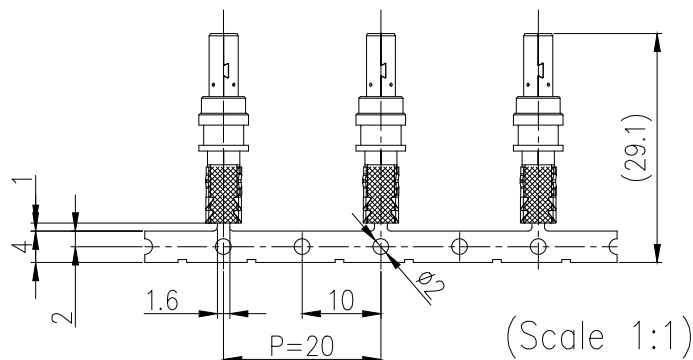

3	CIRCLE HOUSING	PBT	BLACK	—	1			
2	SHELL	COPPER ALLOY	—	PRE-TIN	1	0.35T		
1	IN HOUSING	PBT	NATURAL	—	1			
No.	Part Name	Material	Color	Finish	Q'ty	Remark	ISSUE MARK	
					MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH	SEE TABLE		
					WIRE RANGE	Ø3.0 RF CABLE		CLASS RF CONN”
					INSULATION	—		TYPE W TO W
	작용부품 추가	ash kuh khc	20.05.20		TOLERANCE EXCEPT AS NOTED	SCALE 4/1	PART NO. KR30202-20	
LTR	REVISION RECORD	DR. CHK.	APP.	DATE	SEE TABLE			
DR.	PJM. 2017.05.31	CHK.	—		PART NAME	FAKRA STRAIGHT PLUG II OUTER CONTACT (Ø3.0)		
CHK.	KHC. 2017.05.31	APP.	KHC.	2017.05.31				