

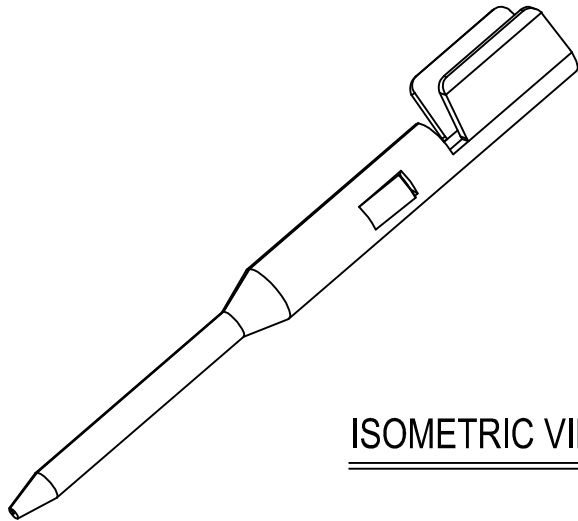



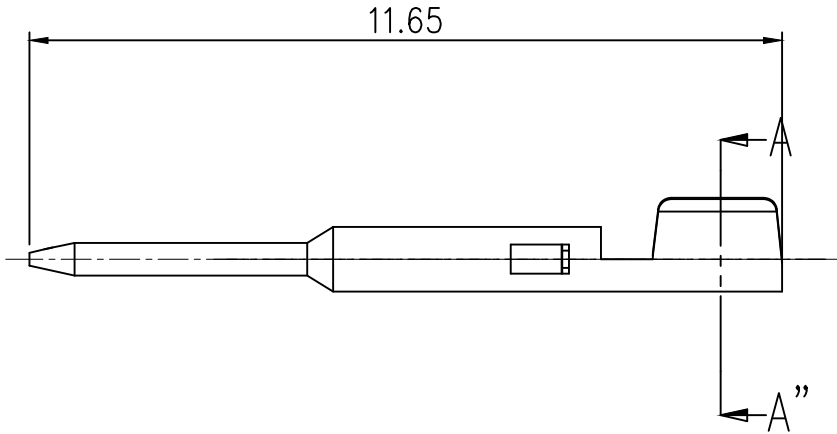

ISOMETRIC VIEW



Section A-A'
(Scale 8:1)

주 기

1. 기능상 유해한 흠, 변형 및 BURR가 없을 것.
2. HKMC ES 96200-03, ES 91500-02 SPEC 에 준할 것.
3. MS 301-08 중금속 관련 SPEC 에 준할 것.
4. 적용 전선 사양: 1.5DS-CV (105도)

"6 hazardous substances in parts (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) shall not exceed the maximum permissible concentration prescribed under EU ELV Directive & RoHS Regulation."

GENERAL TOLERANCE (TERMINAL)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

1	TERMINAL	PHOSPHOR BRONZE	—	Au+Sn	1		ISSUE MARK
No.	Part Name	Material	Color	Fnish	Q'ty	Remark	
						MATERIAL	 KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH SEE NOTE	
						WIRE RANGE	
						INSULATION	
	적용 전선 사양 추가	kjm khc	smk	15.08.24			CLASS RF CONN"
	RELEASE	pjm khc	smk	15.05.13			
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	TYPE W TO B (W)
DR.	P.J.M 14.03.25	CHK.	K.H.C 14.03.25			SCALE 4:1	
CHK.		APP.	S/M/K 14.03.25			PART NO. KR30301-20	PART NAME FAKRA ST PLUG TERMINAL (ø3.0)

