


GENERAL TOLERANCE (HOUSING)

USED ON

10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

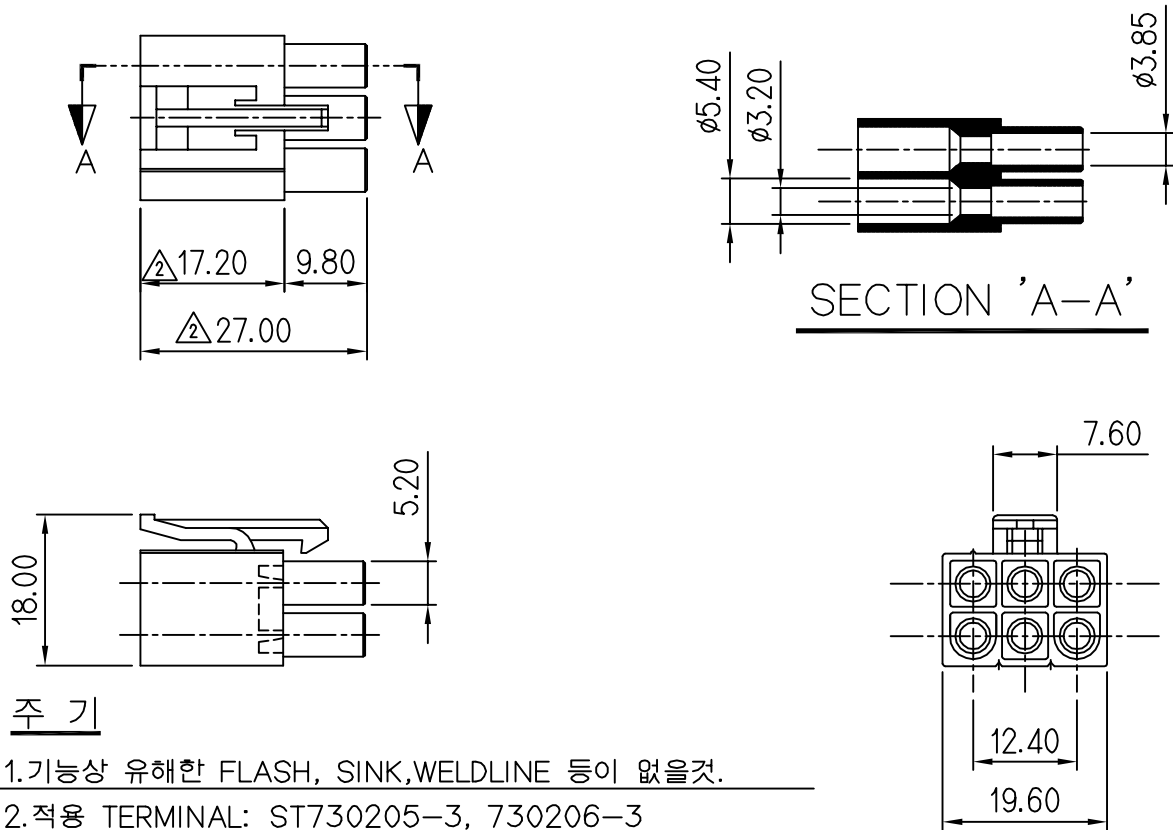

주 기

1. 기능상 유해한 FLASH, SINK, WELDLINE 등이 없을것.

2. 적용 TERMINAL: ST730205-3, 730206-3

730349-3, 730329-3

3. 적용 HOUSING: MG620015

4. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서
지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. MUST BE FREE OF FLASH, SINK, WELDLINE

AND IMPERFECTION THAT AFFECT FUNCTION.

2. APPLICABLE TERMINAL : ST730205-3, 730206-3

730349-3, 730329-3

3. APPLICABLE HOUSING: MG620015

4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY,
CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL
NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION
PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

ISSUE MARK

					MATERIAL	NYLON	 KOREA ELECTRIC TERMINAL CO., LTD.
④	설계사양변경(S110128)근거 도면 제작성			'11.04.28	FINISH	NATURAL	
③	명칭변경(φ2.0 REC 6P HSG)			'85.11.30	WIRE RANGE		CLASS GP880928
②	치수변경(현품 관리)			'85.09.19	INSULATION		TYPE
①	제번 변경 (GP880928)			'85.09.11	TOLERANCE EXCEPT AS NOTED	SEE TABLE	PART NO.
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	SCALE 1/1	① MG610016
DR.	84 7/3	CHK.			PART NAME		
CHK.	S. w	APP.			③ φ2.0 PLUG HOUSING 6P		