
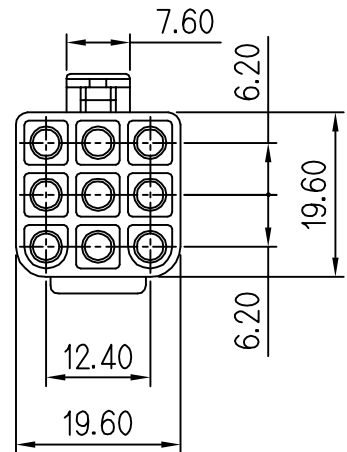
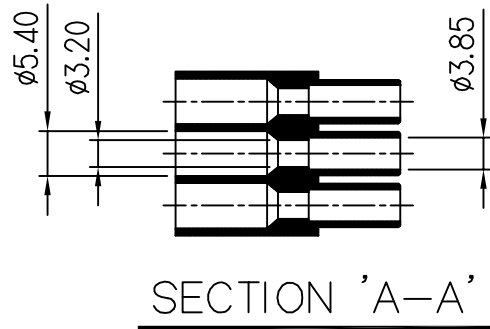


GENERAL TOLERANCE (HOUSING)

USED ON

10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

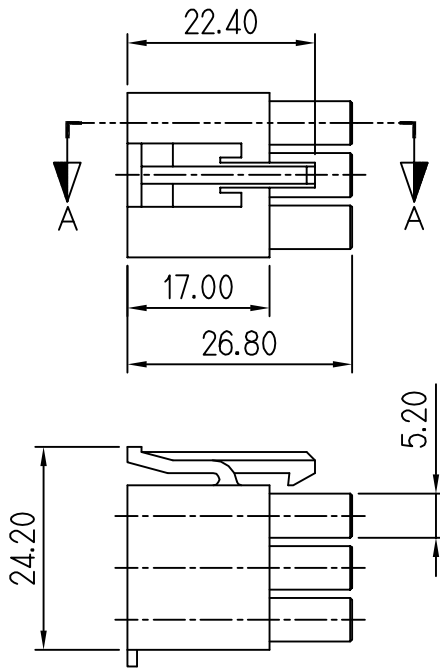

주 기

1. 기능상 유해한 FLASH, SINK, WELDLINE 등이 없을것.

2. 적용 TERMINAL: ST730205-3, 730206-3
730349-3, 730329-3

3. 적용 HOUSING: MG620017

4. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서
지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. MUST BE FREE OF FLASH, SINK, WELDLINE

AND IMPERFECTION THAT AFFECT FUNCTION.

2. APPLICABLE TERMINAL : ST730205-3, 730206-3
730349-3, 730329-3

3. APPLICABLE HOUSING: MG620017

4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL
NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION
PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

ISSUE MARK

KIET KOREA ELECTRIC
ENGINEERED TERMINAL CO., LTD.

					MATERIAL	NYLON	
					FINISH	NATURAL	
3	실개사양변경(S110128)근거 도면 제작성	확인	확인	확인	'11.04.28		
2	명칭변경(전 2.0 REC 9P HSG)	확인			'85.11.29		
1	제번 변경 (GP880930)	확인			'85.09.13		
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE
DR.	85 2/11	CHK.				SEE TABLE	1/1
CHK.	J. W. K	APP.				PART NAME	PART NO.
						2.0 2.0 PLUG HOUSING 9P	1 MG610018