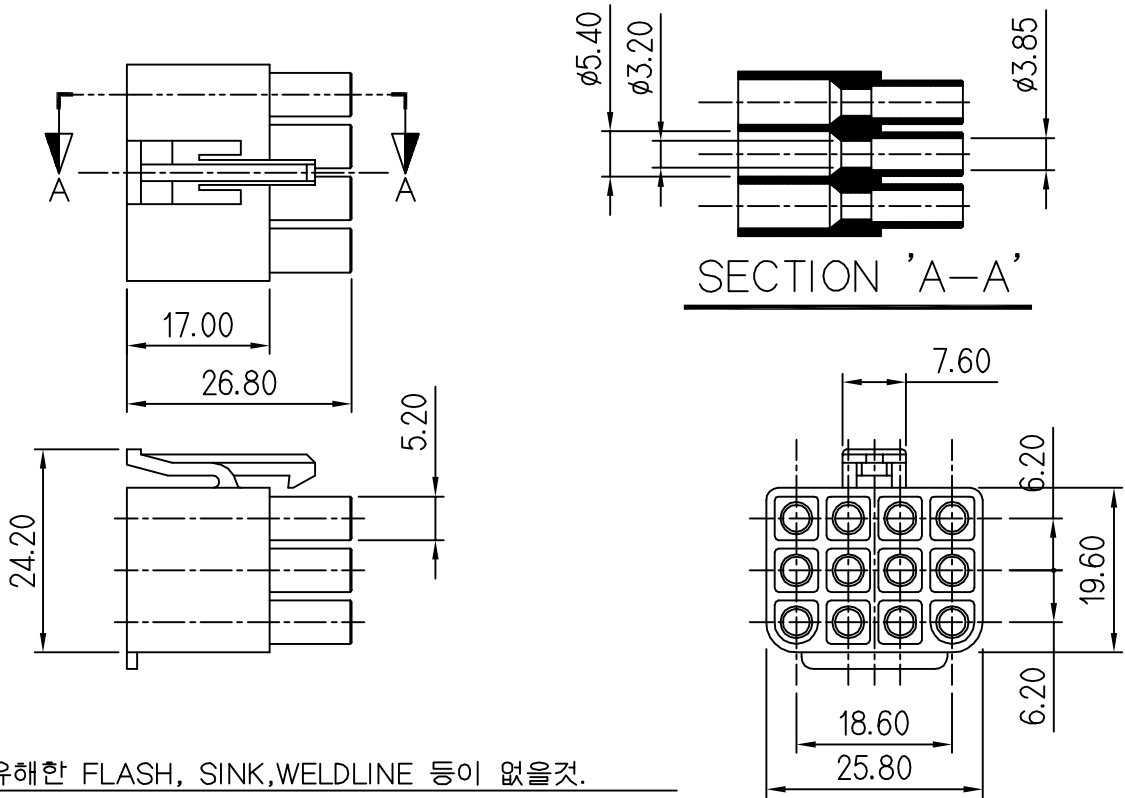


GENERAL TOLERANCE (HOUSING)

USED ON

10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	





주 기

1. 기능상 유해한 FLASH, SINK, WELDLINE 등이 없을것.
2. 적용 TERMINAL: ST730205-3, 730206-3
730349-3, 730329-3
3. 적용 HOUSING: MG620019
4. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. MUST BE FREE OF FLASH, SINK, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST730205-3, 730206-3
730349-3, 730329-3
3. APPLICABLE HOUSING: MG620019
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

ISSUE MARK

					MATERIAL		NYLON	 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH		NATURAL		
③	실개사양변경(S110128)근거 도면 재작성			'11.04.28	WIRE RANGE		CLASS		GP880932
②	명칭변경(전 2.0 REC 12P HSG)			'85.11.29	INSULATION		TYPE		
①	제번 변경 (GP8809312)			'85.09.13					
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.
DR.	 85 2/11		CHK.				SEE TABLE	1/1	① MG610020
CHK.	 S. W. KEE		APP.			 W. J. KIM	PART NAME		
						② 2.0 PLUG HOUSING 12P			