


GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

△ 주 기

1. 적용 HSG : MG620023,620023R,620040,620040R
적용 FEMALE TERMINAL : ST730291-3, 730292-3
2.제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬 PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.



△

NO.	PART NO.	MATERIAL
1	MG610024	NYLON [V2]
2	MG610024R	NYLON [V0]

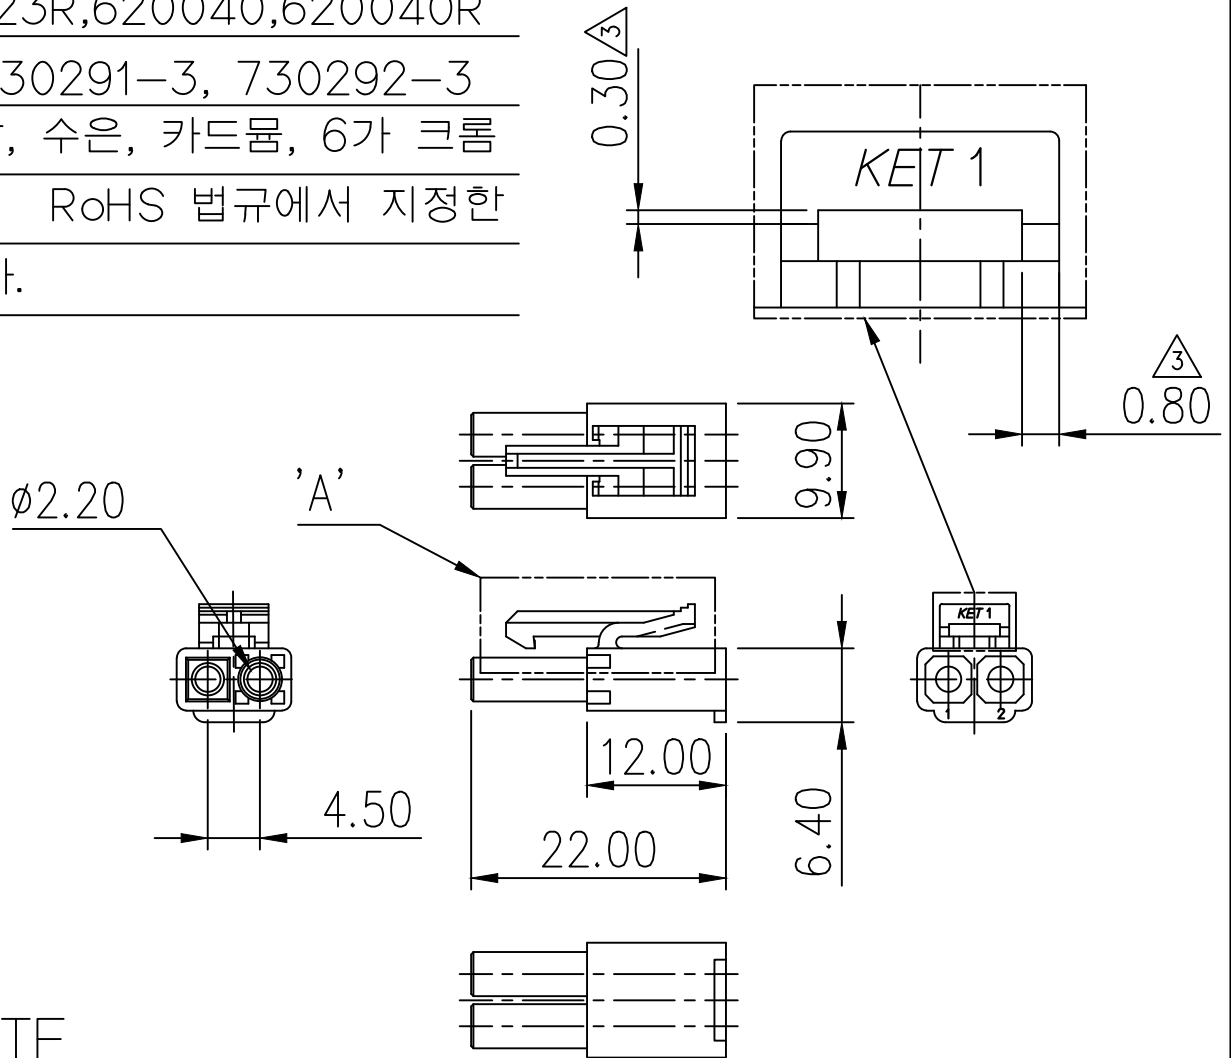


△ NOTE

1. APPLICABLE HSG : MG620023,620023R,620040,620040R
APPLICABLE FEMALE TERMINAL : ST730291-3, 730292-3
2. 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

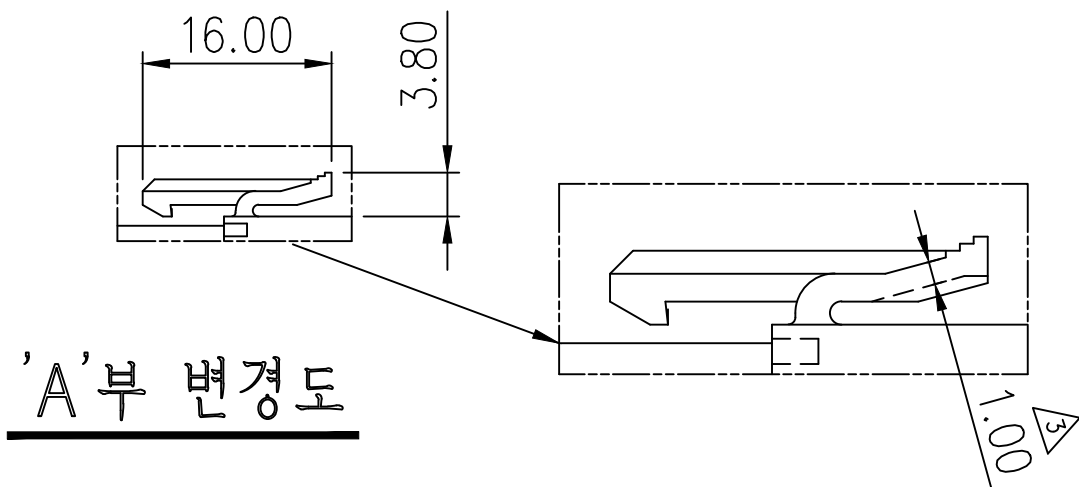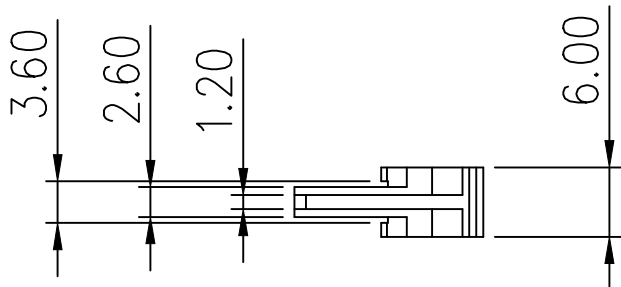

ISSUE MARK

△5	설계사양변경(S110128)의거 도면 재작성	DR.	CHK.	APP.	DATE	MATERIAL	△ SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.
△4	설계사양변경 'S090052' 근거 도면수정	DR.	CHK.	APP.	DATE	FINISH	NATURAL	
△3	설계변경 '040125' 의거 형상변경	DR.	CHK.	APP.	DATE	WIRE RANGE		
△2	LOCK부 변경(제품개선)	DR.	CHK.	APP.	DATE	INSULATION		
△1	명칭변경(전ø1.3 REC. 2P HSG)	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	±0.3	
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	SCALE	1/1	PART NO.
DR.	85 9/15	CHK.				PART NAME	△1	△ MG610024, MG610024R
CHK.	J. W. K	APP.				ø1.3 PLUG HOUSING 2P		