


GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

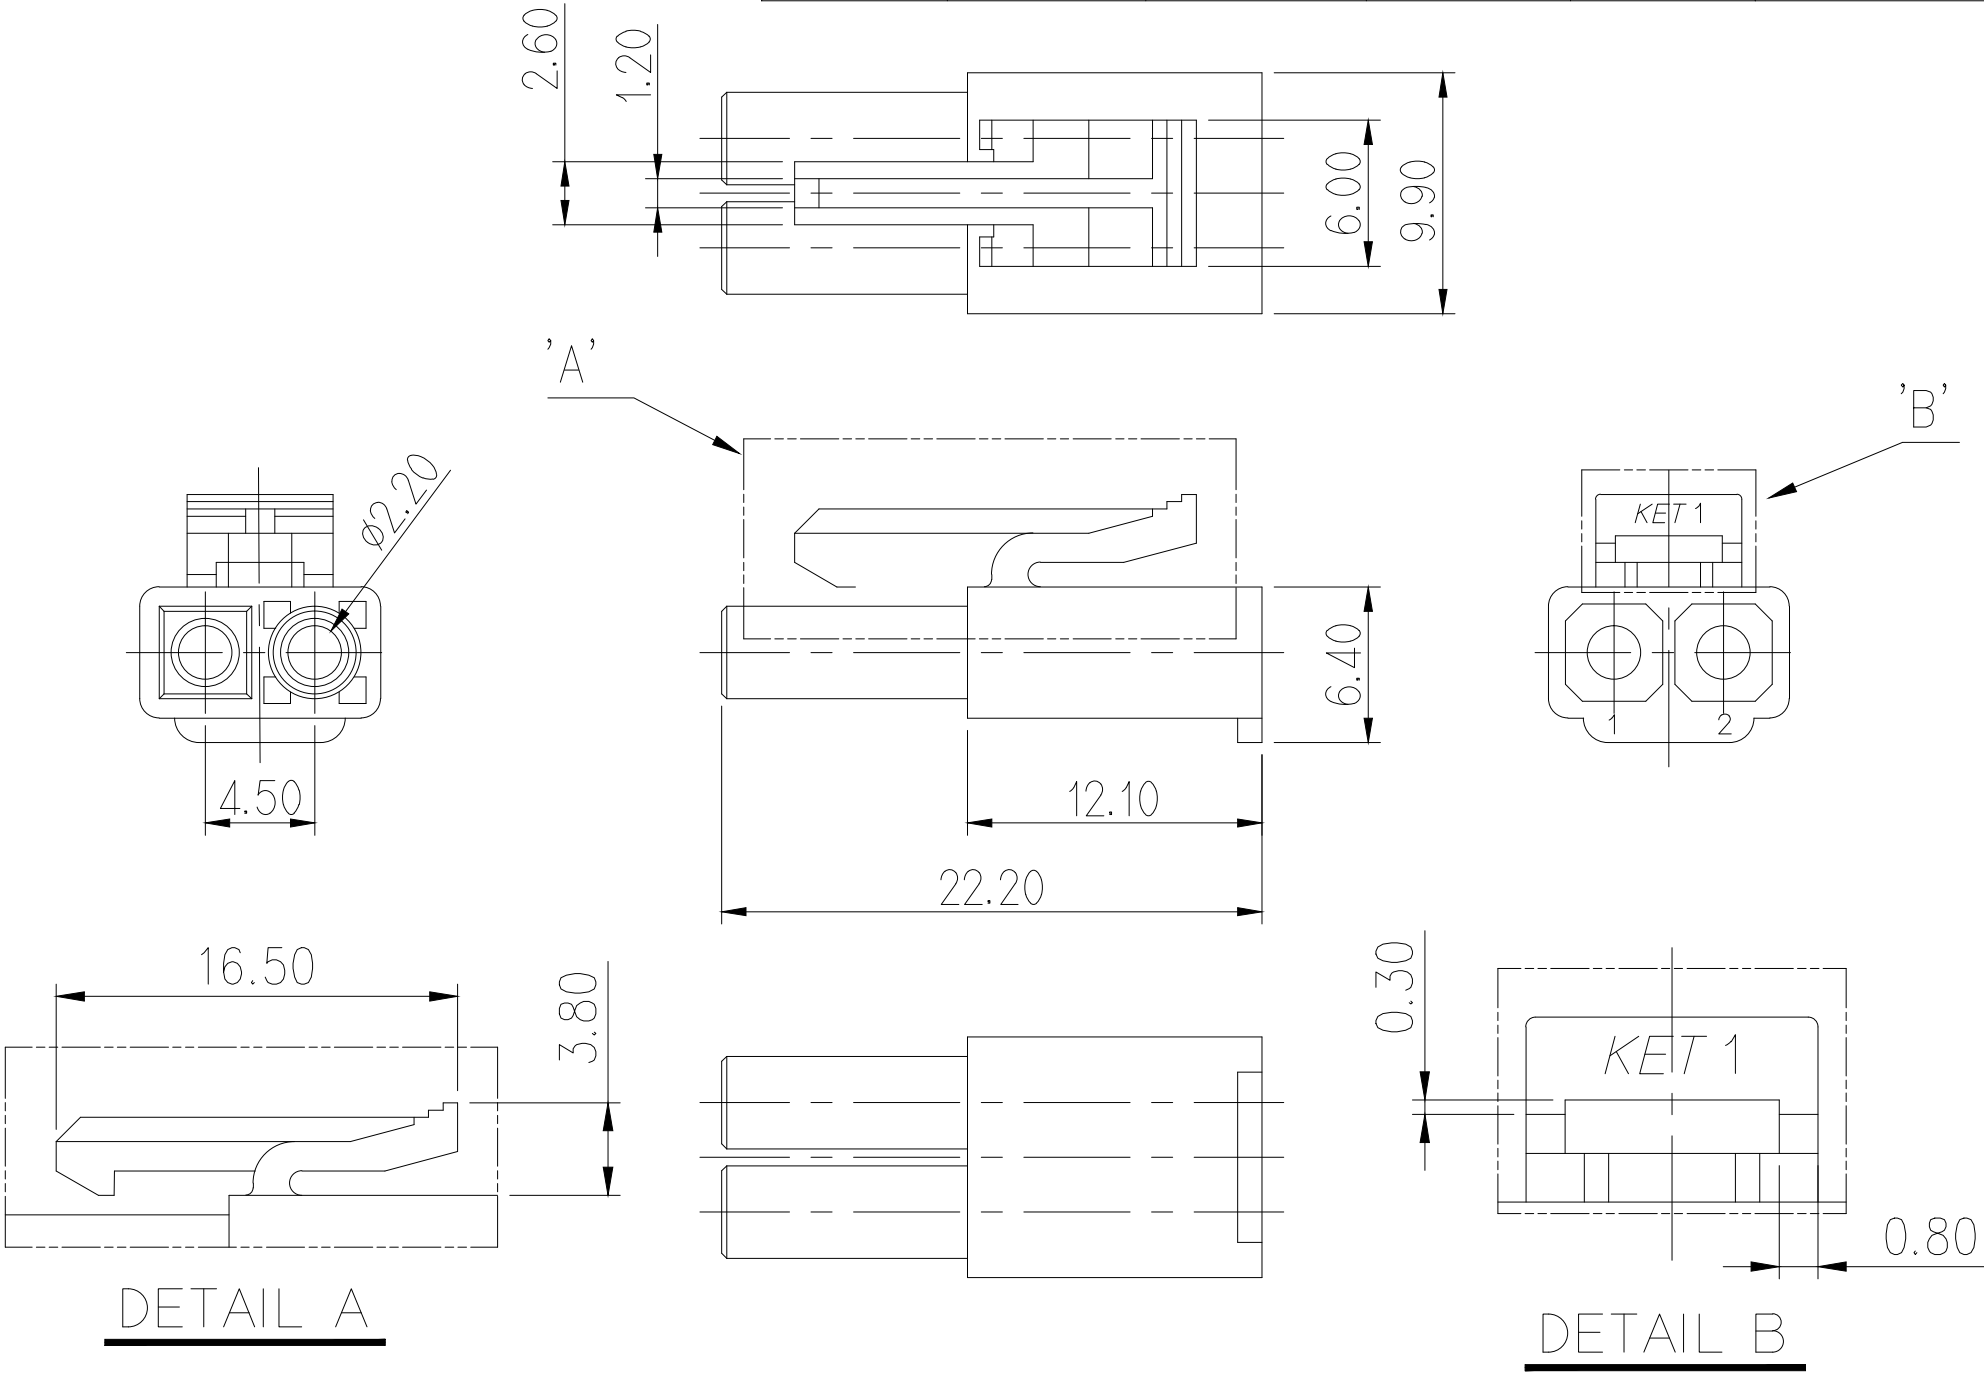

주 기

- 1.기능상 유해한 BURR, WELDLINE 없을 것
- 2.지시하지 않은 모든 R은 0.3R.
- 3.적용 HS'G : MG620023T-02, MG620040T-02
적용 FEMALE TERMINAL: ST730291-3, 730292-3
- 4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서
지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. MUST BE FREE OF BURR, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
2. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
3. APPLICABLE HS'G : MG620023T-02, MG620040T-02
APPLICABLE FEMALE TERMINAL : ST730291-3, 730292-3
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY,
CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL
NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION
PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

PART NO. *표시는 색상 표기임.


NO.	COLOR
* 0	NATURAL
1	RED
2	BLUE
3	YELLOW
4	GRAY
5	BLACK
6	GREEN

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK

					MATERIAL PET+PC(GWIT)		 KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH SEE TABLE		
					WIRE RANGE		
					INSULATION		
LTR	REVISION RECORD	DR. CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED SEE TABLE	SCALE 2/1	PART NO. MG610024T-∗02
DR. LYS '17.11.01		CHK. PSH '17.11.01			PART NAME ø1.3 PLUG 2P HOUSING		
CHK. KSH '17.11.01		APP. BUC '17.11.01					