

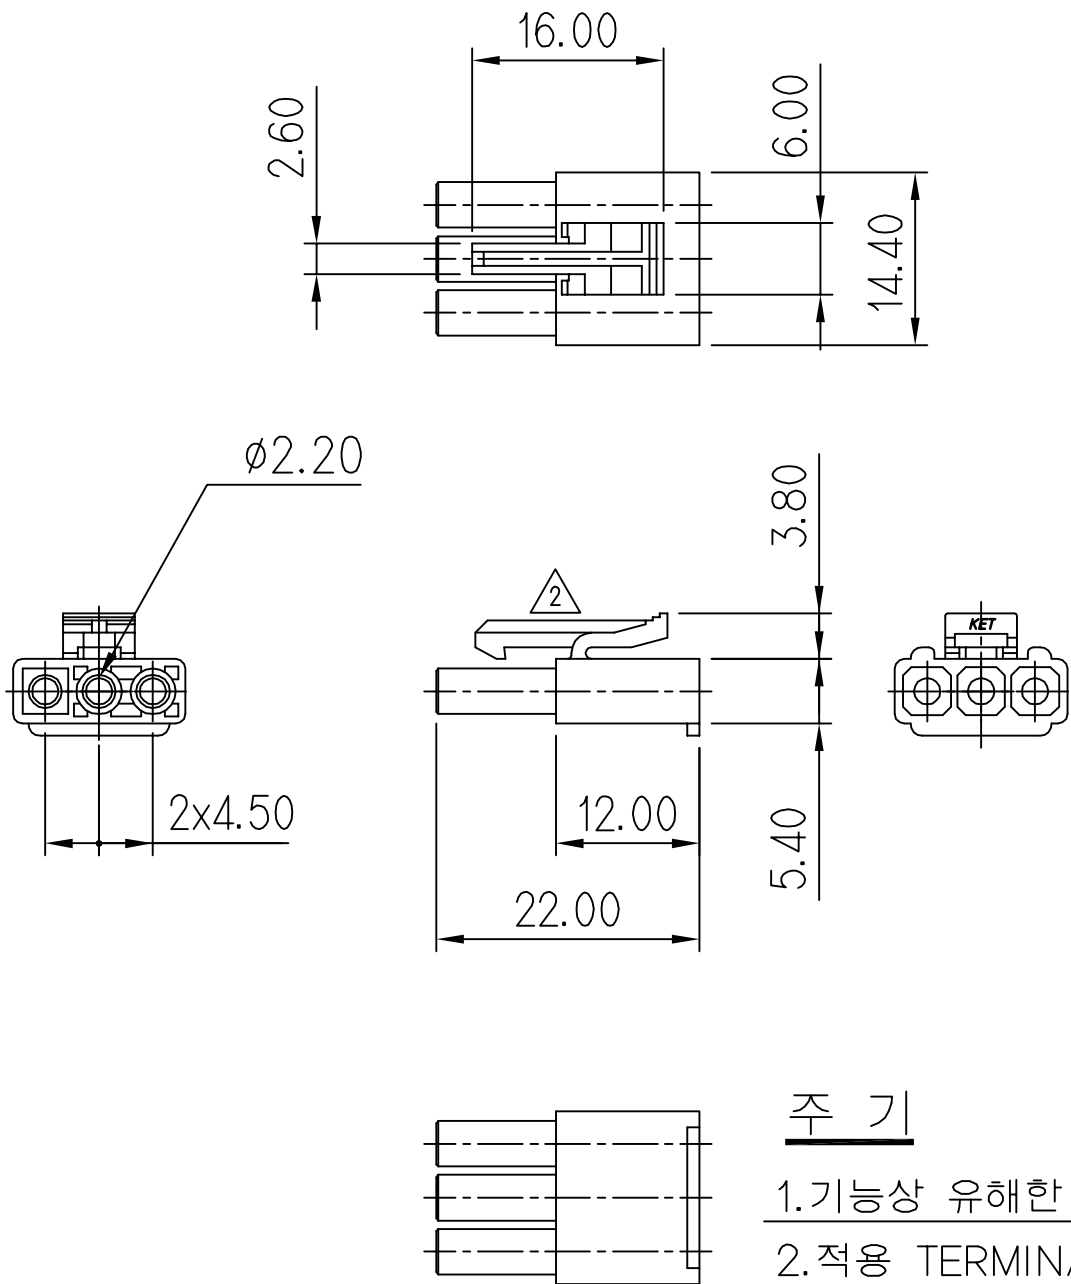
PART NO.

MG610026, 610026T

CUSTOMER DRAWING

(DIMENSIONS IN MM)

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	



△3

NO	P/NO	MATERIAL
1	MG610026	NYLON
2	MG610026T	PBT (V0급)








주 기

- 기능상 유해한 FLASH, SINK, WELDLINE 등이 없을것.
- 적용 TERMINAL: ST730291-3, ST730292-3
- 적용 HOUSING: MG623377, MG620025, MG620025T
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- MUST BE FREE OF FLASH, SINK, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST730291-3, ST730292-3
- APPLICABLE HOUSING : MG623377, MG620025, MG620025T
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

ISSUE MARK

					MATERIAL △3 SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.		
△4	설계사양변경(S110128)의거 도면 재작성			'11.04.28	FINISH NATURAL				
△3	S050150근거 수정			'05.07.01	WIRE RANGE				
△2	LOCK부 변경(제품개선)			'86.10.13	INSULATION				
△1	명칭 변경(전ø1.3 REC. 3P HSG)			'85.11.29			TYPE		
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED SEE TABLE	SCALE 1/1	PART NO. MG610026 MG610026T
DR.  85 9/15		CHK.				PART NAME			
CHK.  S. w 		APP. 				△1 ø1.3 PLUG HOUSING 3P			