


GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기


- 1.기능상 유해한 FLASH, SINK,WELDLINE 등이 없을것.
- 2.적용 TERMINAL: ST730291-3, ST730292-3
- 3.적용 HOUSING:MG620031,620201
- 4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서
지정한 최대 허용 농도를 초과해서는 안된다.

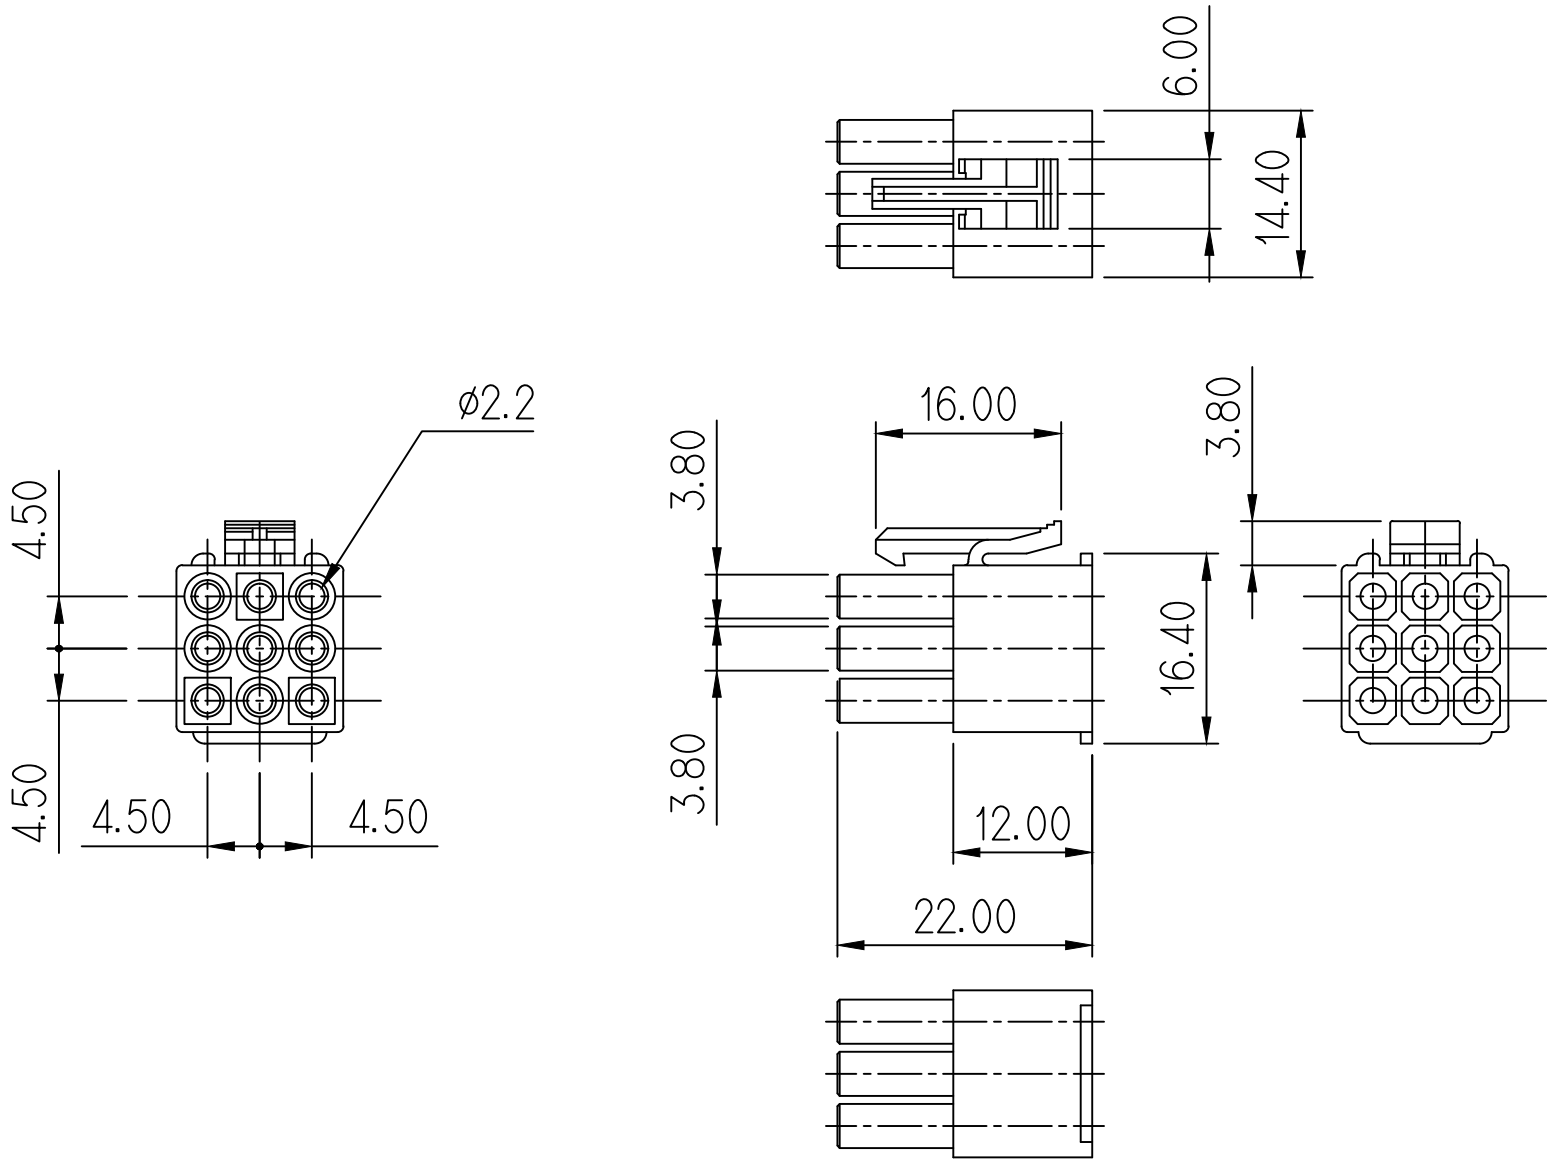

NOTE

1. MUST BE FREE OF FLASH, SINK,WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST730291-3, ST730292-3
3. APPLICABLE HOUSING : MG620031,620201
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY,
CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL
NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION
PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

ISSUE MARK

					MATERIAL	NYLON	 KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH	NATURAL	
3	설계사양변경(S110128)근거 도면 재작성			'11.04.28	WIRE RANGE		CLASS
2	LOCK부 변경 (제품개선)			'86.10.13	INSULATION		TYPE
1	명칭 변경(전ø1.3 REC 6P HSG)			'85.11.28	TOLERANCE EXCEPT AS NOTED	SEE TABLE	PART NO.
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	SCALE 1/1	MG610032
DR.	80 1/13	CHK.			PART NAME		
CHK.	J. W. K	APP.					

△ ø1.3 PLUG HOUSING 9P