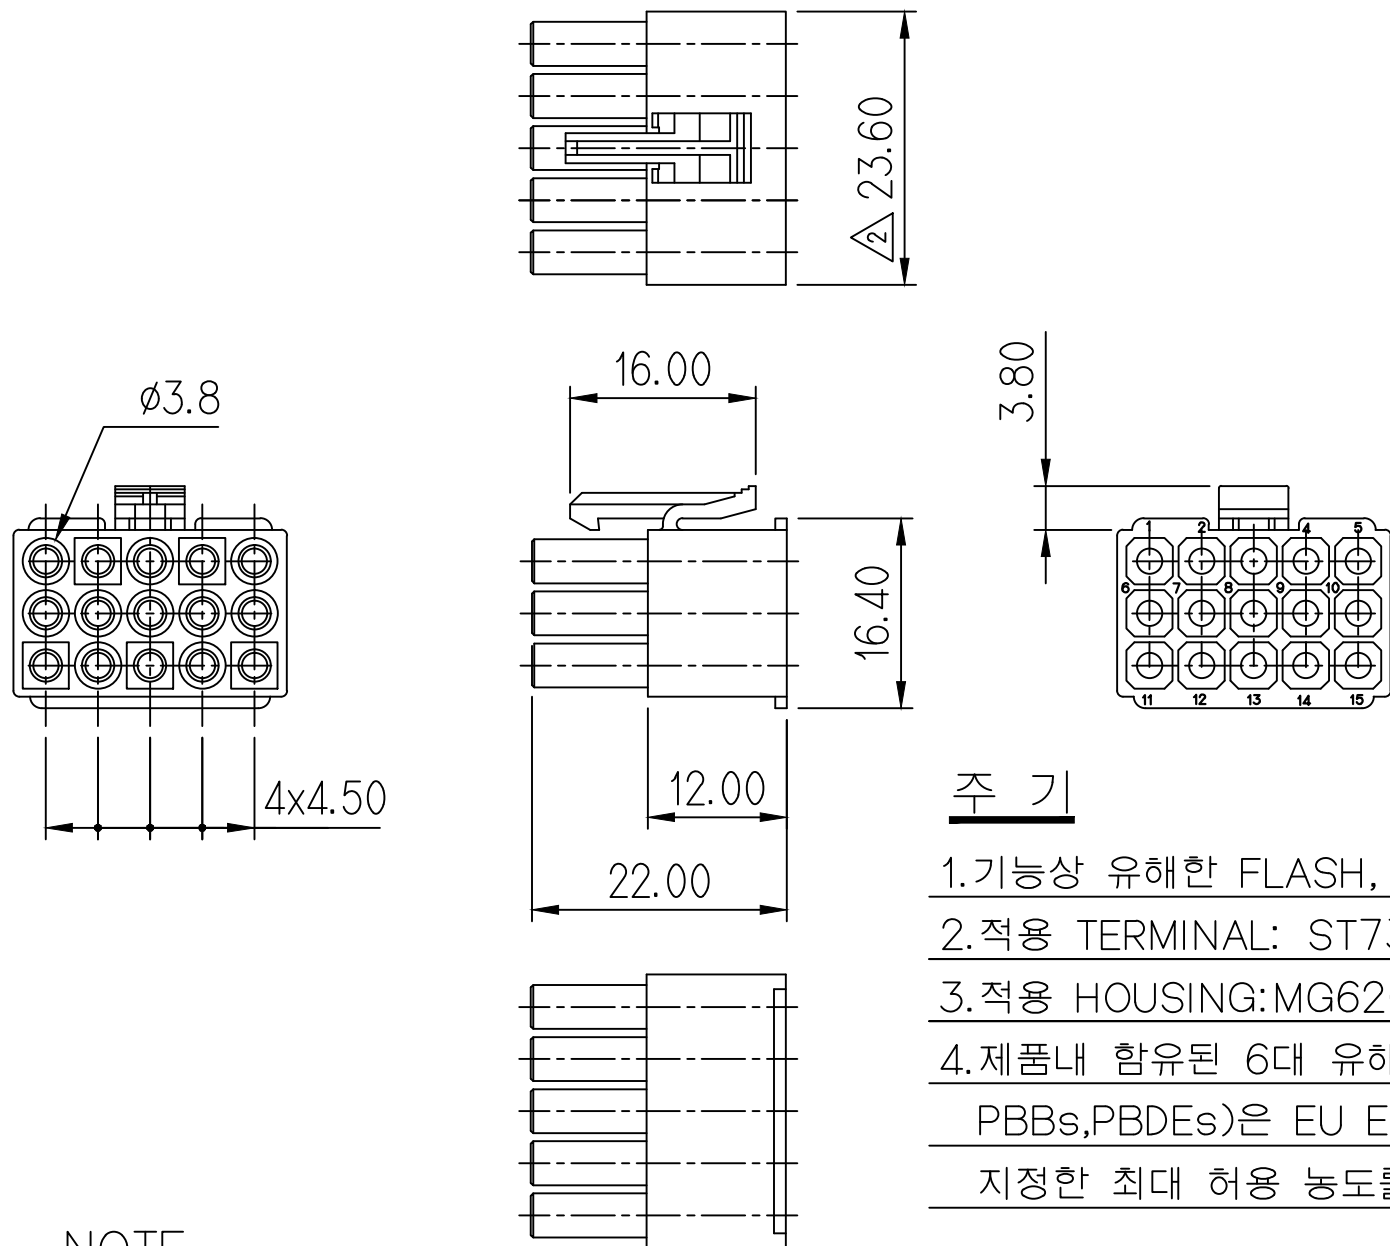


MG610036

CUSTOMER DRAWING

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	





NOTE

1. MUST BE FREE OF FLASH, SINK, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST730291-3, 730292-3
3. APPLICABLE HOUSING : MG620035
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 1.기능상 유해한 FLASH, SINK,WELDLINE 등이 없을것.
- 2.적용 TERMINAL: ST730291-3, 730292-3
- 3.적용 HOUSING:MG620035
- 4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

ISSUE MARK

					MATERIAL	NYLON	 KOREA ELECTRIC TERMINAL CO., LTD.	
④	설계사양변경(S110128)근거 도면 재작성			'11.04.28	FINISH	NATURAL		
③	LOCK부 변경 (제품 개선)			'86.10.13	WIRE RANGE	CLASS		
②	치수변경 (현품관리)			'86.02.13	INSULATION	TYPE		
①	명칭 변경(전ø1.3 REC 15P HSG)			'85.11.29				
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.
DR.	 85 9/11	CHK.				SEE TABLE	1/1	MG610036
CHK.		APP.				PART NAME		
						① ø1.3 PLUG HOUSING 15P		