




UNIT : DIMENSIONS IN MM






도면번호 NUMBER

89 610045

△ M6612026



A' 상세도

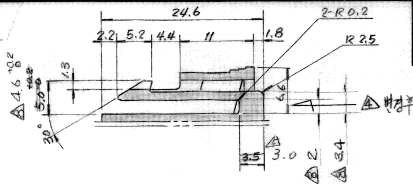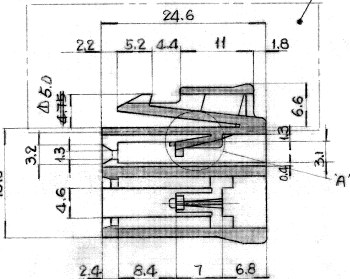

NO	MAT'L	COLOR
0		NATURAL
1		RED
2		BLUE
3		YELLOW
4	NYLON (M6610045)	GRAY
5	PBT	BLACK
6	(M6612026)	WHITE GREEN
7		BROWN
8		GREEN

CUSTOMER DRAWING

△ 홀에 NO. 8인 △ 리우면경 (리우면경) △ 리우면경 (리우면경) △ 리우면경 (리우면경) △ 리우면경 (리우면경) △ 리우면경 (리우면경)		89.5.28 89.6.10 89.6.10 89.6.10 89.6.10 89.6.10	48 (MATERIAL) 48 (FINISH) 48 (WIRE RANGE) 48 (INSULATION DIA) 48 (TOLERANCE) 48 (SCALE) 48 (NAME)	SEE TABLE SEE TABLE SEE TABLE SEE TABLE SEE TABLE SEE TABLE	KET KOREA ELECTRIC TERMINAL CO., LTD. # (CLASS) # (TYPE)
△ 리우면경 (리우면경) △ 리우면경 (리우면경) △ 리우면경 (리우면경) △ 리우면경 (리우면경) △ 리우면경 (리우면경) △ 리우면경 (리우면경)		89.5.28 89.6.10 89.6.10 89.6.10 89.6.10 89.6.10	48 (MATERIAL) 48 (FINISH) 48 (WIRE RANGE) 48 (INSULATION DIA) 48 (TOLERANCE) 48 (SCALE) 48 (NAME)	SEE TABLE SEE TABLE SEE TABLE SEE TABLE SEE TABLE SEE TABLE	KET KOREA ELECTRIC TERMINAL CO., LTD. # (CLASS) # (TYPE)
△ 리우면경 (리우면경) △ 리우면경 (리우면경) △ 리우면경 (리우면경) △ 리우면경 (리우면경) △ 리우면경 (리우면경) △ 리우면경 (리우면경)		89.5.28 89.6.10 89.6.10 89.6.10 89.6.10 89.6.10	48 (MATERIAL) 48 (FINISH) 48 (WIRE RANGE) 48 (INSULATION DIA) 48 (TOLERANCE) 48 (SCALE) 48 (NAME)	SEE TABLE SEE TABLE SEE TABLE SEE TABLE SEE TABLE SEE TABLE	KET KOREA ELECTRIC TERMINAL CO., LTD. # (CLASS) # (TYPE)

한국전자공업주식회사