





GENERAL TOLERANCE (HOUSING)

USED ON

10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

1. 기능상 유해한 BURR, WELDLINE 없을 것
2. 적용 TERMINAL: ST730335-3, 730910-3
적용 HOUSING : MG620129
3. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

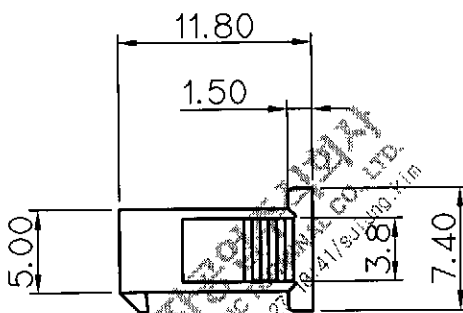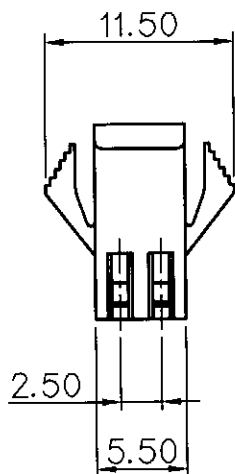

NO.	MATERIAL	COLOR
0	NYLON	NATURAL
1		RED
2		BLUE
3		YELLOW
5		BLACK

NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST730335-3, 730910-3
APPLICABLE HOUSING : MG620129
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

ISSUE MARK

				MATERIAL		NYLON		KOREA ELECTRIC TERMINAL CO., LTD.	
				FINISH		SEE TABLE			
				WIRE RANGE		CLASS			
				INSULATION		TYPE SMP - 02			
△ 설계사양변경 S110128 근거 수정 DR. 88.03.27 CHK. 88.03.31 APP.				KSJ 11.04.27 DR.		TOLERANCE EXCEPT AS NOTED SEE TABLE		SCALE 2/1 PART NO. MG610128	
DR. 88.03.27 CHK. 88.03.31 APP.				PART NAME 1006P - 02					