


(DIMENSIONS IN MM)

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

1. 기능상 유해한 BURR, WELDLINE 없을 것
2. 적용 TERMINAL: ST730335-3, 730910-3
적용 HOUSING : MG620129
3. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서
지정된 최대 허용 농도를 초과해서는 안된다.

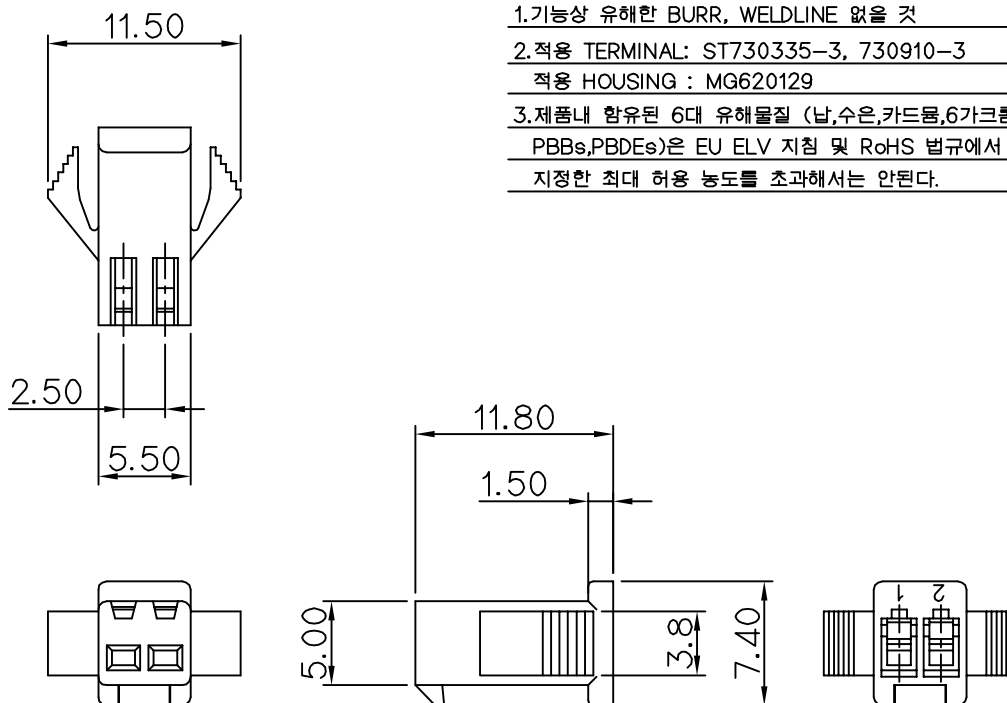

NO.	MATERIAL	COLOR
0	NYLON	NATURAL
1		RED
2		BLUE
3		YELLOW
5		BLACK

NOTE

1. MUST BE FREE OF BURR, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST730335-3, 730910-3
APPLICABLE HOUSING : MG620129
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY,
CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL
NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION
PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

ISSUE MARK

						MATERIAL		NYLON	 KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
						FINISH		SEE TABLE	
						WIRE RANGE		CLASS	
						INSULATION		TYPE	
	설계사양변경 S110128 근거 수정		KSJ		'11.04.27				
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.
							SEE TABLE	2/1	MG610128
DR.	 88.03.27		CHK.	 88.03.31		PART NAME			
CHK.	S. W. Kim		APP.			1006P - 02			