

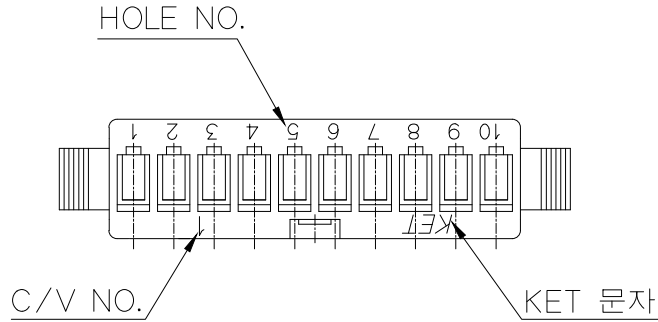
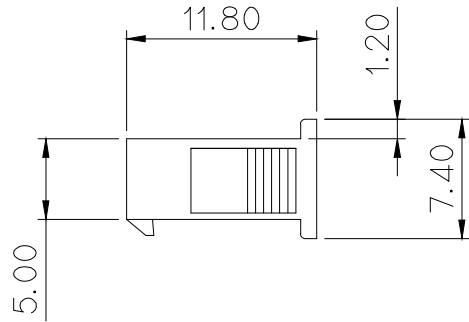


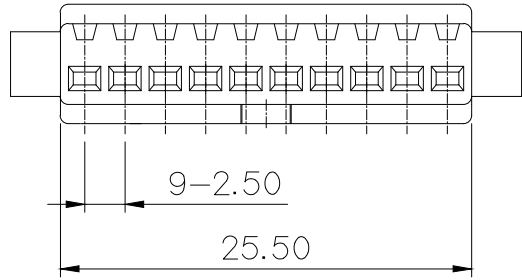

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

PART NO. *표시는 색상 표기임.

NO.	COLOR
* 0	NATURAL
1	RED
2	BLUE
3	YELLOW
5	BLACK
6	GREEN

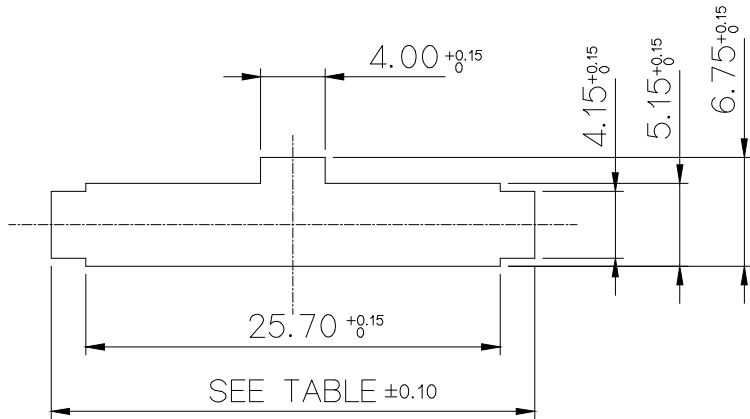

PANEL HOLE DIM.

No.	MATERIAL	PANEL THICKNESS(mm)		
		0.5-0.9	1.0-1.2	1.6-2.0
1	PLASTIC	29.6	29.8	30.0
2	STEEL	30.1	30.3	30.5

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE HOUSING : MG620145T-*10
APPLICABLE TERMINAL : ST730335-3
- 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을 것.
- 적용 HOUSING : MG620145T-*10
적용 TERMINAL : ST730335-3
- 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Product Development Team

ISSUE MARK

					MATERIAL PET+PC(GWIT)		 KOREA ELECTRIC TERMINAL CO., LTD.		
					FINISH SEE TABLE				
					WIRE RANGE				
					INSULATION				
LTR	REVISION RECORD		DR. CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO.	MG610144T-010
DR.	SMG '18.01.18		CHK.		PSH '18.01.18		PART NAME		
CHK.	KSH '18.01.18		APP.		BUC '18.01.18		1006 10F HOUSING		