
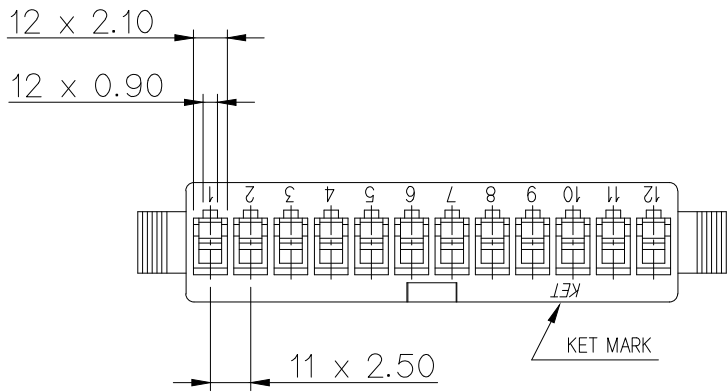
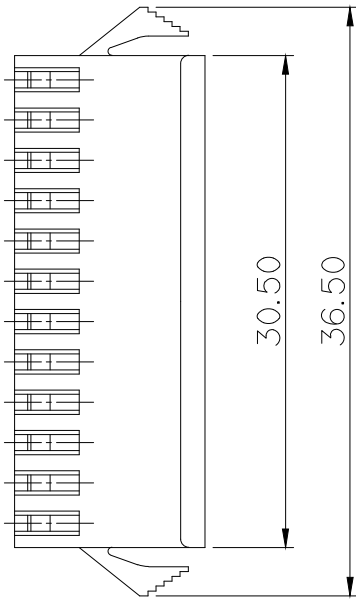


NO.	MATERIAL	COLOR
0	NYLON	NATURAL
1		RED
2		BLUE
3		YELLOW
5		BLACK

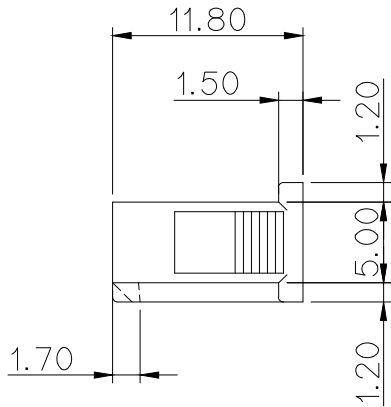

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

- 기능상 유해한 BURR, WELDLINE이 없을 것
- 적용 TERMINAL: ST730335-3, 730910-3
적용 HOUSING: MG620149
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST730335-3, 730910-3
APPLICABLE HOUSING : MG620149
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED

2017-08-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK

					MATERIAL	NYLON	KET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.	
					FINISH	SEE TABLE		
					WIRE RANGE		CLASS	
					INSULATION		TYPE SMP - 12V - NC	
					LTR	REVISION RECORD	DR.	DATE
					DR.	39.09.06	CHK.	89.09.19
					CHK.	5. w k e r	APP.	
					TOLERANCE EXCEPT AS NOTED		SCALE	PART NAME
					SEE TABLE		2/1	1mm PLUG HSG 12P