

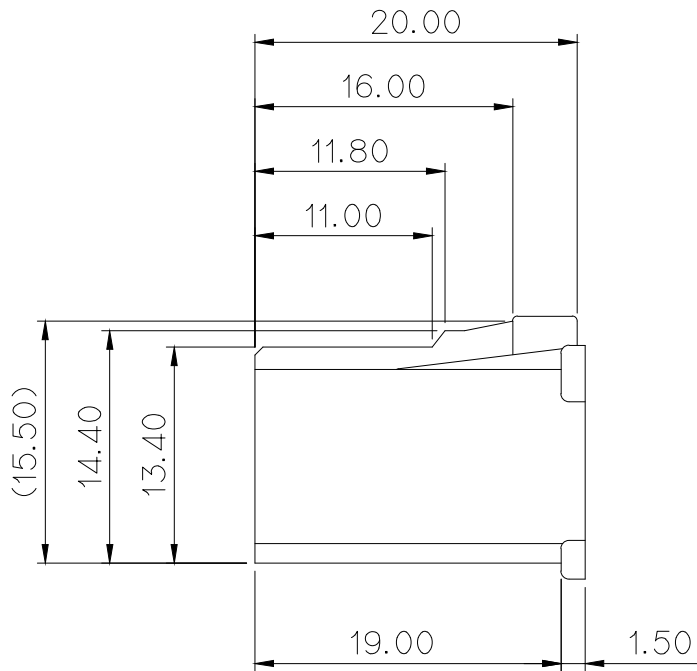
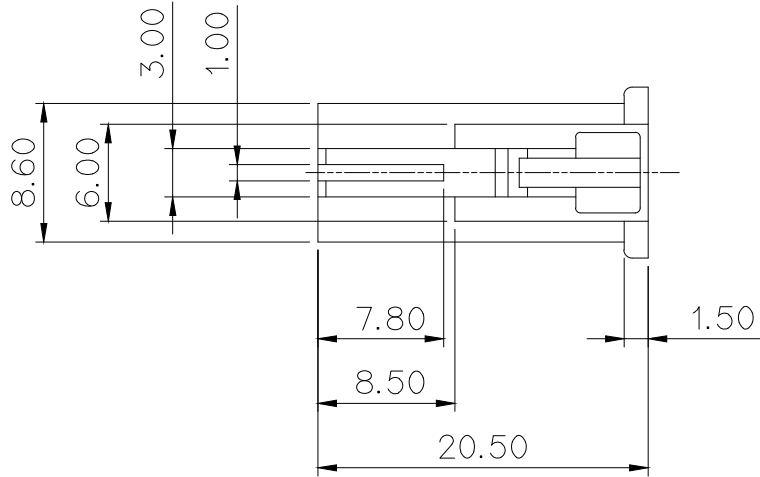


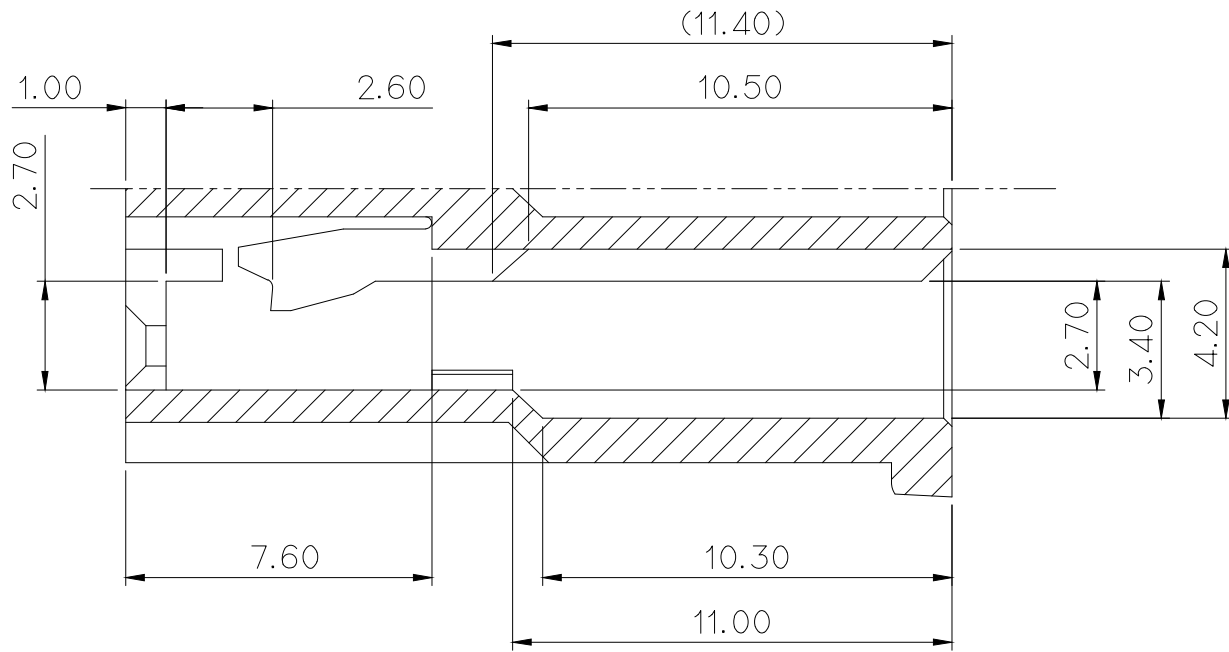

△		
NO.	MATERIAL	COLOR
* 0	NYLON	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

주 기

- 기능상 유해한 BURR및 변형등이 없을것.
- 적용 HOUSING : MG620160
- 적용 TERMINAL : ST730365-3, ST730366-3, ST730431-3
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

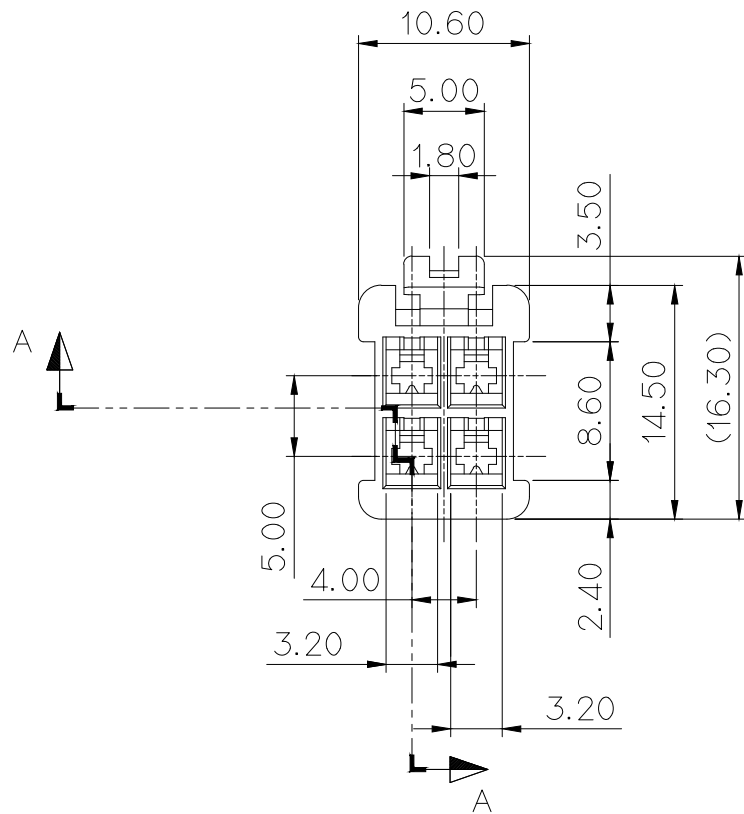

SECTION A-A (5/1)

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE CONNECTOR: MG620160
- APPLICABLE TERMINAL: ST730365-3, ST730366-3, ST730431-3
- 6 HAZARDOUS SUBSTANCES IN PARTS(LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBDEs)SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE.

APPROVED

2020-12-11

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

						MATERIAL		SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH		SEE TABLE	
						WIRE RANGE		CLASS	
						INSULATION		TYPE	
△	ECO-2003-431 근거 도면 재작성	SDI	KSC	CJH	'20.03.25				
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED ±0.3		SCALE 2/1	PART NO. MG610159
DR.		CHK.				PART NAME			
CHK. JWK		APP. WATANABE				2.3mm PLUG HOUSING 4P			