

| GENERAL TOLERANCE (HOUSING) |       |       |       |        | USED ON |
|-----------------------------|-------|-------|-------|--------|---------|
| 10MAX                       | 20MAX | 45MAX | ANGLE | ECCENT |         |
| ±0.2                        | ±0.25 | ±0.3  | ±30'  | 0.1    |         |

PART NO.

MG610222

- 주 기
- 1.기능상 유해한 FLASH, SINK,WELDLINE 등이 없을것.






2.적용 TERMINAL: ST730459-3, 730460-3,  
ST730461-3, 730462-3

3.적용 HOUSING:MG620223

4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬,  
PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서  
지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. MUST BE FREE OF FLASH, SINK,WELDLINE  
AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST730459-3, 730460-3,  
ST730461-3, 730462-3
3. APPLICABLE HOUSING : MG620223
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY,  
CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL  
NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION  
PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

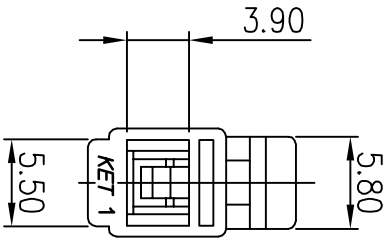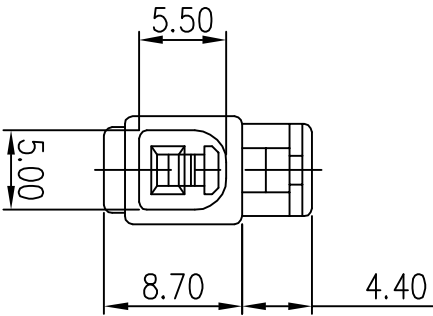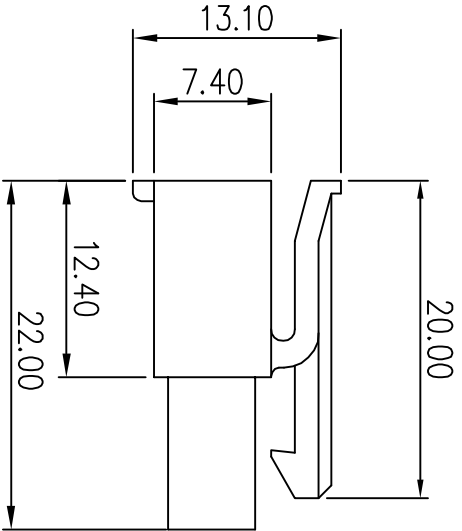

| NO. | COLOR   |
|-----|---------|
| 0   | NATURAL |
| 1   | RED     |
| 2   | BLUE    |
| 3   | YELLOW  |
| 5   | BLACK   |
| 8   | GREEN   |

ISSUE MARK

MATERIAL

PBT

FINISH

SEE TABLE

KOREA ELECTRIC  
ENGINEERED

TERMINAL CO., LTD.

| WIRE RANGE | CLASS |
|------------|-------|
|            |       |

| INSULATION | TYPE |
|------------|------|
|            |      |

| LTR | REVISION RECORD | DR.      | CHK. | APP. | DATE | TOLERANCE<br>AS NOTED | SCALE | PART NO. |
|-----|-----------------|----------|------|------|------|-----------------------|-------|----------|
| DR. | HAN             | 91.04.02 | CHK. |      |      | SEE TABLE             | 2/1   | MG610222 |

| CHK. | APP.      | PART NAME        |
|------|-----------|------------------|
| CHK. | S. W. Lee | 1806 HSG PLUG 1P |