
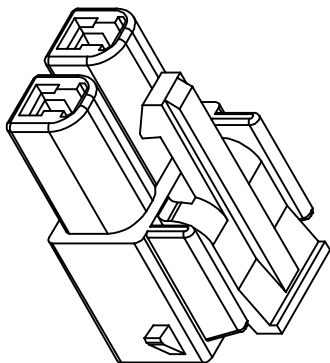
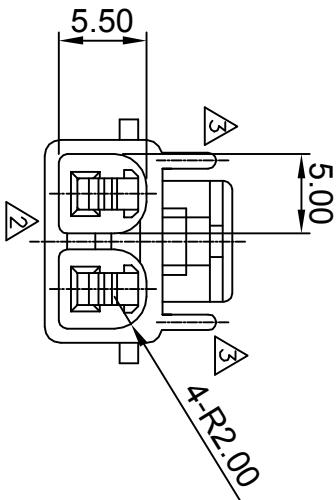
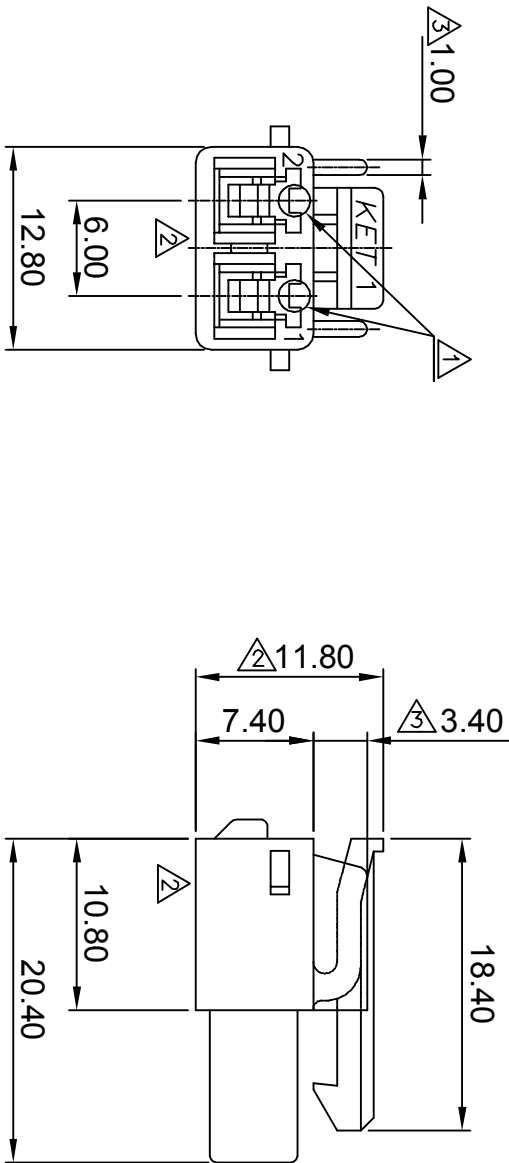


GENERAL TOLERANCE (HOUSING)				USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT
±0.2	±0.25	±0.3	±30'	0.1

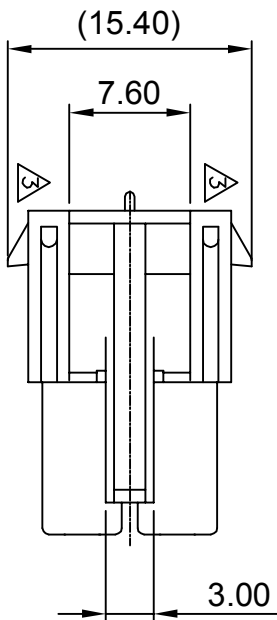

ISOMETRIC VIEW

NO.	Part No	MATERIAL
0	MG610224S	PBT(V0)
1	MG610224ST	PET+PC(G.W.I.T)

5	4	NO.	MATERIAL	COLOR
*		0	PBT(V0)	NATURAL
		1	or	RED
*		2	PET+PC	BLUE
*		5	(G.W.I.T)	BLACK

NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.

2. APPLICABLE TERMINAL : ST731131-3,1228-3
3. 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & ROHS REGULATION

△5	ECO-1405-123근가 도면 재작성	LCM	KSH	BUC	'14.05.21	MATERIAL	SEE TABLE	KIET KOREA ELECTRIC ENGINEERED	TERMINAL CO., LTD.
△4	ECO-1401-161근가 도면 재작성	LCM	조기	조기	'14.01.20				
△3	ECO-110-045근가 도면 재작성	KSJ	조기	조기	'11.10.10				
△2	ECO-1107-175 근가 도면 재작성	PJM	조기	조기	'11.07.12				
△1	설계시공변경(S090067)의가 도면 재작성	PJM	조기	조기	'09.03.30				
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.	
DR.	P.J.M '08.10.30	CHK.	조기	조기	10/30	PART NAME	SEE TABLE	2/1	SEE TABLE
CHK.		APP.	조기	조기	10/30			1806	2F HS'G

ISSUE MARK

주 기

1. 기능상 유해한 BURR 및 WELDLINE등이 없을것.

2. 적용 테미널 : ST731131-3, 1228-3

3. 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬
PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한
최대 허용농도를 초과해서는 안 된다.

ISSUE MARK

KJET KOREA ELECTRIC
ENGINEERED TERMINAL CO., LTD.

CLASS 1806

INSULATION

2/1

PART NO.

1806 2F HS'G