
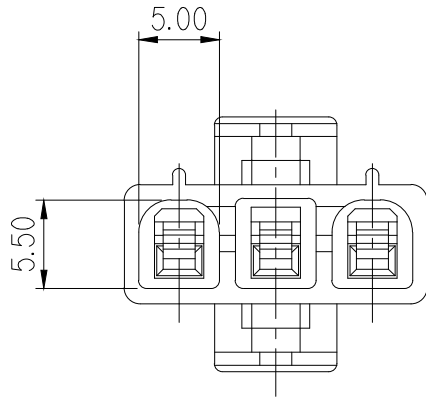
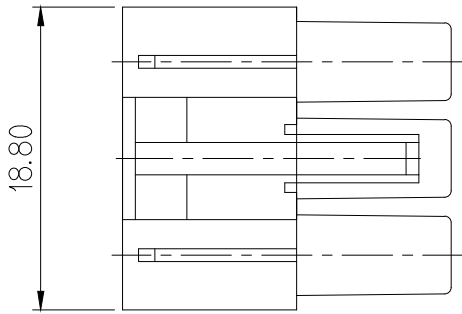
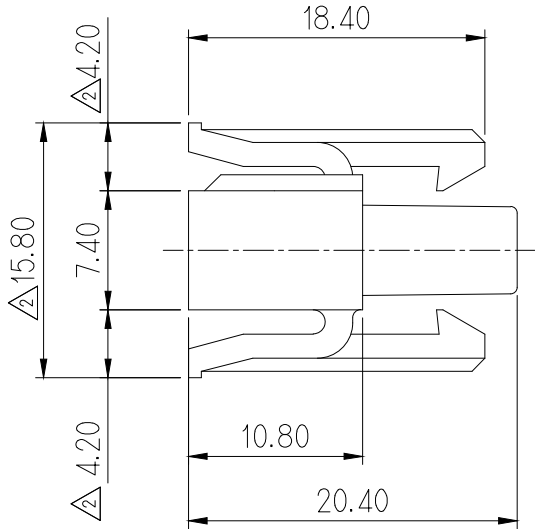


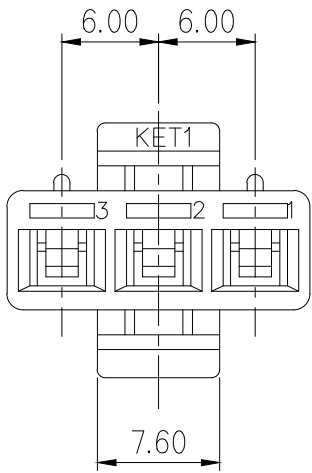

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

1 4

NO	P/NO	MATERIAL
1	MG610226	PBT(V0)
2	MG610226G	PBT+PC(V0)

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
5	BLACK
8	GREEN

NOTE

- MUST BE FREE OF FLASH, SINK,WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST730459-3, 730460-3, ST730461-3, 730462-3
- APPLICABLE HOUSING :MG620227,0427,0427G
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 기능상 유해한 FLASH, SINK,WELDLINE 등이 없을것.
- 적용 TERMINAL: ST730459-3, 730460-3, ST730461-3, 730462-3
- 적용 HOUSING:MG620227,0427,0427G
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

APPROVED

2017-08-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK

						MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.	
④	ECO-1409-113의거 도면 재작성	LCM	KSH	BUC	'14.09.19	FINISH SEE TABLE			
③	설계사양변경(S110128)근거 도면 재작성	LSY	SH	SH	'11.04.28	WIRE RANGE		CLASS	
②	S040171근거 치수변경(3곳)	LSY	SH	SH	'04.10.28	INSULATION		TYPE	
①	S040114근거 P/NO 추가	SH	SH		'04.08.25				
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG610226/MG610226G
DR. 根 '90.2.22		CHK. SH HAN 90.05.31				PART NAME			
CHK. S. w		APP. SH				1806 3F HOUSING			