
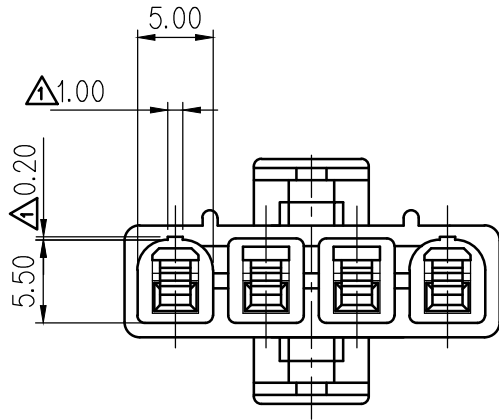
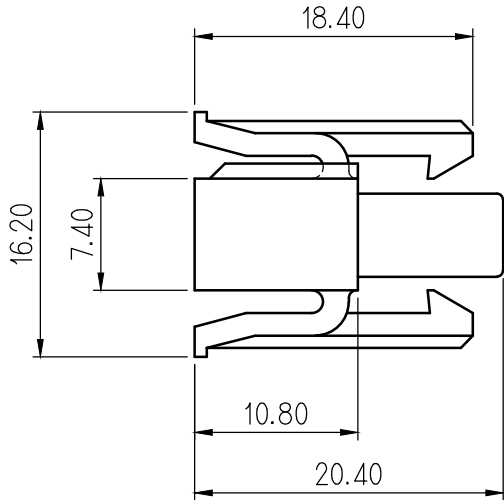
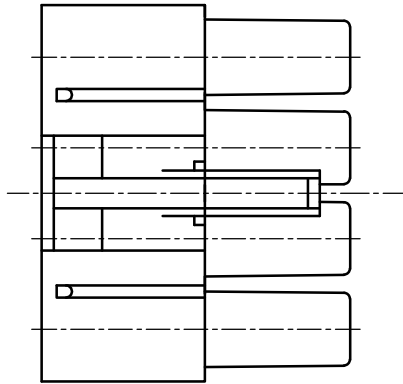


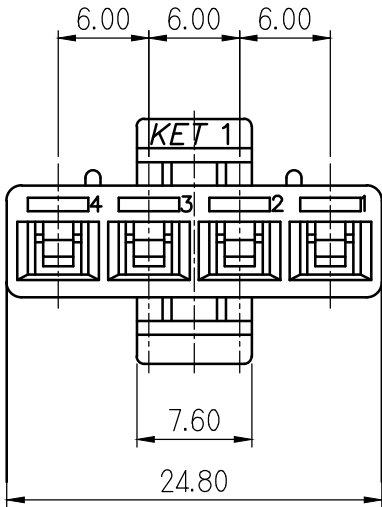

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NOTE

1. MUST BE FREE OF FLASH, SINK,WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST730459-3, 730460-3,
ST730461-3, 730462-3
3. APPLICABLE HOUSING :MG620231,620428
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY,
CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL
NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION
PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 1.기능상 유해한 FLASH, SINK,WELDLINE 등이 없을것.
- 2.적용 TERMINAL: ST730459-3, 730460-3,
ST730461-3, 730462-3
- 3.적용 HOUSING:MG620231,620428
- 4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬,
PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서
지정한 최대 허용 농도를 초과해서는 안된다.

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
5	BLACK
8	GREEN

						MATERIAL PBT(V0)		 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH SEE TABLE			
						WIRE RANGE		CLASS	
						INSULATION		TYPE	
	설계사양변경(S110128)근거 도면 재작성					'11.04.28			
	S050241근거 수정		MIN		CBH	'05.10.14			
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG610230
DR.		根 '90.2.22	CHK.		SH HAN 90.05.31		PART NAME		
CHK.		S. w kw	APP.				1806 4F HOUSING(B)		

ISSUE MARK