
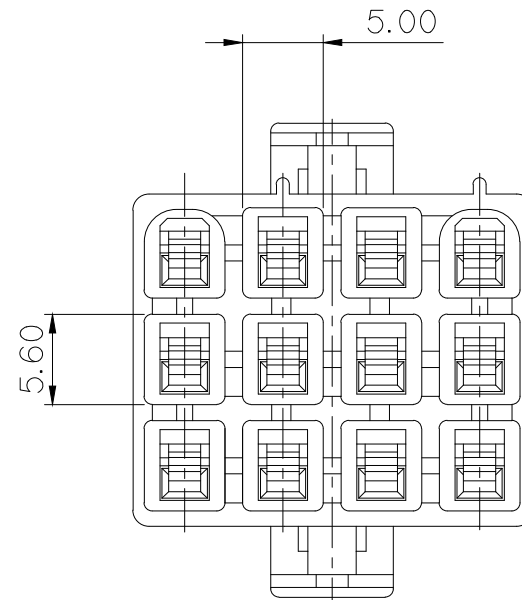
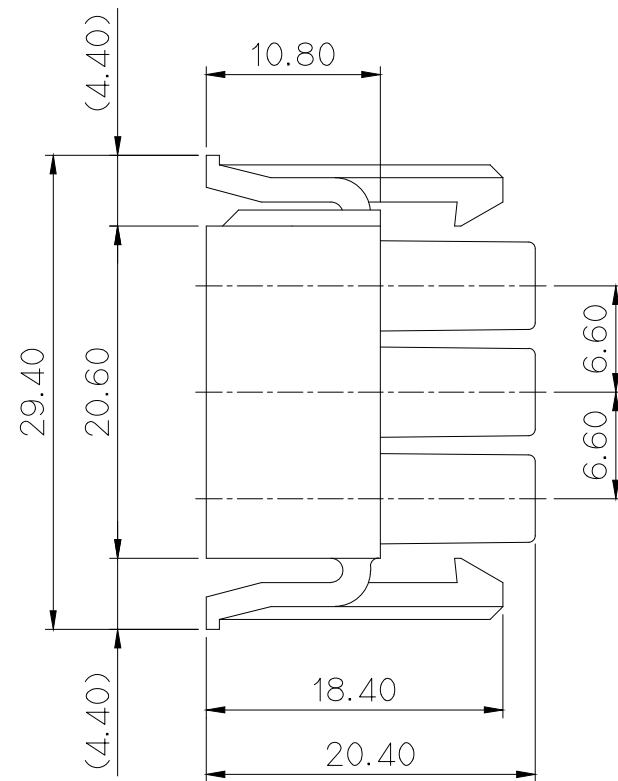


GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

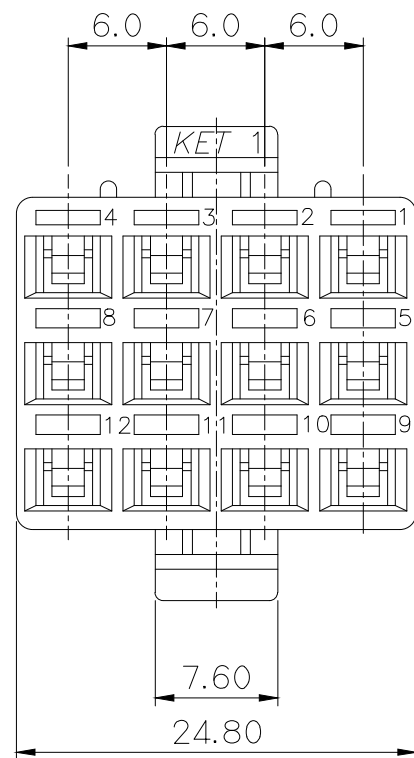

주 기

1. 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 2.적용 TERMINAL : ST730459,460,461,462-3
- 3.적용 HOUSING:MG620237, 620432
- 4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서
지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. MUST BE FREE OF FLASH, SINK
AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST730459,460,461,462-3
3. APPLICABLE HOUSING :MG620237, 620432
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY,
CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL
NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION
PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
5	BLACK
8	LIGHT GREEN

						MATERIAL	PBT	 KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH	SEE TABLE	
						WIRE RANGE		CLASS
①	설계사양변경(S110128)근거 도면 재작성	KSH	—	'11.04.28		INSULATION		TYPE
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG610236
DR.		CHK. SH HAN 90.05.31				PART NAME		
CHK. J. W. Lee		APP. [Signature]				1806 PLUG 12P HS'G		

APPROVED

2017-08-10

**KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Product
Development Team**

ISSUE MARK

IKET KOREA ELECTRIC
ENGINEERED TERMINAL CO., LTD.

CLASS

TYPE

PART NO. MG610236

1806 PLUG 12P HS'G