

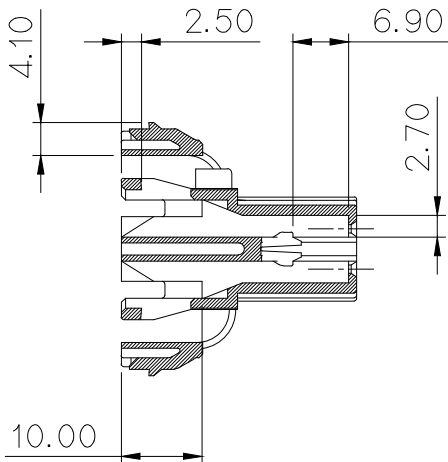
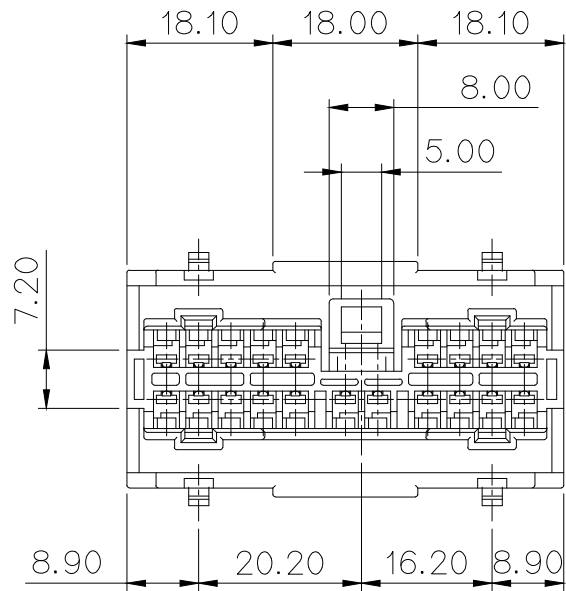
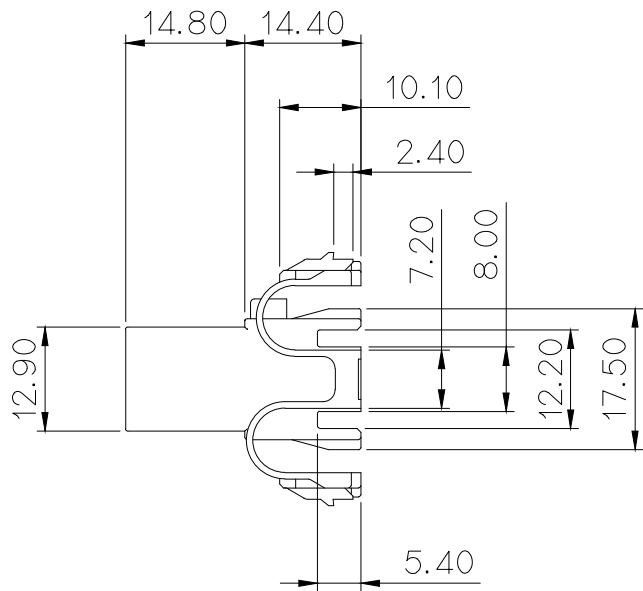
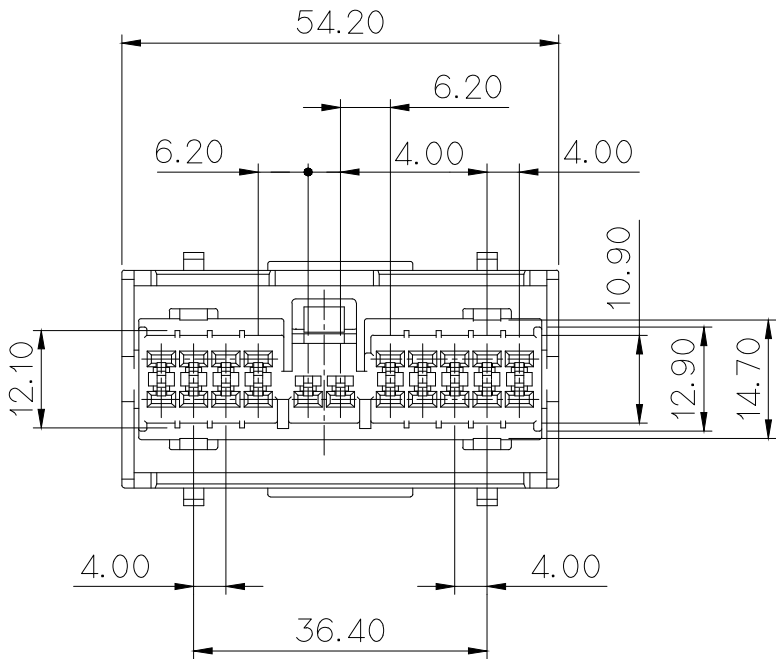


*

NO.	METERIAL	COLOR
0	P B T:	NATURAL
1		RED
2		BLUE
3		YELLOW
4		GRAY
5		BLACK
6		W / GREEN
7		BROWN
8		GREEN

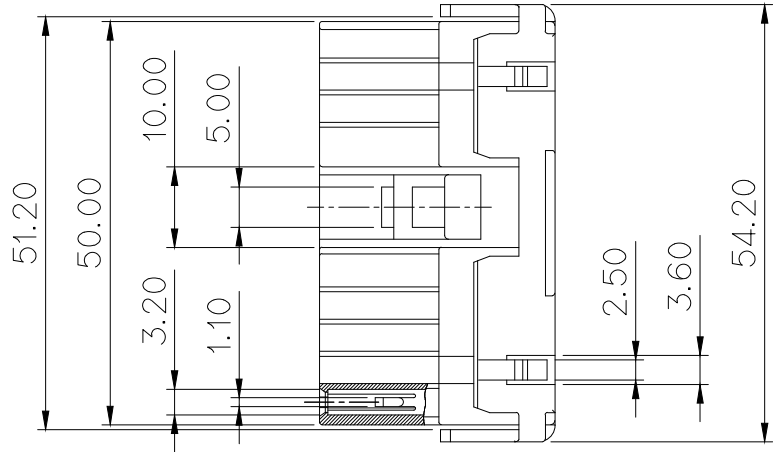

SECTION A-A

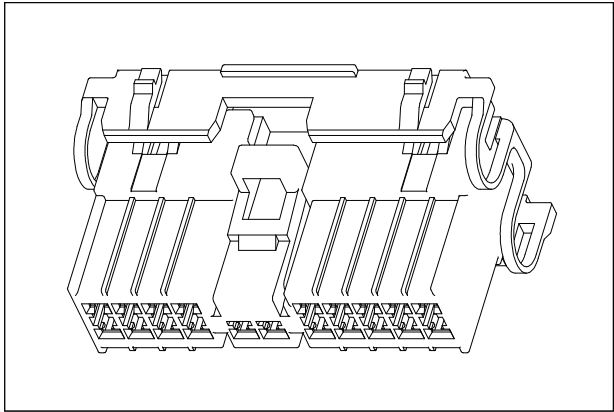

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

주 기

- 1.기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 2.적용 TERMINAL: ST730409, 730410
적용 HOUSING: MG640242
- 3.제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. MUST BE FREE OF BURR, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL :ST730409, 730410
APPLICABLE HOUSING :MG640242
- 3.6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MECURY, CADMIUM, HEXAVALENT CHROMIUM, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE.

APPROVED

2018-12-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

						MATERIAL		SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH		SEE TABLE	
						WIRE RANGE		CLASS	
						INSULATION		TYPE	
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG610240
DR.	OG 89.10.23		CHK.				PART NAME		
CHK.	JWK		APP.			MCCP 20P PLUG HOUSING			