

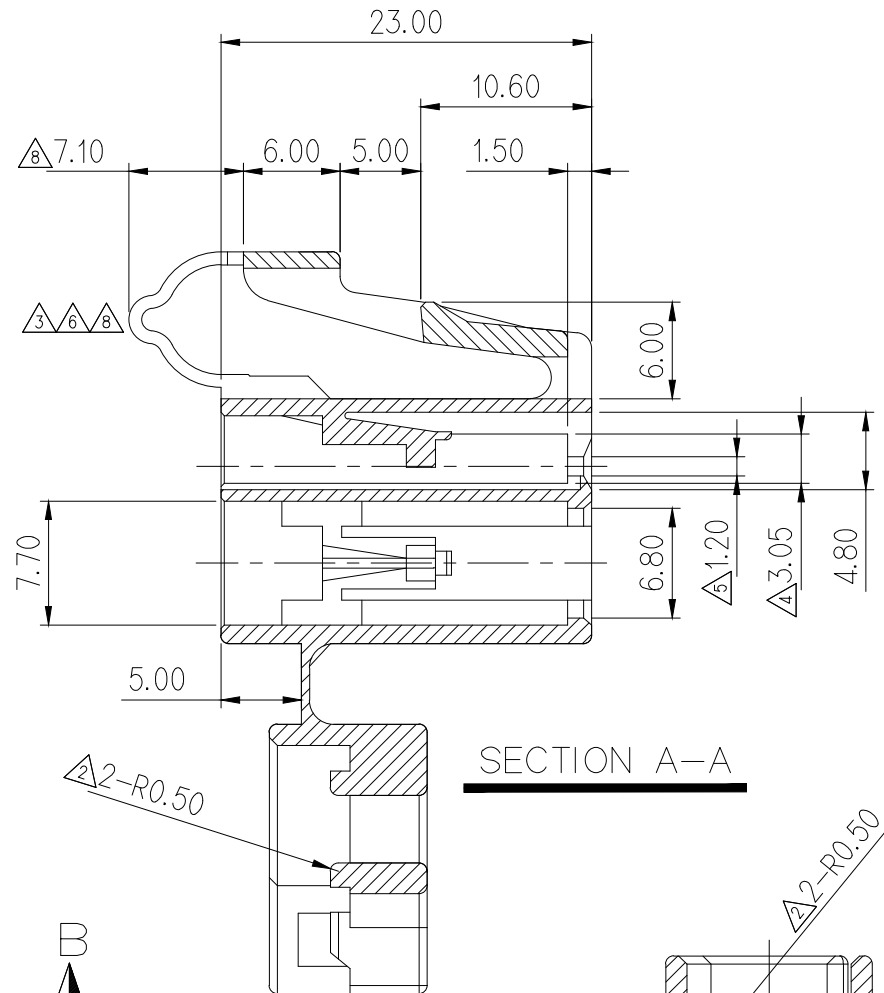
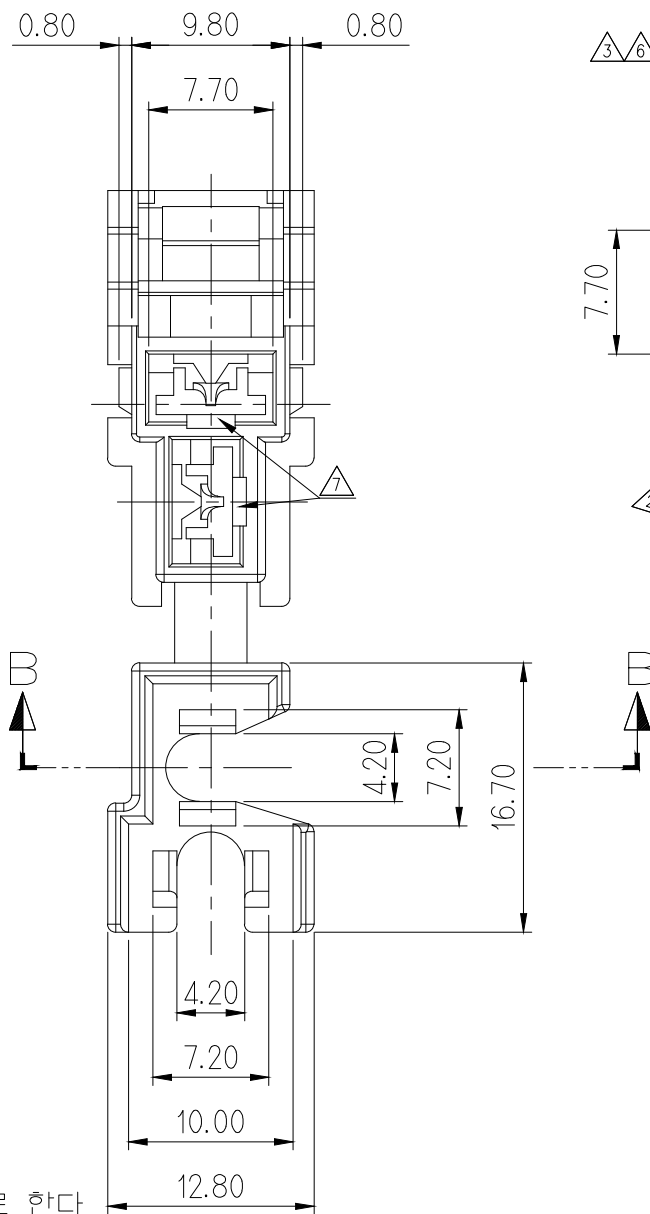
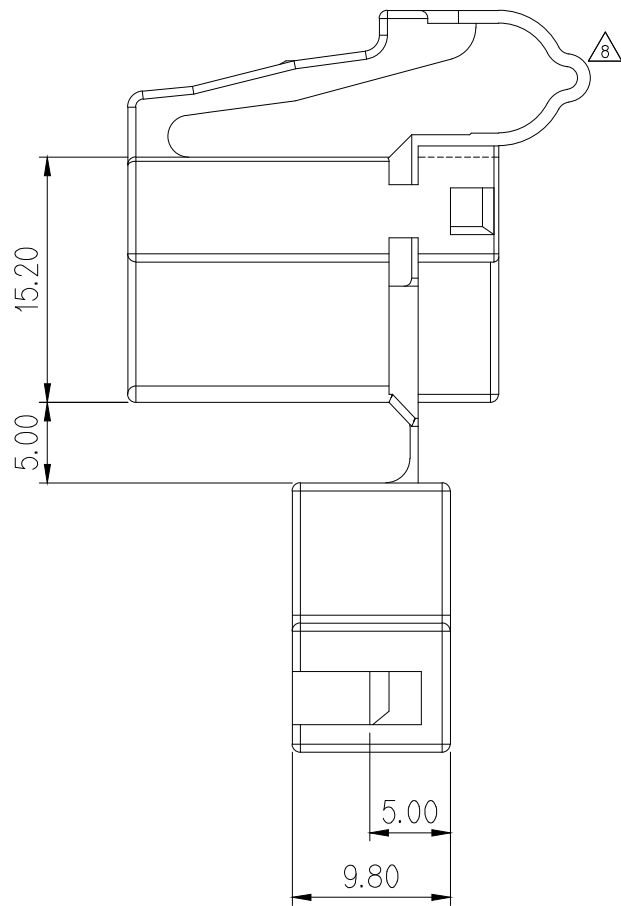
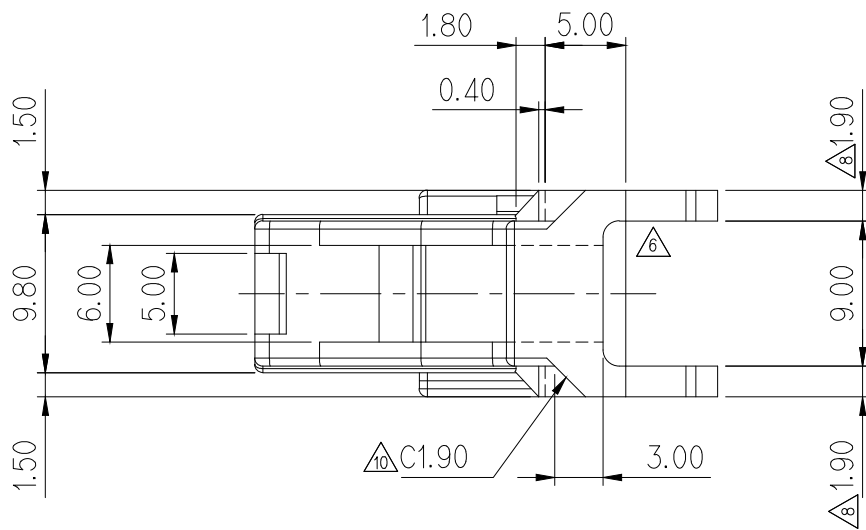


ISO VIEW
(S=1/1)

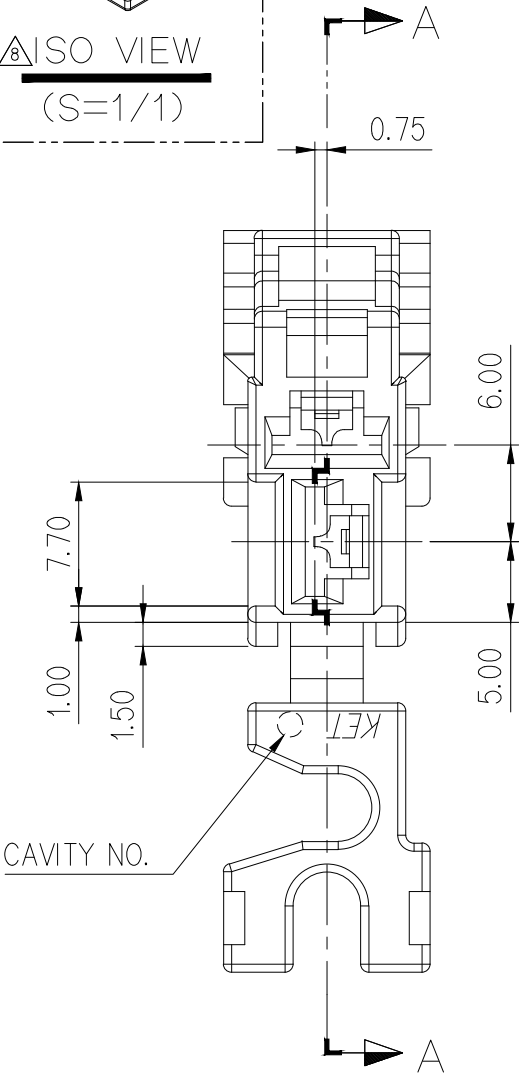

SECTION A-A



SECTION A-A

NOTE

- UNLESS OTHERWISE SPECIFIED ALL RADIOUS TO BE 0.3 – 0.5 RADIUS.
- UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.5 CHAMFER.
- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL :ST730467, 468, 469
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY,CADMIUM,HEXAVALENT CHROMIUM, PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 지시하지 않은 반경 R은 0.3 – 0.5로 한다
- 지시하지 않은 모따기 C는 0.5으로 한다.
- 기능상 유해한 BURR 및 WELDLINE등이 없을 것.
- 적용 TERMINAL: ST730467, 468, 469
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴, 6가크롬,PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

ECO-1702-437 크기 도면 제작성 (원지 부 파손 개선, 도면 현실화)	AJH	KMH	LSY	'17.02.28
ECO-1610-124 크기 도면 제작성	KSC	CJH	LSY	'16.10.08
ECO-1504-532 크기 (원지부 파손 개선)	KCS	HYJ	LSY	'15.04.30

5	ECO-1312-080 큰거	SYC	CSH	CWK	'13.12.09
4	ECO-1210-182 큰거	CKY		HSK	'12.10.25
3	ECO-1112-442 큰거	SJK	CKY	HSK	'11.12.28
2	설계사항변경(S080082)큰거 재작성 (Rear Holder 내측 모서리 R0.5추가)	KHS	HSK	KKJ	'08.04.28
1	형합관련 LOCK LEVER 변경	OH	JJH	KJW	'93.02.19
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE
DR.	OH.92.9.18	CHK.	JJH		
CHK.	KJW	APP.	WATANABE		

NO.	MATERIAL	COLOR
0	NYLON66	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

APPROVED

2017-08-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

KET KOREA ELECTRIC
ENGINEERED TERMINAL CO., LTD.

MATERIAL SEE TABLE

FINISH SEE TABLE

WIRE RANGE CLASS

INSULATION TYPE

TOLERANCE EXCEPT AS NOTED SEE TABLE

SCALE
2/1

PART NO. MG 610263

PART NAME .250 DOUBLE LOCK PLUG HOUSING 2P

USED ON

GENERAL TOLERANCE (HOUSING)

10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE	
±0.15	±0.20	±0.30	±0.40	±0.50	±0.75	±0.90	±1.40	±30'	