


NO.	MATERIAL	COLOR
0	⑤ NYLON66 ① MG610281	NATURAL
1		RED
2		BLUE
20		JADE
3	⑤ PBT ② MG612006	YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

△	NO	PART NO.	MATERIAL	COLOR	APPLICABLE HOUSING
①		MG610281	NYLON66	NATURAL	MG620282
		MG610281-5		BLACK	
②		MG612006	PBT	NATURAL	MG622007
		MG612006-2		BLUE	

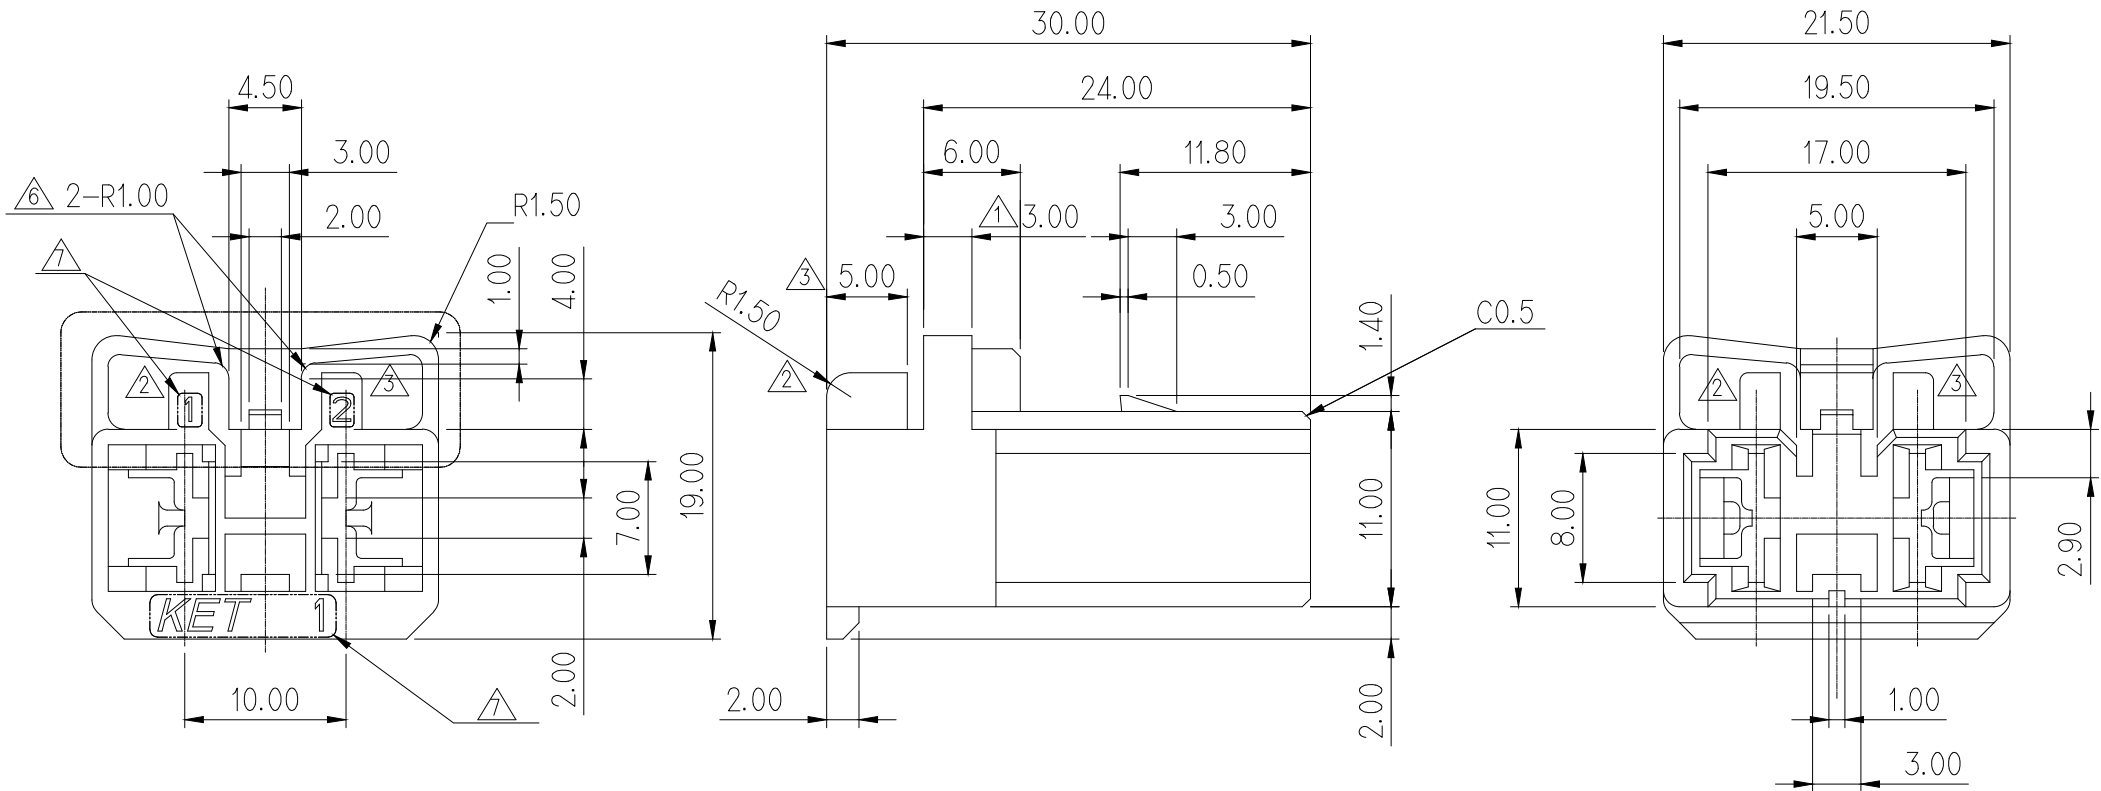

△	ECO-2107-192 근거 도면 변경	SKM	YDH	HYJ	21.07.22
△	실계사양변경(S060216)의거 도면 수정	KSH	LBG	JJH	06.07.27

GENERAL TOLERANCE (HOUSING)									USED ON
10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE	
±0.15	±0.20	±0.30	±0.40	±0.50	±0.75	±0.9	±1.4	±30'	

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE HOUSING : SEE TABLE
- APPLICABLE TERMINAL : ST730371-3, ST730372-3
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 기능상 유해한 FLASH, SINK, 미성형 등이 없을것.
- 적용 HOUSING : SEE TABLE
- 적용 TERMINAL: ST730371-3, ST730372-3
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

APPROVED

2021-11-03

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

⑤	원재료 및 PART NO 추가	KKJ	LBG	JJH	99.05.03	MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.
④	DIM 오기입 1곳(8.4→8.2)	KKJ	KCC	WAT	96.08.29	FINISH	SEE TABLE	
③	향상 반강(LOCK'G성 개선)	SIK		WAT	93.07.26	WIRE RANGE		
②	형상 변경(돌기부 추가)	SIK		WAT	92.12.22	INSULATION		
①	LOCK부 형상 수정	SIK		WAT	92.10.29			CLASS
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG610281 △ MG612006
DR.	KKJ 90.07.25	CHK.				PART NAME .312 PLUG HOUSING 2P		
CHK.	JWK 90.07.25	APP.	WAT	90.08.31				