
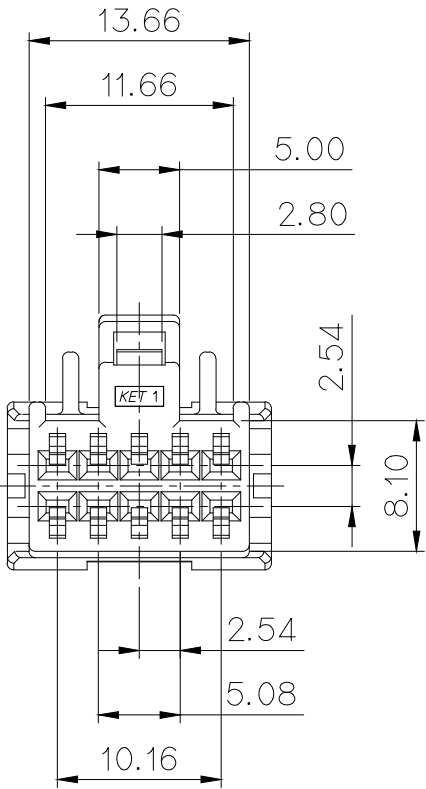
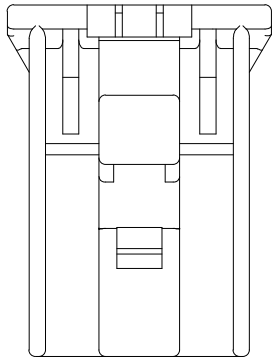
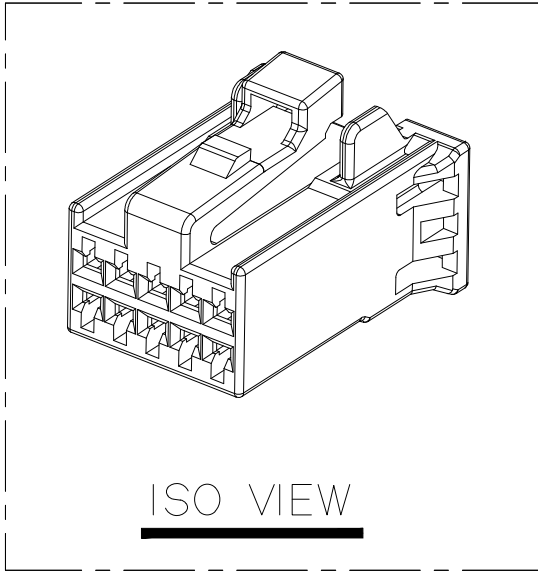
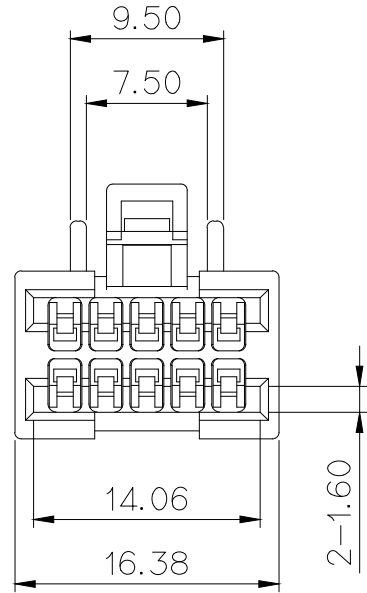


NOTE

- 1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE R0.4
- 2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3
- 3. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- 4. APPLICABLE REAR HOLDER : MG630375
- 5. APPLICABLE TERMINAL(SP) : ST730517-3
- 6. APPLICABLE HOUSING : MG640374
- 7. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

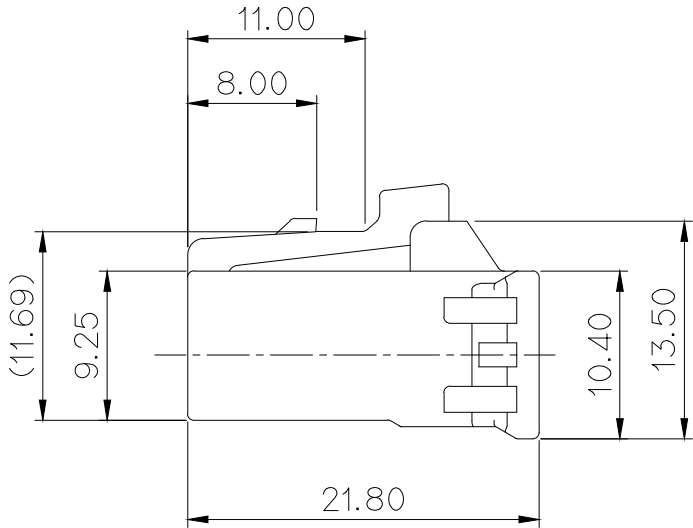

주 기

- 1.지시하지 않은 반경 R은 0.4으로 한다.
- 2.지시하지 않은 모따기 C는 0.3으로 한다.
- 3.기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 4.적용 REAR HOLDER : MG630375
- 5.적용 TERMINAL(SP) : ST730517-3
- 6.적용 HOUSING : MG640374
- 7. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬 PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

					MATERIAL		PBT	 KOREA ELECTRIC TERMINAL CO., LTD.			
					FINISH		NATURAL				
					WIRE RANGE			CLASS	SP		
					INSULATION			TYPE			
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO.	MG610372
DR. H.S.KIM 09.05.08			CHK.			PART NAME					
CHK.			APP.			SP 10F HOUSING					

ISSUE MARK