

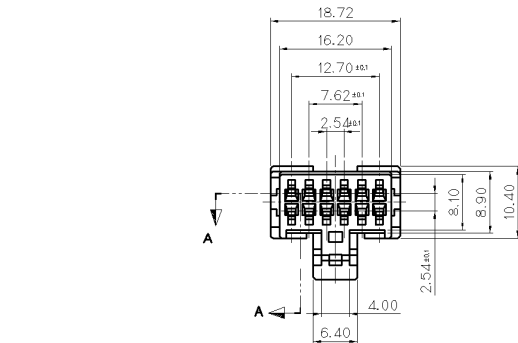


SECTION A-A

△ NO.	MATERIAL	COLOR
* 0	PBT	NATURAL
1		RED
2		BLUE
3		YELLOW
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE



SECTION B-B



GENERAL TOLERANCE (HOUSING)

10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	USED ON
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

△ 주 기

1. 지시하지 않은 반경 R은 0.4으로 한다.
2. 지시하지 않은 모따기 C는 0.5으로 한다.
3. 기능상 유해한 BURR 및 WELDLINE등이 없을것.
4. 적용 TERMINAL : ST730517-3
5. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

△ NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.4 RADIUS.
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.5 CHAMFER.
3. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
4. APPLICABLE TERMINAL : ST730517-3
5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXA VALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.



ISSUE MARK

						MATERIAL	SEE TABLE	KET ENGINEERING	KOREA ELECTRIC
						FINISH	SEE TABLE		TERMINAL CO., LTD.
						WIRE RANGE		CLASS	
						INSULATION		TYPE	
								SCALE	
							SEE TABLE	2/1	PART NO.
						PART NAME	MG610376		
						SP 12F HOUSING			