
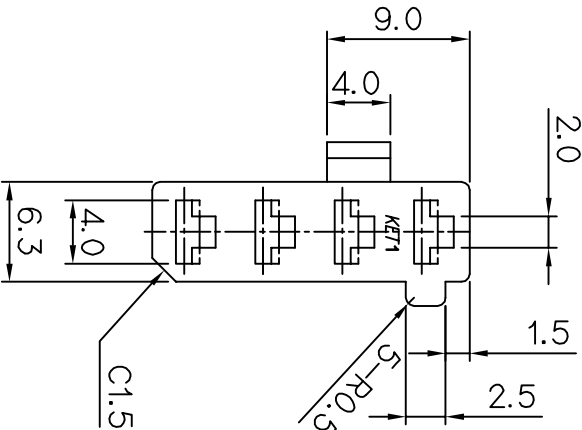
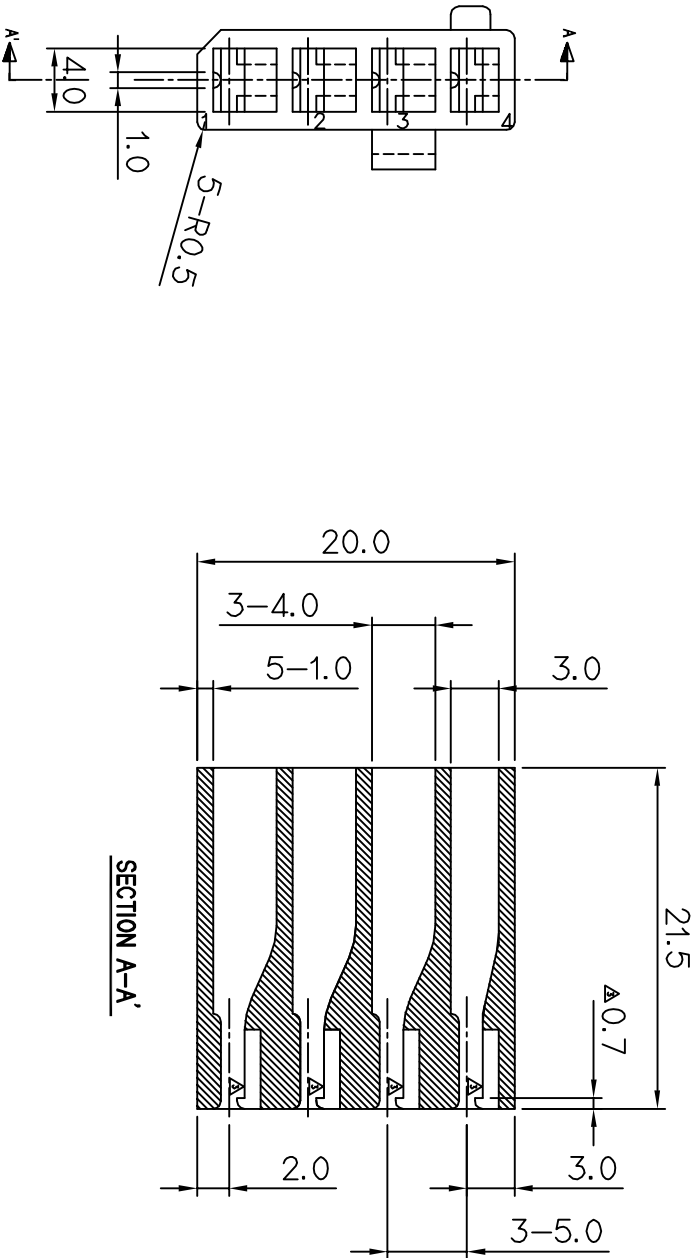


GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

- 주 기
- 1. 기능상 유해한 BURR 및 WELDLINE등이 없을것.
 - 2.적용 TERMINAL : ST730099, 997, 1032,
 - 3.제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬 PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

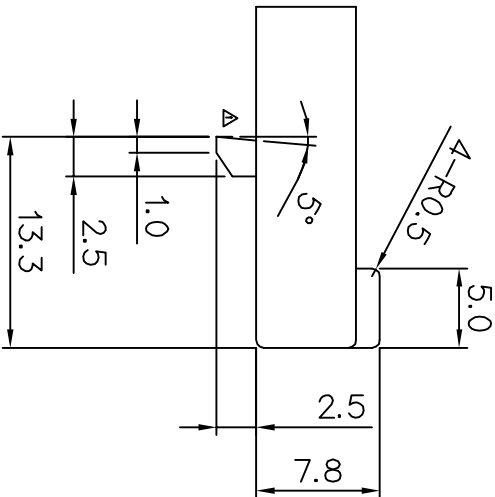

Part NO.	원 재 료	비 고
MG610420	PA66(V0)	
MG620420T	PBT(G.W.I.T)	

ISSUE MARK

KIEP KOREA ELECTRIC
ENGINEERED
TERMINAL CO., LTD.

					MATERIAL	SEE TABLE	
△	설계시양변장"ST10128" 근거 도면 재작성				FINISH	NATURAL	
△	설계시양변장"ST100068" 근거 수정	PJM		"11.04.28	WIRE RANGE		CLASS
△	설계시양변장"SO60189" 근거 수정	JUY		06.07.07	INSULATION		TYPE
△	외판 LOCK 추가	HAN		92.07.15			
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE AS PER SPEC	
DR.	HAN 91.02.12	CHK.			SEE TABLE	SCALE	PART NO.
CHK.	S. W. Lee	APP.			PART NAME	2/1	SEE TABLE
.110 PLUG 4P HS'G							

- NOTE
- 1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
 - 2. APPLICABLE TERMINAL : ST730099, 997, 1032
 - 5. 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION