
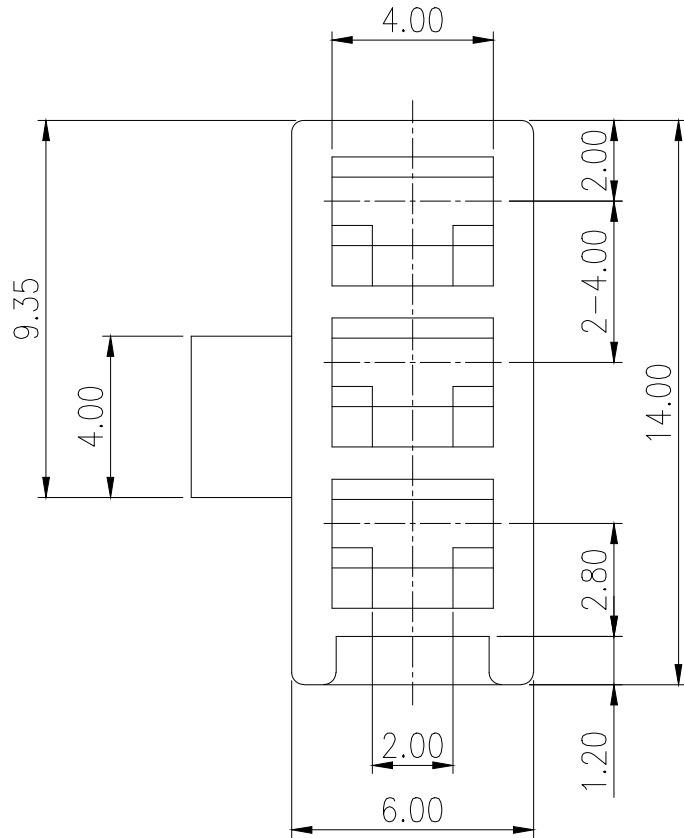
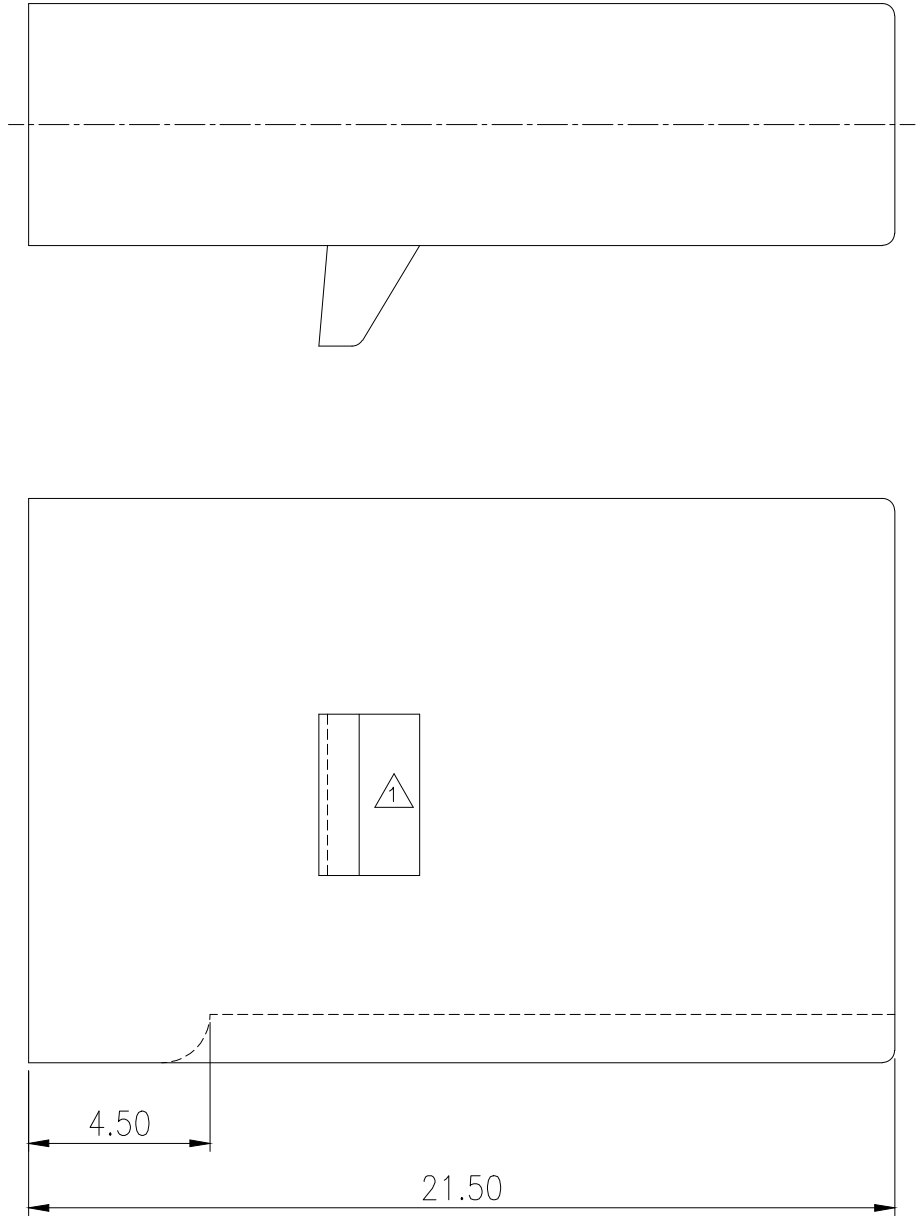


NOTE

1. MUST BE FREE OF FLASH, SINK
AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST730099, 997, 1032
5. 6HAZARDOUS SUBSTANCES IN PARTS (Lead,
Mercury, Cadmium, Hexavalent Chromium, PBBs,
PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE
CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE
& RoHS REGULATION

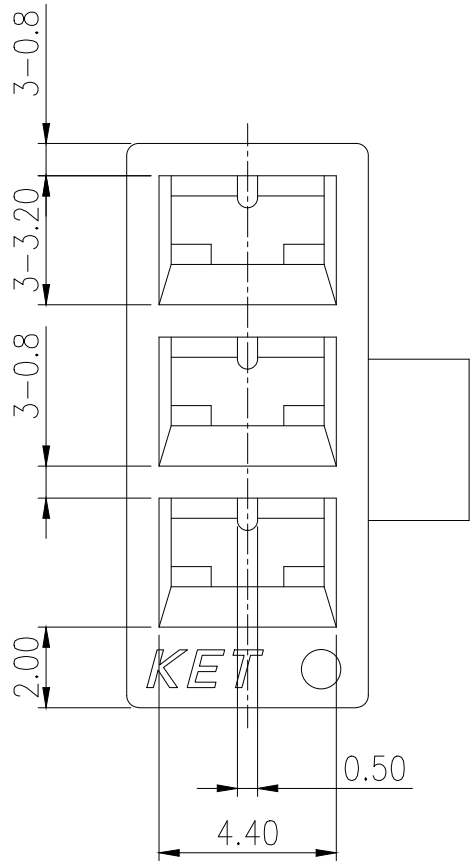

주 기

1. 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 2.적용 TERMINAL : ST730099, 997, 1032
- 3.제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬
PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한
최대 허용농도를 초과해서는 안 된다.

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

APPROVED

2017-08-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Product Development Team

ISSUE MARK

						MATERIAL PA66(V0)		 KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH NATURAL		
						WIRE RANGE		
2	설계사양변경(S110128) 근거 도면 제작성					"11.04.28		CLASS
1	외부 LOCK 추가	HAN				"93.03.30		TYPE
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 5/1	PART NO. MG610421
DR. HAN 91.02.12		CHK.		2/12		PART NAME .110 PLUG 3P HS'G		
CHK.		APP.						