

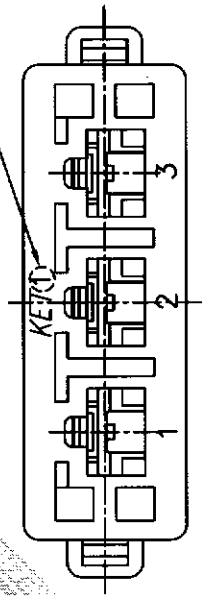
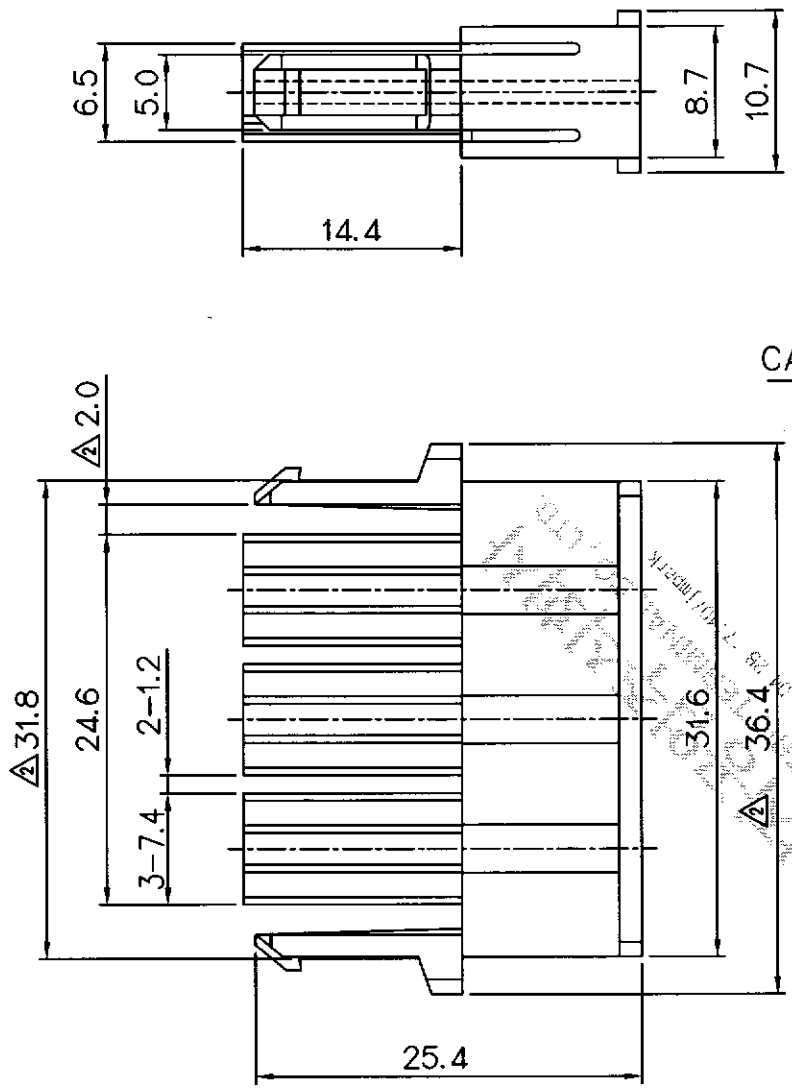


CUSTOMER DRAWING

PART NO.
MG610439 / MG610439P

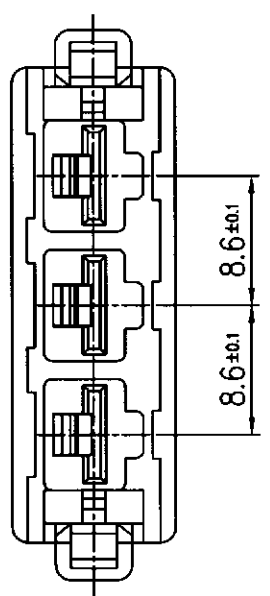

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

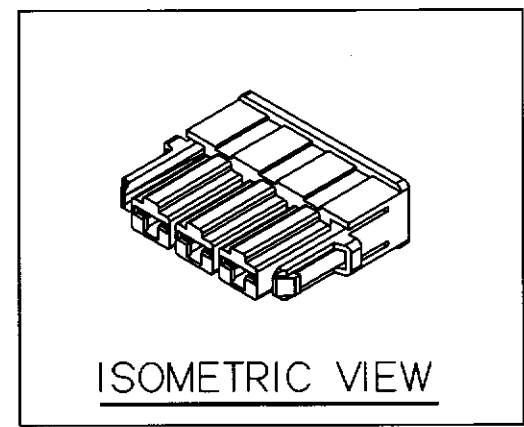

NO.	PART NO.	적용 원재료
1	MG610439	△ PA66
△ 2	MG610439P	PBT (V0)

NO.	MATERIAL	COLOR
* 0	PA66 or PBT	NATURAL
1		RED
2		BLUE
3		YELLOW
5		BLACK

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST730494-3
- 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 터미널 : ST730494-3
- 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

						MATERIAL SEE TABLE		KIET KOREA ELECTRIC	
△	설계사양변경(S110128)근거 도면 제작성	PJM	4/28	3/28	'11.04.28	FINISH NATURAL		ENGINEERED TERMINAL CO., LTD.	
3	S050150근거 수정		4/28	4/28	'05.07.01	WIRE RANGE		CLASS G/S 세탁기 MOTOR	
2	S040159 근거 치수변경 (3곳)	LSY	4/28	4/28	'04.10.20	INSULATION		TYPE N.T	
1	S040114 근거 원재료 표기 수정		4/28	4/28	'04.08.25	TOLERANCE EXCEPT AS NOTED SEE TABLE		SCALE 2/1	PART NO. △
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	PART NAME		MG610439 / MG610439P	
DR. '91.12.10		CHK.				.187 P-LOCK PLUG HS'G 3P			
CHK. S. w		APP. W. f							

ISSUE MARK