


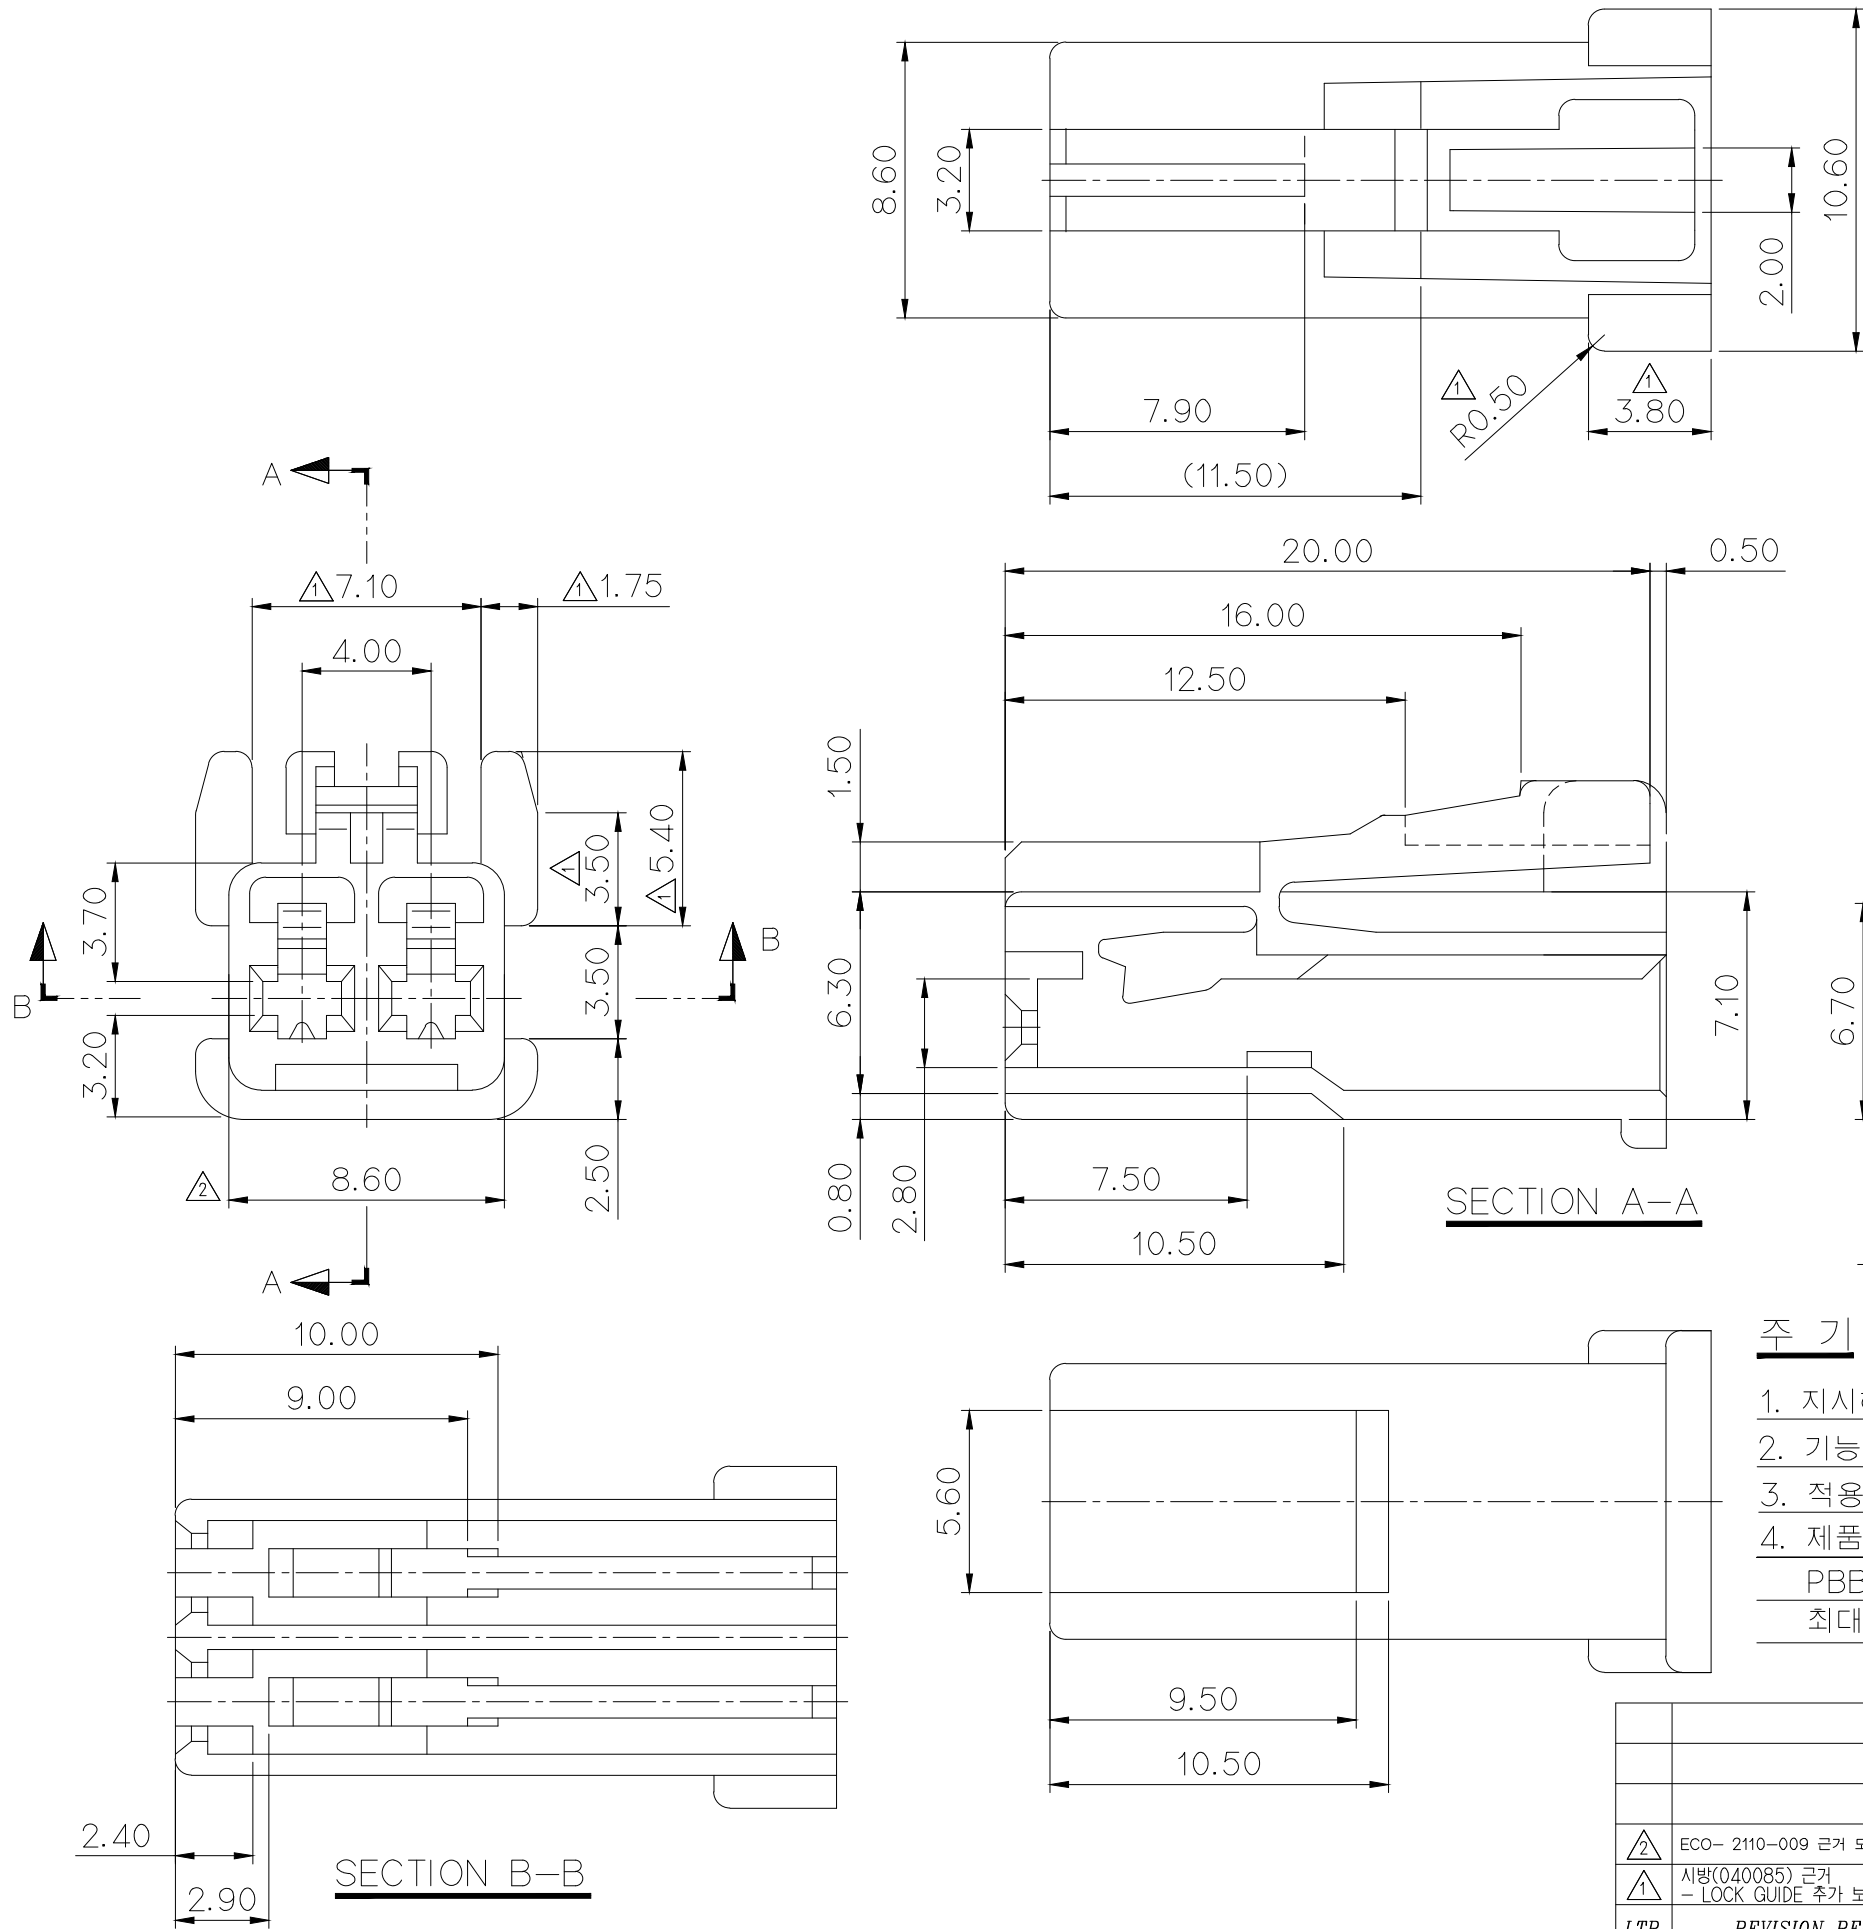

GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

- NOTE
1. UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.5 RADIUS.
 2. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
 3. APPLICABLE TERMINAL: ST730365, 366, 431
 4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE.

- 주 기
1. 지시하지 않은 반경 R은 0.5로 한다
 2. 기능상 유해한 BURR 및 WELDLINE등이 없을것
 3. 적용 TM'L : ST730365, 366, 431
 4. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

						MATERIAL	PBT	 KOREA ELECTRIC TERMINAL CO., LTD.			
						FINISH	NATURAL				
						WIRE RANGE		CLASS			
						INSULATION		TYPE			
LTR	REVISION RECORD				DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.
									SEE TABLE	4/1	MG610489
DR.	경 93.03.05				CHK. JJH			PART NAME			
CHK.	S. w k				APP. W. J. H			090 PLUG HS'G 2P			

APPROVED

2021-10-22

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK