


PART NO. SEE TABLE

CUSTOMER DRAWING

DIMENSIONS IN MM

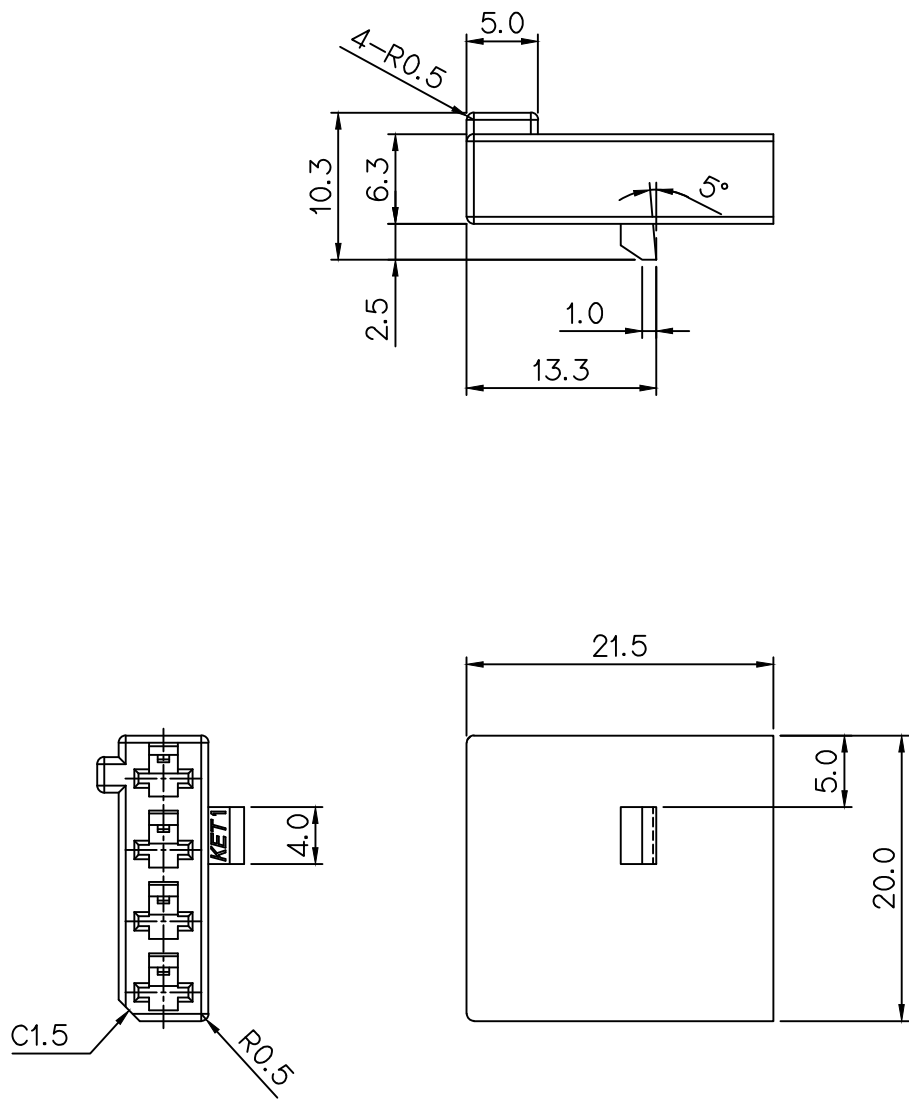


NOTE

1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST730052, 1019, 1032
5. 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

주 기

1. 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 2.적용 TERMINAL : ST730052, 1019, 1032
- 3.제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬 PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

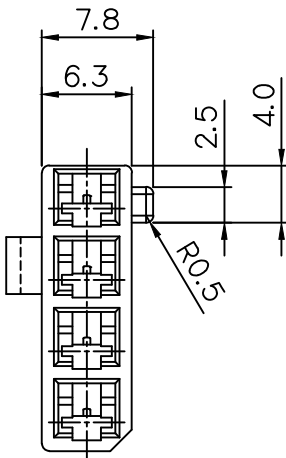

PART No.	적 용 원 재 료	비 고
MG610565	PBT(V0)	
MG610565T	PBT(G.W.I.T)	



ISSUE MARK

					MATERIAL	SEE TABLE	IKIET ENGINEERED	KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH	NATURAL		
					WIRE RANGE		CLASS	
					INSULATION		TYPE	
2	설계사양변경(S060189) 근거 도면 재작성	LCM	KSH	11.04.28	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO.	SEE TABLE
1	설계사양변경(S060189) 근거 수정	JJY		06.07.07				
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE			
DR. HAN 92.11.27		CHK.			PART NAME			
CHK. S. W. K		APP.			.110 PLUG 4P HS'G			