


GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기




- 1.기능상 유해한 FLASH, SINK,WELDLINE 등이 없을것.
- 2.적용 TERMINAL: ST730459-3, 730460-3,
ST730461-3, 730462-3
- 3.적용 HOUSING:MG620582
- 4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬,
PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서
지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. MUST BE FREE OF FLASH, SINK, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST730459-3, 730460-3,
ST730461-3, 730462-3
3. APPLICABLE HOUSING : MG620582
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY,
CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL
NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION
PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

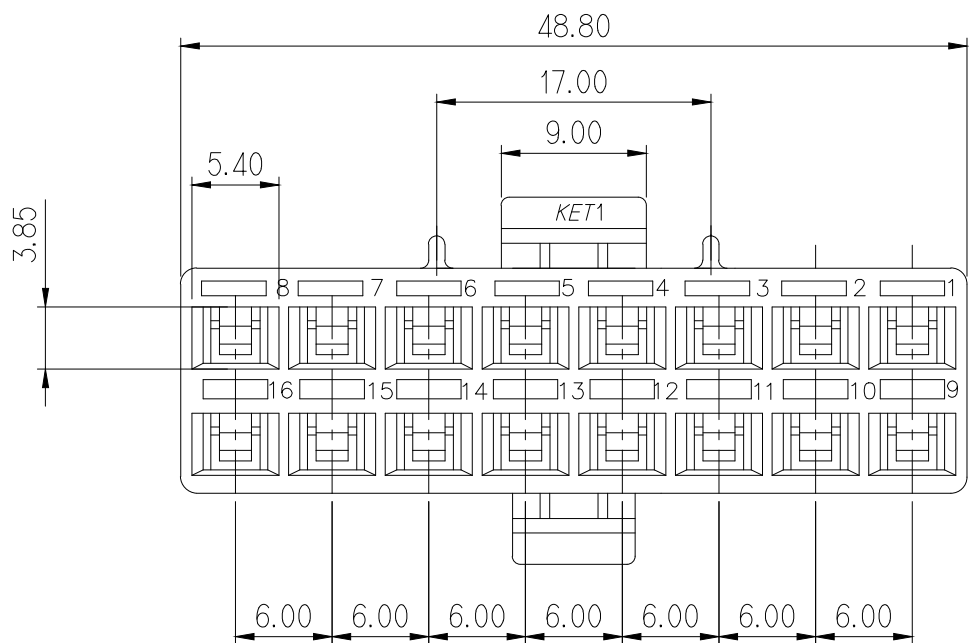

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
4	GRAY
5	BLACK
6	WHITE GREEN
7	BROWN
8	GREEN

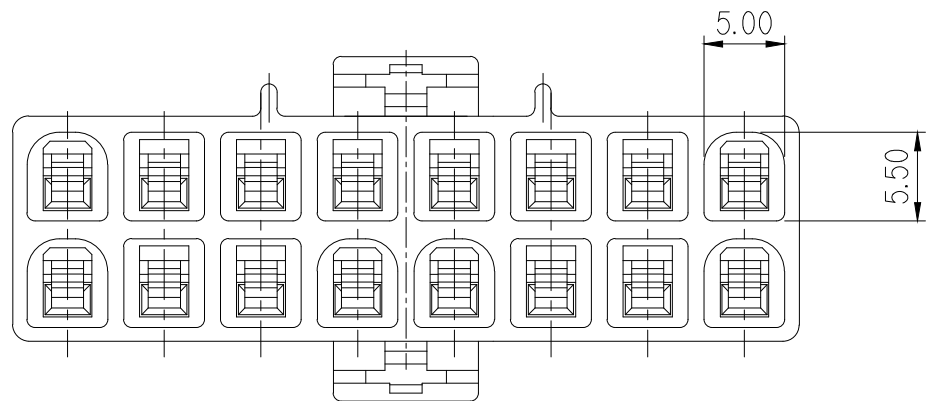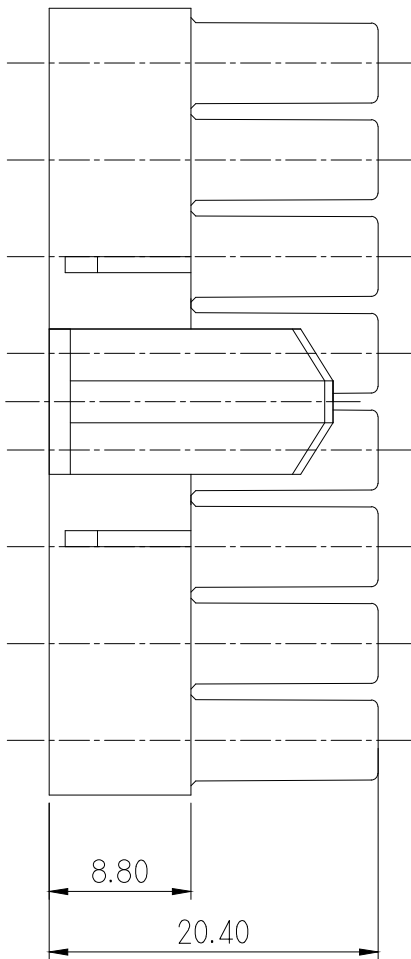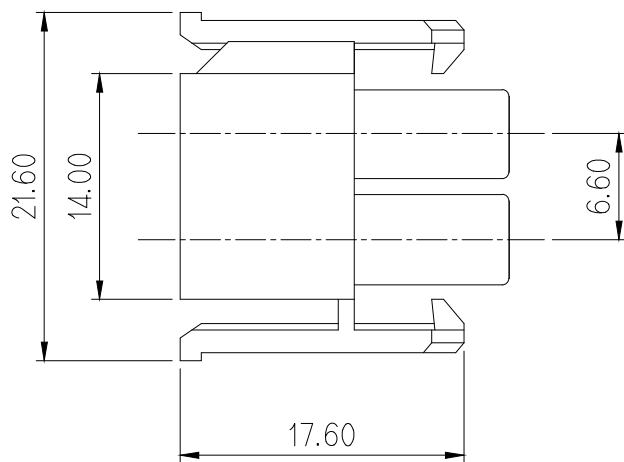

APPROVED

2017-08-10

**KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team**

ISSUE MARK

						MATERIAL	PBT(94V-0)		 KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH	SEE TABLE		
						WIRE RANGE	CLASS		
						INSULATION	TYPE		
①	설계사양변경(S110128)근거 도면 재작성		DR.	CHK.	APP.	DATE	'11.04.28		
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE SCALE 2/1	PART NO. MG610581
DR. HAN '92.12.05			CHK. <i>M</i>			PART NAME			
CHK. <i>J. w k</i>			APP. <i>W. J. Kim</i>			1806 16F HOUSING			