

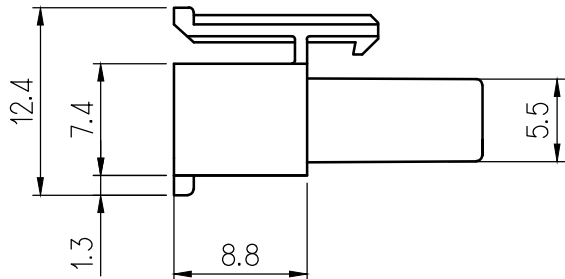
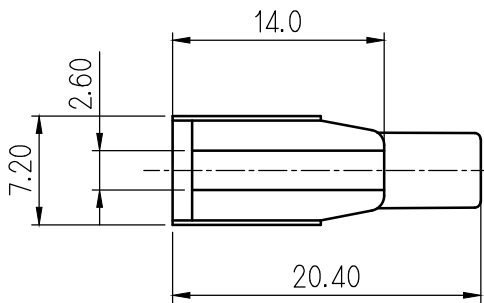


GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	ST730459
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

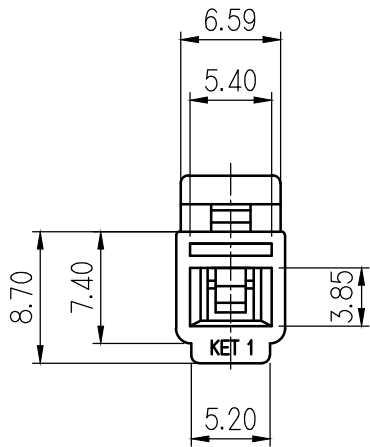


주 기

- 1.기능상 유해한 FLASH, SINK,WELDLINE 등이 없을것.
- 2.적용 TERMINAL: ST730459-3, 730460-3, ST730461-3, 730462-3
- 3.적용 HOUSING:MG640595
- 4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. MUST BE FREE OF FLASH, SINK,WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST730459-3, 730460-3, ST730461-3, 730462-3
3. APPLICABLE HOUSING : MG640595
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
5	BLACK
8	GREEN

					MATERIAL NYLON66(94V-2)		 KOREA ELECTRIC TERMINAL CO., LTD.			
					FINISH SEE TABLE					
					WIRE RANGE					
					INSULATION					
	설계사양변경(S110128)근거 도면 재작성					'11.04.28	TOLERANCE EXCEPT AS NOTED SEE TABLE	SCALE 2/1	PART NO. MG610596	
LTR	REVISION RECORD			DR.	CHK.	APP.				DATE
DR.		HAN 93.01.15		CHK. 						
CHK.				APP.						
PART NAME								1806 1F PCB HOUSING		

ISSUE MARK