

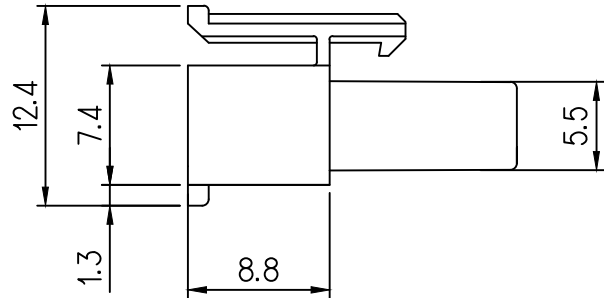
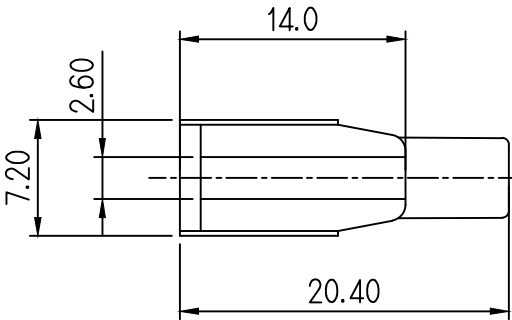


NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
5	BLACK
8	GREEN

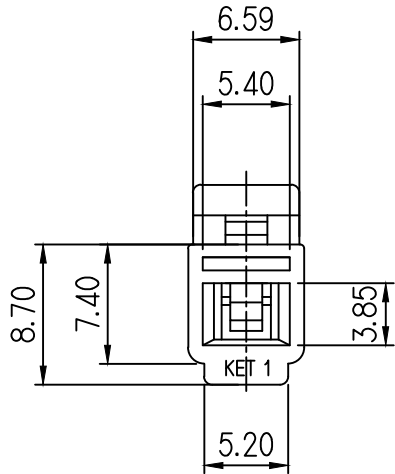

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	ST730459
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

- 1.기능상 유해한 FLASH, SINK,WELDLINE 등이 없을것.
- 2.적용 TERMINAL: ST730459-3, 730460-3,
ST730461-3, 730462-3
- 3.적용 HOUSING:MG640595
- 4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬,
PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서
지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. MUST BE FREE OF FLASH, SINK,WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST730459-3, 730460-3,
ST730461-3, 730462-3
3. APPLICABLE HOUSING : MG640595
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY,
CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL
NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION
PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

ISSUE MARK

						MATERIAL NYLON66(94V-2)		KIET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.		
						FINISH SEE TABLE				
						WIRE RANGE		CLASS		
						INSULATION		TYPE		
⚠	설계사양변경(S110128)근거 도면 재작성		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED SEE TABLE		SCALE 2/1	PART NO. MG610596
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	PART NAME			
DR. HAN 93.01.15			CHK. <i>[Signature]</i>				1806 1F PCB HOUSING			
CHK. <i>S. w [Signature]</i>			APP.							