



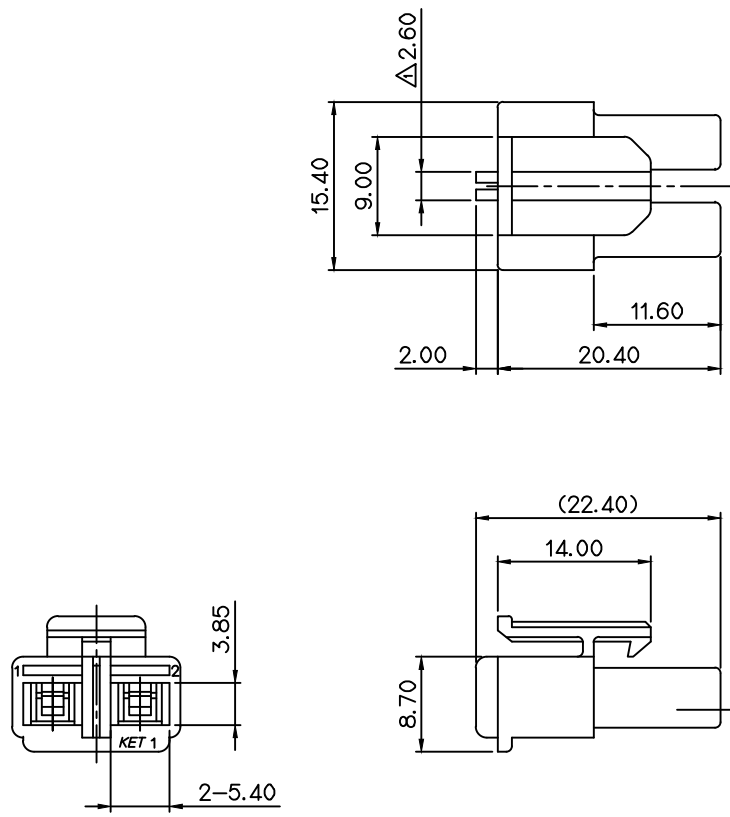

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

NO.	MATERIAL	COLOR
0	PA66	NATURAL
1		RED
2		BLUE
3		YELLOW
5		BLACK

NO.	PART NO.	MATERIAL
1	MG610599	PA66 (V2)
2	MG610599R	PA66 (GWIT)



NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL: ST730459-3/460-3/461-3/462-3
HOUSING : MG640598/MG640598R
- 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 터미널 : ST730459-3/460-3/461-3/462-3
하우징 : MG640598/MG640598R
- 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

ISSUE MARK

								KOREA ELECTRIC TERMINAL CO., LTD.	
						MATERIAL		SEE TABLE	
						FINISH		SEE TABLE	
설계사양변경(S110428)근거 도면 재작성		PJM				'11.04.28		WIRE RANGE	
설계사양변경(S040114)근거 도면 재작성		HAN				'04.08.25		CLASS	
PITCH 수정 (교역 요청)		HAN				'93.06.05		INSULATION	
LTR		REVISION RECORD		DR.		CHK.		APP.	
DATE						TOLERANCE EXCEPT AS NOTED		SCALE 2/1	
DR. HAN '93.01.14		CHK.				PART NO.		MG610599/MG610599R	
CHK. S. W. K.		APP.				PART NAME		1806 PLUG HOUSING 2P (PCB TYPE)	