
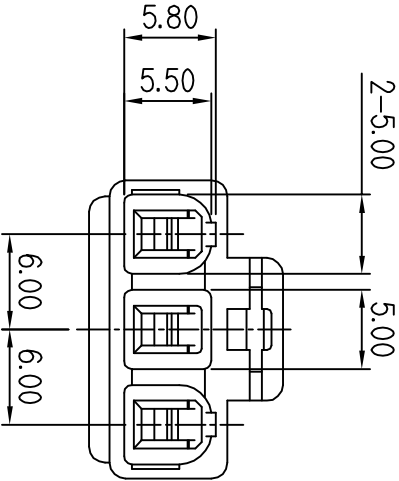
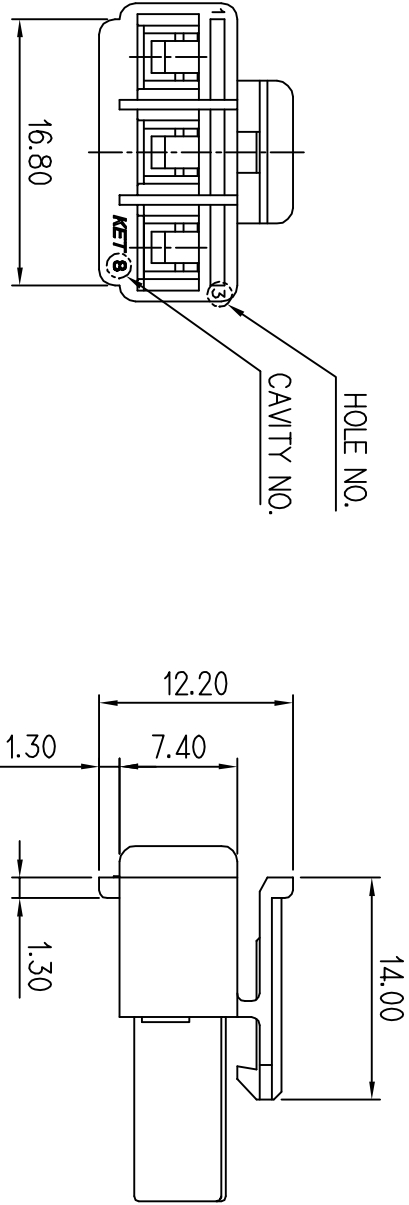


GENERAL TOLERANCE (HOUSING)						USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1

PART NO.  MG610606

CUSTOMER DRAWING

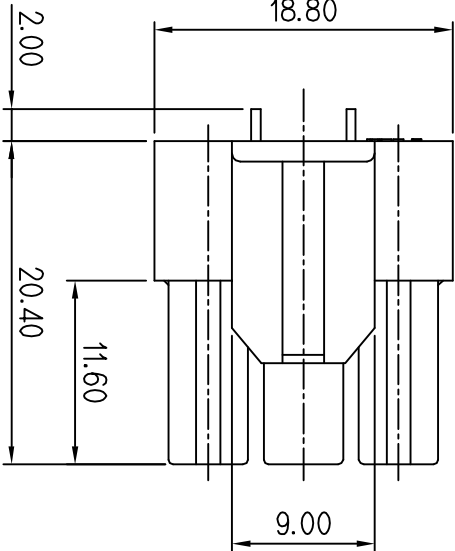

NOTE

1. MUST BE FREE OF FLASH, SINK, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST730459-3, 730460-3, ST730461-3, 730462-3

 3. APPLICABLE HOUSING MG640608

4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

1. 기능상 유해한 FLASH, SINK, WELDLINE 등이 없을 것.
2. 적용 TERMINAL: ST730459-3, 730460-3, ST730461-3, 730462-3
3. 적용 HOUSING: MG640608 / MG640608R
4. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안 된다.

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
5	BLACK
8	GREEN

(DIMENSIONS IN MM)

	ECO-1205-082 크기 도면 제작일		PJM-2105-1205	12.05.14	MATERIAL	NYLON			
	설계(8번) (S110128) 크기 도면 제작일		LSY-2105-1205	11.04.28	FINISH	NATURAL			
	S040165 크기 차수 변경(1회)		LSY-2105-1205	04.10.23	WIRE RANGE				
	S040114 크기 P/NO 추가		LSY-2105-1205	04.08.25	INSULATION				
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	SCALE			
DR.	HAN, '93.7.12	CHK.	WJ			2/1	PART NO.	 MG610606	
CHK.	S. W. K.	APP.	WJ				PART NAME		

1806 3F PCB HOUSING

ISSUE MARK