

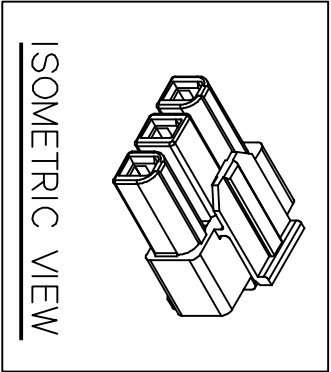
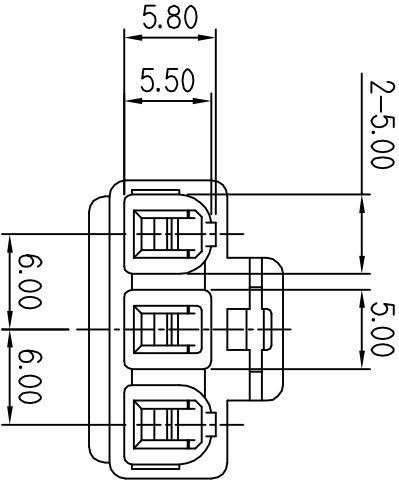


GENERAL TOLERANCE (HOUSING)						USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1

PART NO. MG610606R

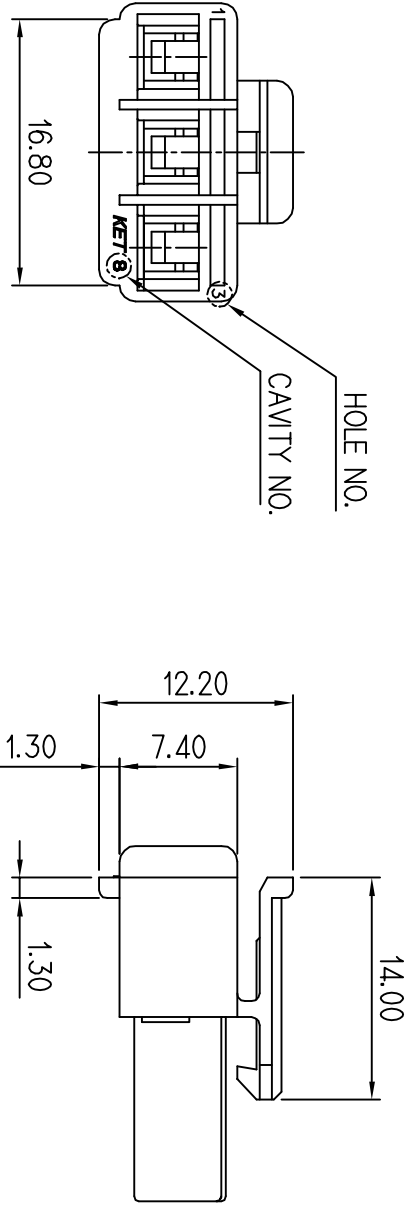

ISOMETRIC VIEW

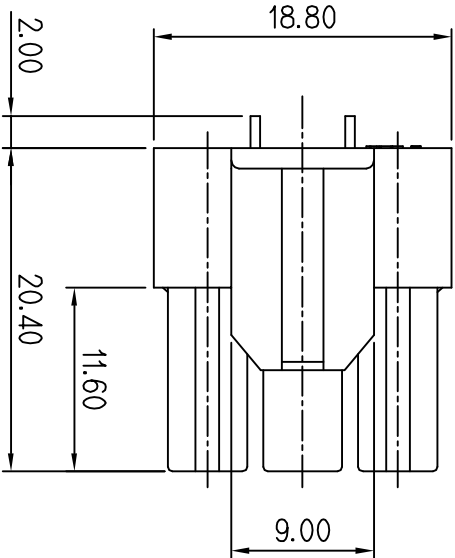

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
5	BLACK
8	GREEN

NOTE

- MUST BE FREE OF FLASH, SINK, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST730459-3, 730460-3, ST730461-3, 730462-3
- APPLICABLE HOUSING MG640608R
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

ISSUE MARK

주 기

- 기능상 유해한 FLASH, SINK, WELDLINE 등이 없을 것.
- 적용 TERMINAL: ST730459-3, 730460-3, ST730461-3, 730462-3
- 적용 HOUSING : MG640608R
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안 된다.

(DIMENSIONS IN MM)

CUSTOMER DRAWING

					MATERIAL	NYLON / V0	KIEP KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
					FINISH	NATURAL	
					WIRE RANGE		
					INSULATION		
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	SCALE	PART NO.
DR.	PJM '12. 05. 14	CHK.				2/1	MG610606R
CHK.		APP.					
TOLERANCE AS NOTED							
SEE TABLE							
PART NAME							

1806 3F PCB HOUSING