

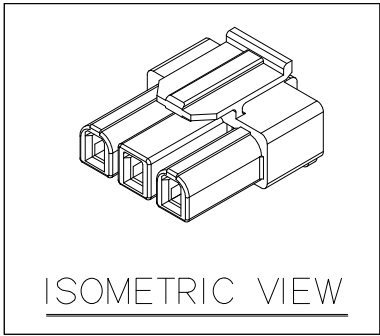
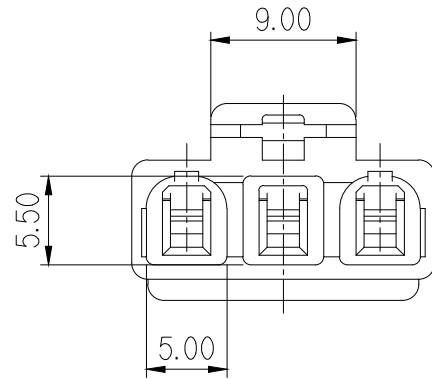


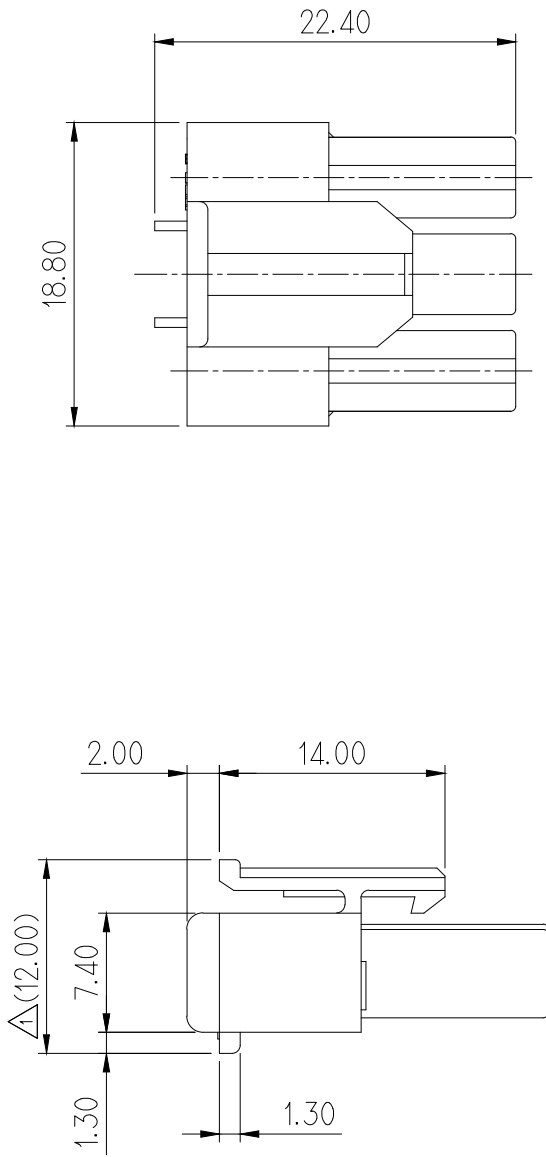

ISOMETRIC VIEW

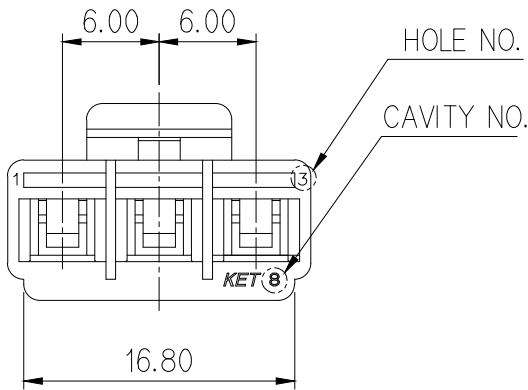

△ GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

△ NO	PART NO.	APPLICABLE MATERIAL
1	MG610606R	PA66(V0)
2	MG610606T	PET+PC(GWIT)

△ NO.	COLOR	MG610606R	MG610606T
0	NATURAL	*	*
1	RED	*	
2	BLUE	*	*
3	YELLOW		
4	GRAY		
5	BLACK		
6	GREEN		

NOTE

- MUST BE FREE OF FLASH, SINK,WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APLICABLE TERMINAL : ST730459-3, 730460-3, ST730461-3, 730462-3
- APLICABLE HOUSING MG640608R
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 기능상 유해한 FLASH, SINK,WELDLINE 등이 없을것.
- 적용 TERMINAL: ST730459-3, 730460-3, ST730461-3, 730462-3
- 적용 HOUSING :MG640608R
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK

					MATERIAL △SEE TABLE	KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH △SEE TABLE		
△2	ECO-1812-229근거 도면 제작성	YHJ KSH	KHG	'18.12.14	WIRE RANGE	CLASS	
△1	ECO-1702-228근거 도면 제작성	LYS KSH	BUC	'17.02.14	INSULATION	TYPE	
△0	ECO-1205-082근거 도면 제작성	PJM		'12.05.14	TOLERANCE EXCEPT AS NOTED SEE TABLE	SCALE 2/1	PART NO. △MG610606R,0606T
LTR	REVISION RECORD	DR. CHK.	APP.	DATE	PART NAME	1806 3F PCB HOUSING	
DR.	PJM '12. 05. 14	CHK.					
CHK.		APP.					