


주 기




1. 지시하지 않은 모서리반경 (R)은 0.5
2. 기능상 유해한 BURR 및 변형등이 없을 것.
3. COLOR: NATURAL, △ BLACK, △ BROWN
4. 적용 TERMINAL: ST730722, ST730723
5. 적용 REAR HOLDER: MG630660
6. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서
지정한 최대 허용 농도를 초과해서는 안된다.

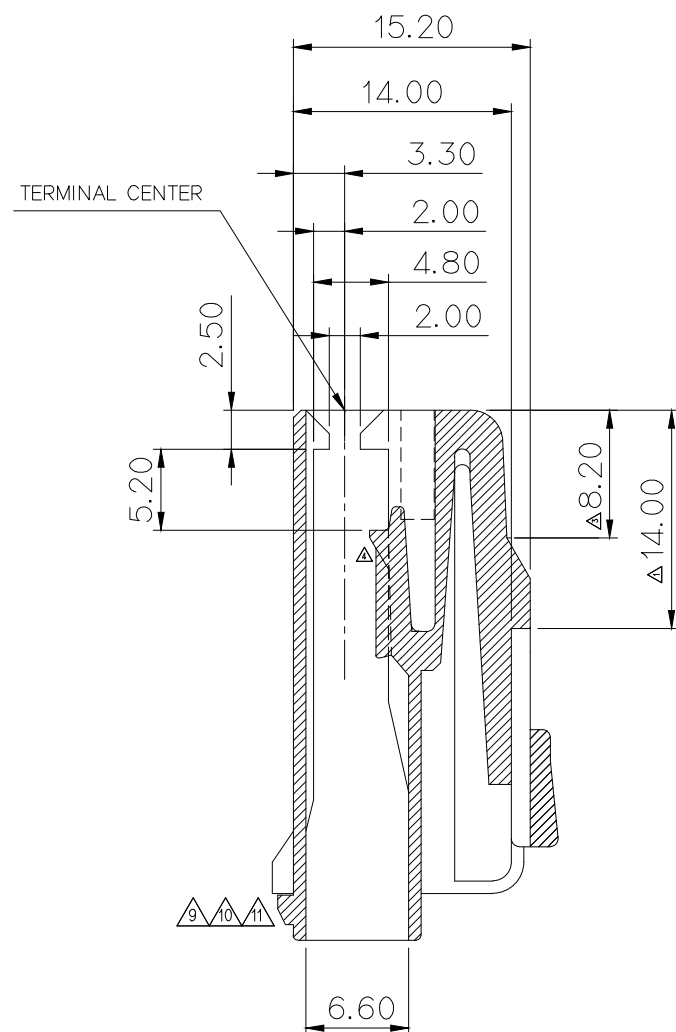

SECTION. A-A

NOTE


1. UNLESS OTHERWISE SPECIFIED ALL RADIUS
TO BE 0.5 RADIUS.
2. MUST BE FREE OF BURR, WELDLINE
3. COLOR: NATURAL,  BLACK,  BROWN
4. APPLICABLE TERMINAL: ST730722, ST730723
5. APPLICABLE REAR HOLDER: MG630660
6. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD
MERCURY,CADMIUM,HEXAVALENT CHROMIUM,
PPBs,PPDEs) SHALL NOT EXCEED THE MAXIMUM
PERMISSIBLE CONCENTRATION PRESCRIBED
UNDER EU ELV DIRECTIVE & RoHS REGULATION.

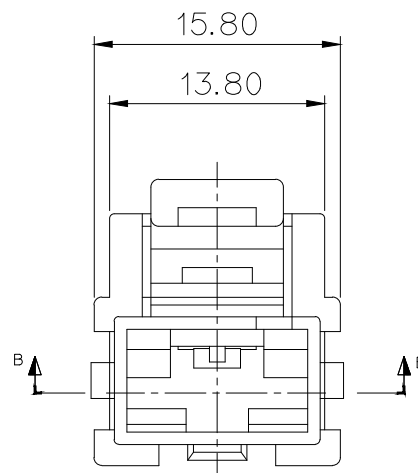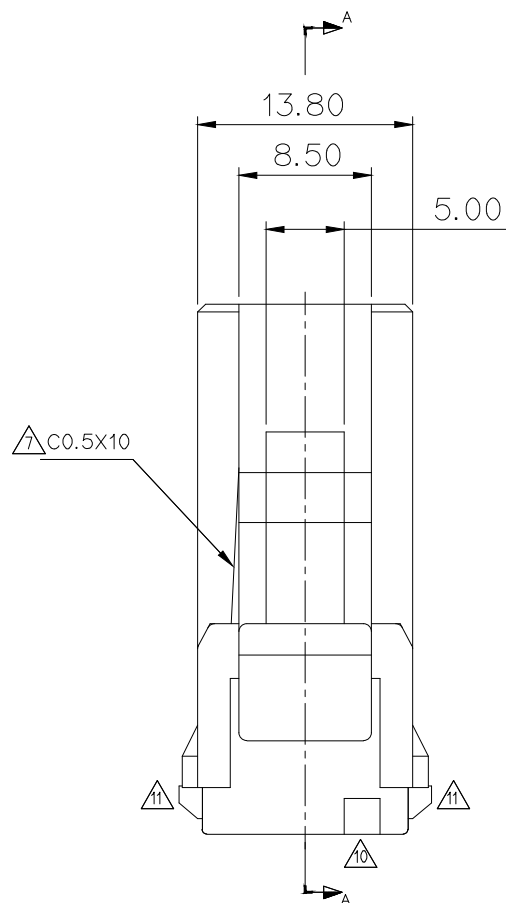


	ECO-1606-190 근거 도면 변경 (Look부 크기 축소)		LSY	'16.06.16
	ECO-1605-254 근거 도면 변경 (추가 Look부 크기 축소 및 키코드 추가)		LSY	'16.05.19
	ECO-1604-187 근거 도면 변경 (Look부 개구량 및 기종 Look 크기증대)		LSY	'16.04.15

GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	


△ KEY CODE OPTIONS

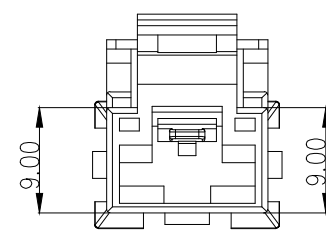



A-TYPE
(P/NO.:MG615575)

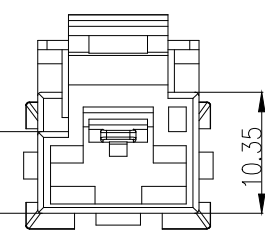

B-TYPE
(P/NO.:MG610658)

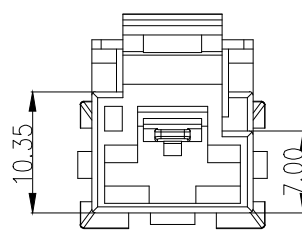

C-TYPE
(P/NO.:MG613689)

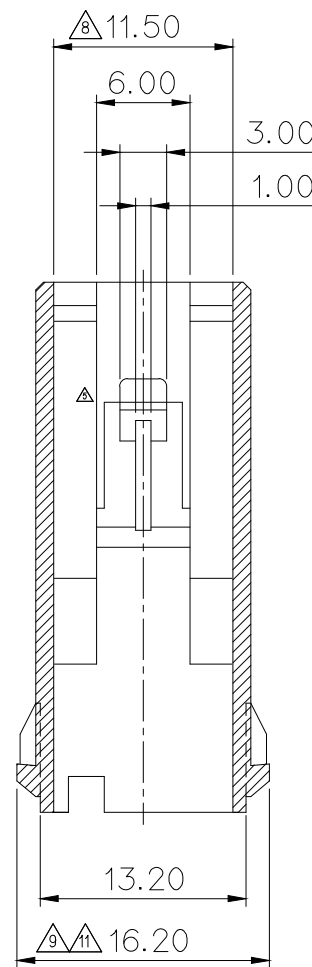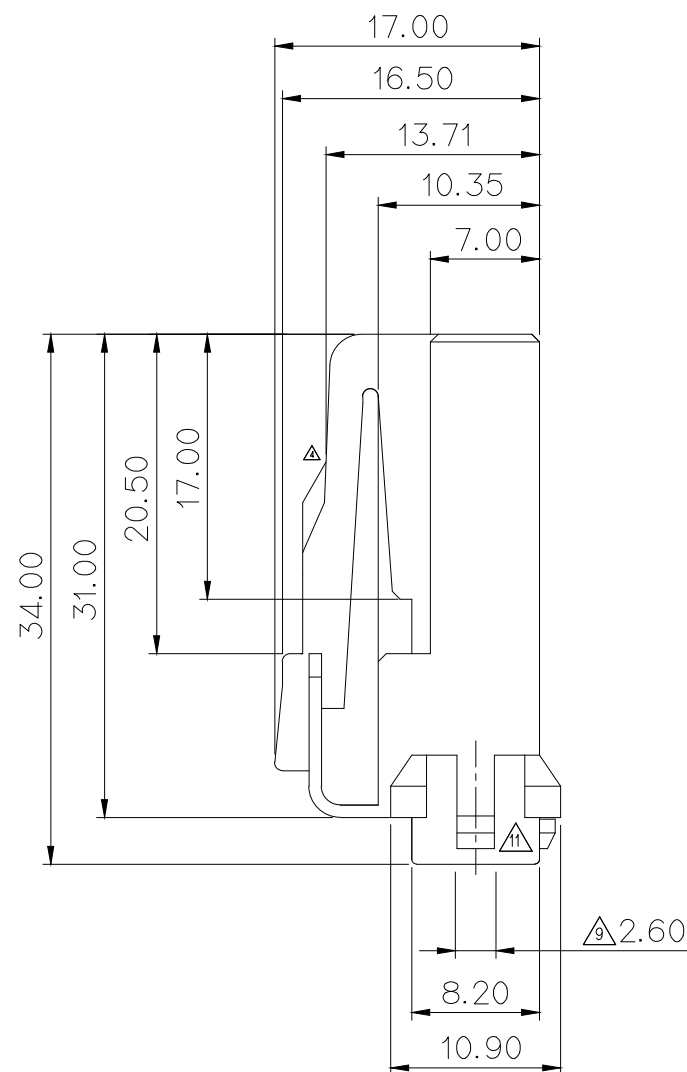

SECTION. B-B

APPROVED

2017-08-10

**KOREA ELECTRIC
TERMINAL CO., LTD.**
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

MATERIAL		PA 66	 KOREA ELECTRIC TERMINAL CO., LTD.
FINISH		SEE NOTE	
WIRE RANGE		CLASS	375
INSULATION		TYPE	
TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO.  MG610658 / MG613689 / MG615575
PART NAME			
375 1P PLUG HOUSING			