


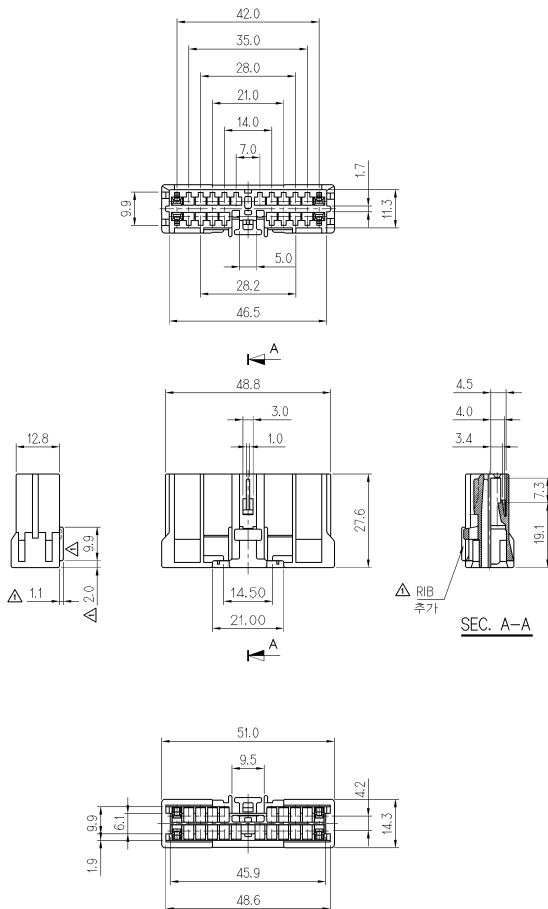

NO.	MATERIAL	COLOR
0	P B T	NATURAL
1		RED
2		BLUE
3		YELLOW
4		GRAY
5		BLACK
6		W/GREEN
7		BROWN
8		GREEN

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.10	

주 기

1. 기능상 유해한 BURR 및 WELDLINE 등이 없을것.
2. 적용 TERMINAL: ST730497, ST730498
3. 적용 HOUSING: MG620787
4. 적용 REAR HOLDER: MG630788
5. CONNECTOR 삽입력 & 발거력: 9.0Kg 이하

NOTE

1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST730497, 730498
2. APPLICABLE HOUSING : MG620787
2. APPLICABLE REAR HOLDER : MG630788
6. CONNECTOR RETENTION FORCE : IN 9.0Kg MAX OUT 5.0Kg MAX



ISSUE MARK

					MATERIAL	SEE NOTE	KET (ENGINEERED)	KOREA ELECTRIC
					FINISH	NATURAL		TERMINAL CO., LTD.
					WIRE RANGE		CLASS	.070 II
					INSULATION		TYPE	
△	시험완료(980202)검사 수검				IND			'99.02.10
LTR	REVISION RECORD				DR	CHK	APP	DATE
					PREPARED BY DATE			
					SEE TABLE	SCALE	PART NO	
					1/1			MG610786
DR	WK CHOI	97.12.08	CHK	97.12.08				
CHK	CHOI	97.12.09	APP	97.12.11				
					PART NAME			
					SDL II 22 PLUG HOUSING			