


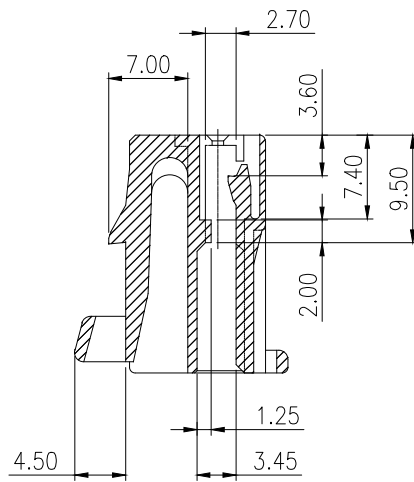
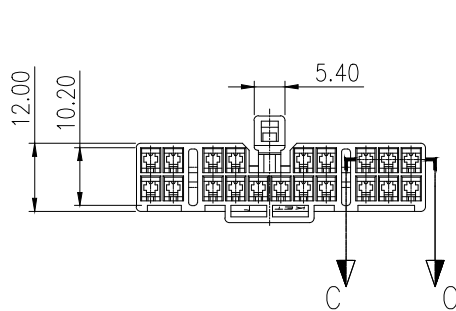
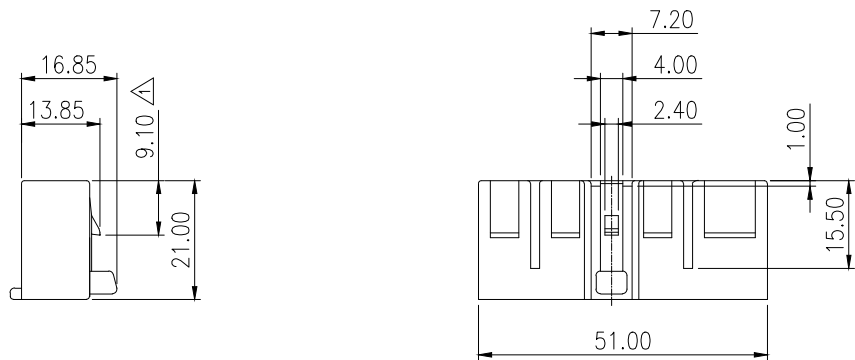


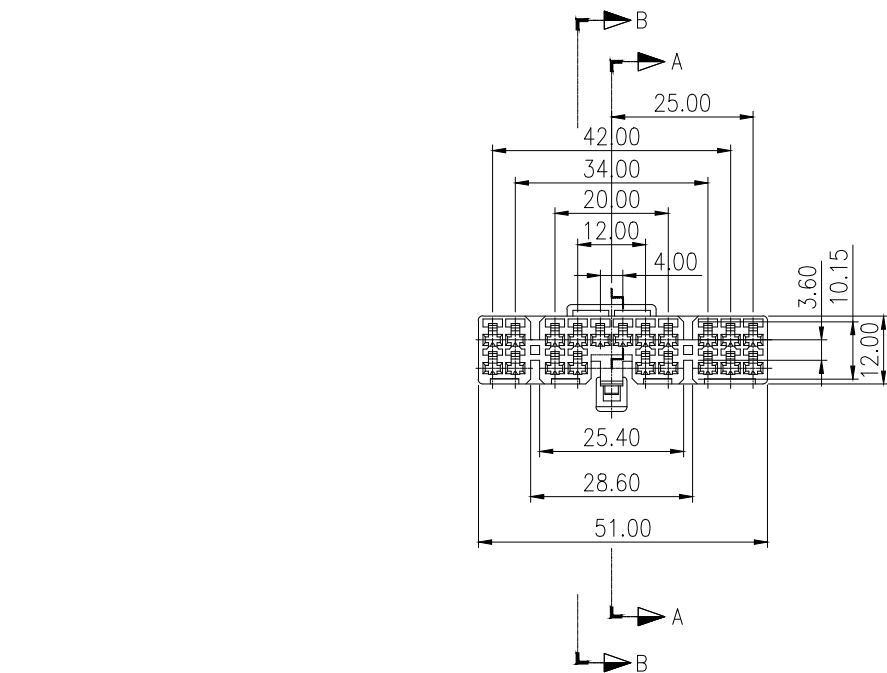

SECTION A-A
(S=2/1)



SECTION B-B

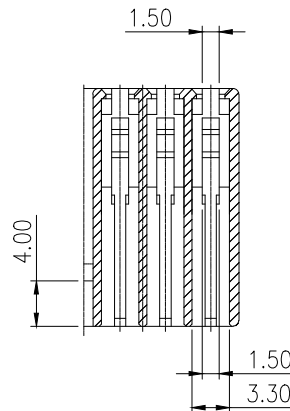

SECTION C-C
(S=2/1)


GENERAL TOLERANCE (HOUSING)									USED ON
10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE	
±0.15	±0.20	±0.30	±0.40	±0.50	±0.75	±0.9	±1.4	±30'	

NOTE

1. MUST BE FREE OF BURR, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE HOUSING P/NO :MG621121
3. APPLICABLE TERMINAL :090 TAB TM'L(P/NO:ST 730365 ETC.)
4. TERMINAL RETENTION FORCE: (LANCE MIN 6kgf),
5. CONN'T ASSY INSERTION FORCE : MAX 14kgf
6. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,
MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBDEs)
SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE
CONCENTRATION PRESCRIBED UNDER EU ELV
DIRECTIVE.

주 기

1. 기능상 유해한 BURR 및 변형등이 없을 것.
2. 구성부품 PART NO: MG 620809
3. 적용 단자 : 090 TAB TM'L(P/NO:ST 730365 ETC.)
4. RETENTION FORCE : 6 Kg/cm² 이상
5. CONNECTOR 삽입력 : 14Kg/cm² 이하
6. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

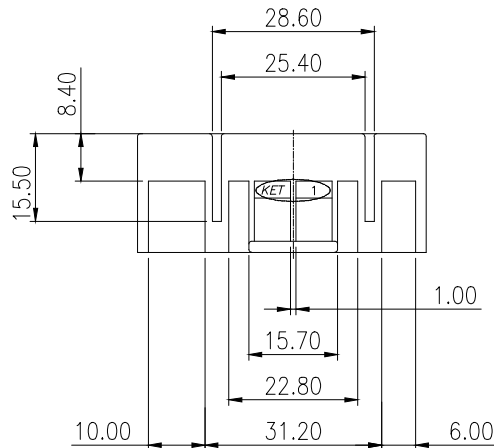

						MATERIAL	PBT	KIET [ENGINEERED]	KOREA ELECTRIC TERMINAL CO., LTD.	
						PINISH	NATURAL			
						WIRE RANGE				CLASS
						INSULATION		TYPE		
	LOCK부 수정		WON	KO		01.12.26	TOLERANCE EXCEPT AS NOTED		SCALE	PART NO.
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	±0.2	1/1	MG 610808	
DR.	WON 95.06.22		CHK.	SIK	95.06.22		PART NAME			
CHK.	7/11		APP.		090-20P PLUG HOUSING					